

TECHNICAL DATA
MODEL J55C-F
BJM Pumps® SUBMERSIBLE PUMP-CAST IRON
For High Temperature Service
GENERAL DATA

MAX. FLOW: GPM (L/min)	515 GPM (1949 L/min)
MAX. HEAD: ft (m)	91' (27.7 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SUMP, HIGH TEMPERATURE
MINIMUM SUBMERSION DEPTH: in(mm)	16" (407 mm)
SOLID SIZE: in (mm)	3/8" (9.5 mm)
STRAINER OPENING	0.375" (9.5 mm) diameter
IMPELLER DIAMETER: in (mm)	5.39" (137 mm)
DISCHARGE SIZE	4" NPT FEMALE
SLIDE RAIL SYSTEM	4"
PUMP WEIGHT, without cable: lbs (kg)	175 lbs (79.6 kg)
SHIPPING WEIGHT: lbs (kg)	220 lbs (100 kg)

CONSTRUCTION/MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/CERAMIC – VITON® FITTED
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE – VITON FITTED
MOTOR CASING	304 SS
PUMP VOLUTE	CAST IRON
IMPELLER- MULTI VANE	CAST IRON
STRAINER	STEEL
LIPSEAL & O-RINGS	VITON
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN MOTOR STATOR	OIL-FILLED W/ SHELL FM 32, NSF APPROVED
QTY. OIL IN SEAL CHAMBER	45.6 US FL. OZ. (1350 C.C.), SHELL FM 32, NSF APPROVED
BALL BEARING: OIL LUBRICATED UPPER	6305
BALL BEARING: OIL LUBRICATED LOWER	6207 (x2)

ELECTRICAL /MOTOR DATA

MOTOR: TYPE, RATING HP	Submersible, Oil-Filled , Continuous Duty, 7.5			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	R, 428°F (220°C)			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	23.1	21	10.5	7.6
LOCKED ROTOR CURRENT (LRA)	138.6	126	63	47
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)			
POWER CORD: GAGE; LENGTH	A.W.G. 10/4; 33' (10 m), HIGH TEMP. RATED CORD			
SENSOR CABLE: GAGE; LENGTH	A.W.G. 18/4; 33' (10 m), HIGH TEMP. RATED CABLE			
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)			
SEAL LEAK DETECTOR ¹	Seal Minder®; MOISTURE SENSING PROBE			

1- Requires a seal fail circuit in control panel for warning signal.


©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive
 New Haven, CT. 06513, USA
 (860)399-5937 - (877) BJM-PUMP - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Viton® is a registered trademark of DuPont Performance Elastomers.
 Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

MODEL: J55C-F

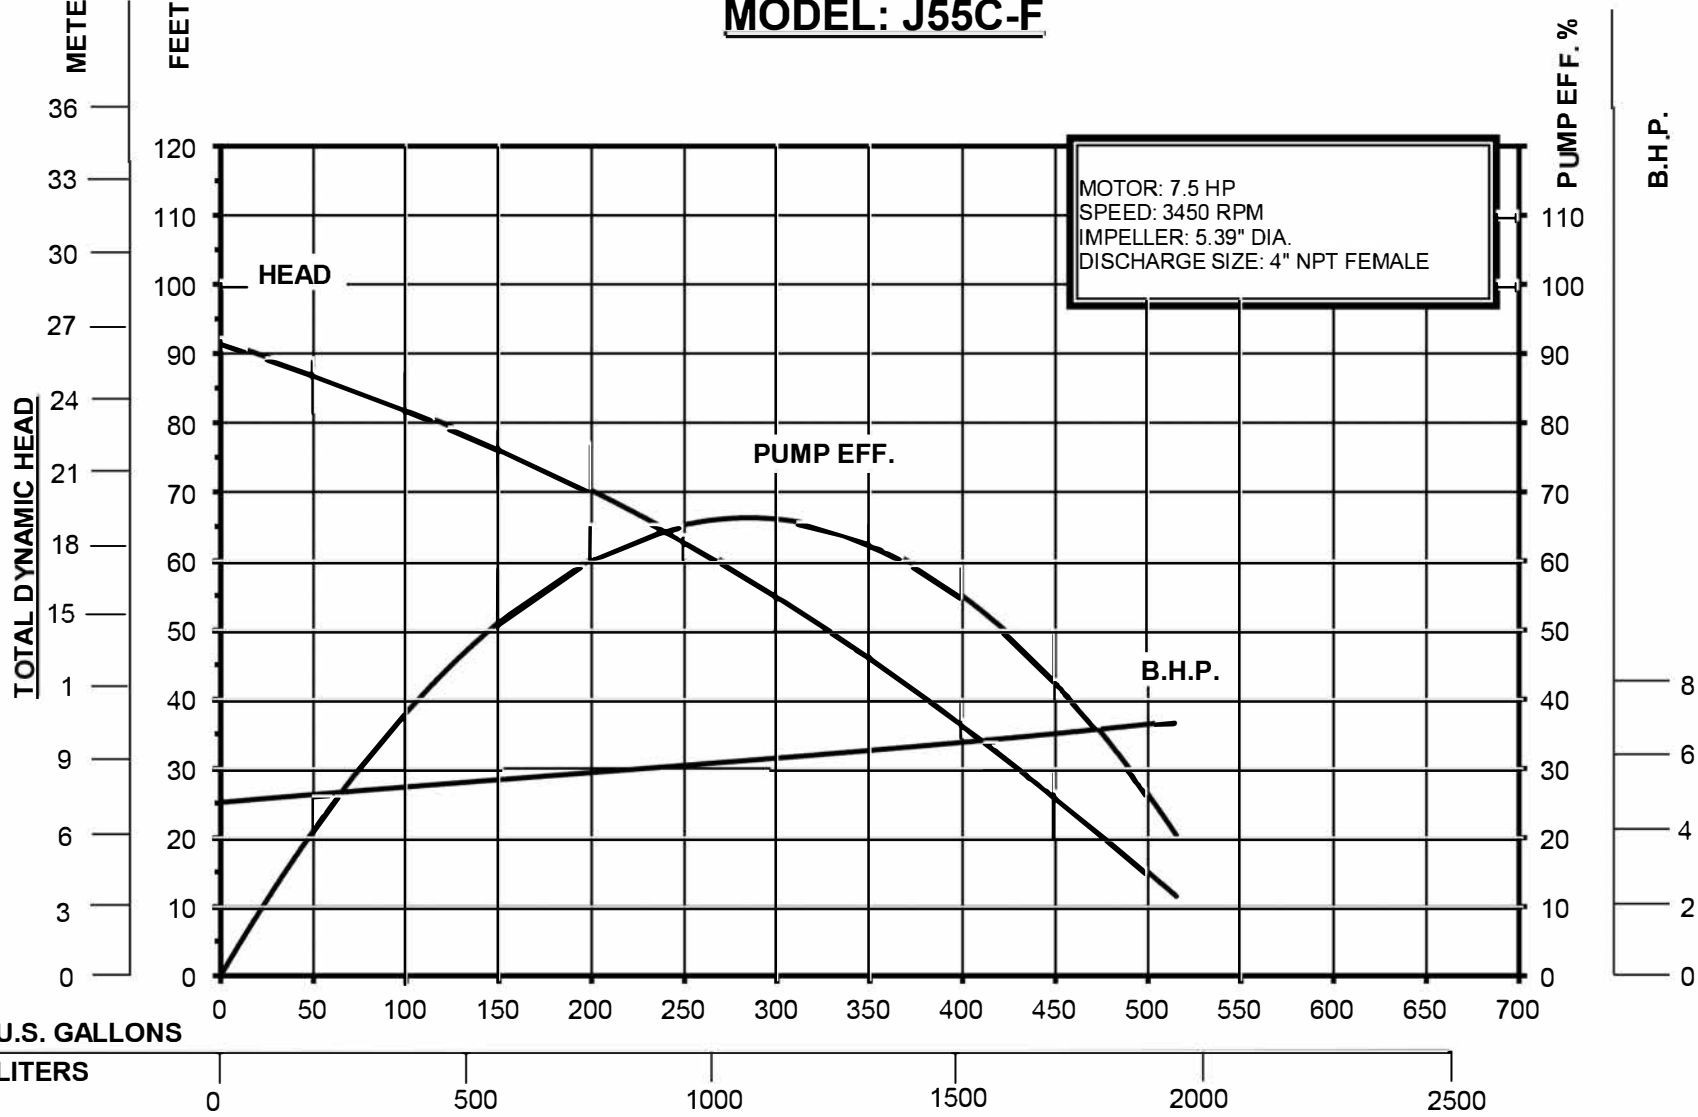

MOTOR: 7.5 HP
 SPEED: 3450 RPM
 IMPELLER: 5.39" DIA.
 DISCHARGE SIZE: 4" NPT FEMALE

3/24/2020

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE