

**TECHNICAL DATA**  
**MODEL JX150CSS**  
**BJM Pumps® SUBMERSIBLE PUMP - 316 SS**  
**GENERAL DATA**

MAX. FLOW: GPM (L/min)	730 GPM (2767 L/min)
MAX. HEAD: ft (m)	151' (46 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SUMP, SIDE DISCHARGE
MINIMUM SUBMERSION DEPTH: in(mm)	10.8" (470 mm)
SOLID SIZE: in (mm)	1.0" (25 mm)
STRAINER OPENING	1.0" (25 mm) diameter
IMPELLER DIAMETER: in (mm)	6.42" (163 mm)
DISCHARGE SIZE	6" ANSI SLIP WELD FLANGE
SLIDE RAIL SYSTEM	6"
PUMP WEIGHT, w/50' of Cable: lbs (kg)	374 lbs (170 kg)
SHIPPING WEIGHT: lbs (kg)	440 lbs (200 kg)

**CONSTRUCTION / MATERIAL DATA**

MECHANICAL SEAL - UPPER	CARBON/CERAMIC
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE - FKM
MOTOR CASING	316 SS
PUMP VOLUTE	316 SS
IMPELLER- MULTI VANE	316 SS
STRAINER	316 SS
LIPSEAL & O-RINGS	FKM
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	316 SS
BALL BEARING: PERM. LUBE. UPPER	6306
BALL BEARING: PERM. LUBE. LOWER	6309/7309 TANDEM DESIGN

**ELECTRICAL / MOTOR DATA**

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 20 (CONTINUOUS DUTY <sup>3</sup> )	
MOTOR RPM	3450	
MOTOR INSULATION CLASS	H	
MOTOR SERVICE FACTOR	1.1	
VOLTAGE <sup>1</sup> - 3 PH, 60 Hz	460V	575V option
CURRENT F.L.A.	23.0	18.4
LOCKED ROTOR CURRENT (LRA)	120	96
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN MOTOR WINDINGS, 302°F (150°C)	
POWER CORD: GAGE; LENGTH	A.W.G. 8/4; 50' (15.2 m), SOOW	
SENSOR CABLE	A.W.G. 18/4; 50' (15.2 m), SOOW	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	
SEAL LEAK DETECTOR <sup>2</sup>	Seal Minder®; MOISTURE SENSING PROBE	

1- Available in other voltages (and in 50 Hz).

2- Requires a seal fail circuit in control panel for warning signal.

3 - NOTE: STAINLESS STEEL PUMPS **MAY NOT BE SUITABLE** FOR CONTINUOUS DUTY IN ALL APPLICATIONS. PLEASE CONSULT WITH BJM PUMPS. MAY BE NECESSARY TO OFFER 'F' SERIES HIGH TEMPERATURE PUMPS WHEN CONSIDERING CONTINUOUS DUTY OPERATION.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.


104 John W Murphy Drive

New Haven, CT. 06513, USA

Tel: (860)399-5937 - Fax: (860)399-7784



# MODEL: JX150CSS

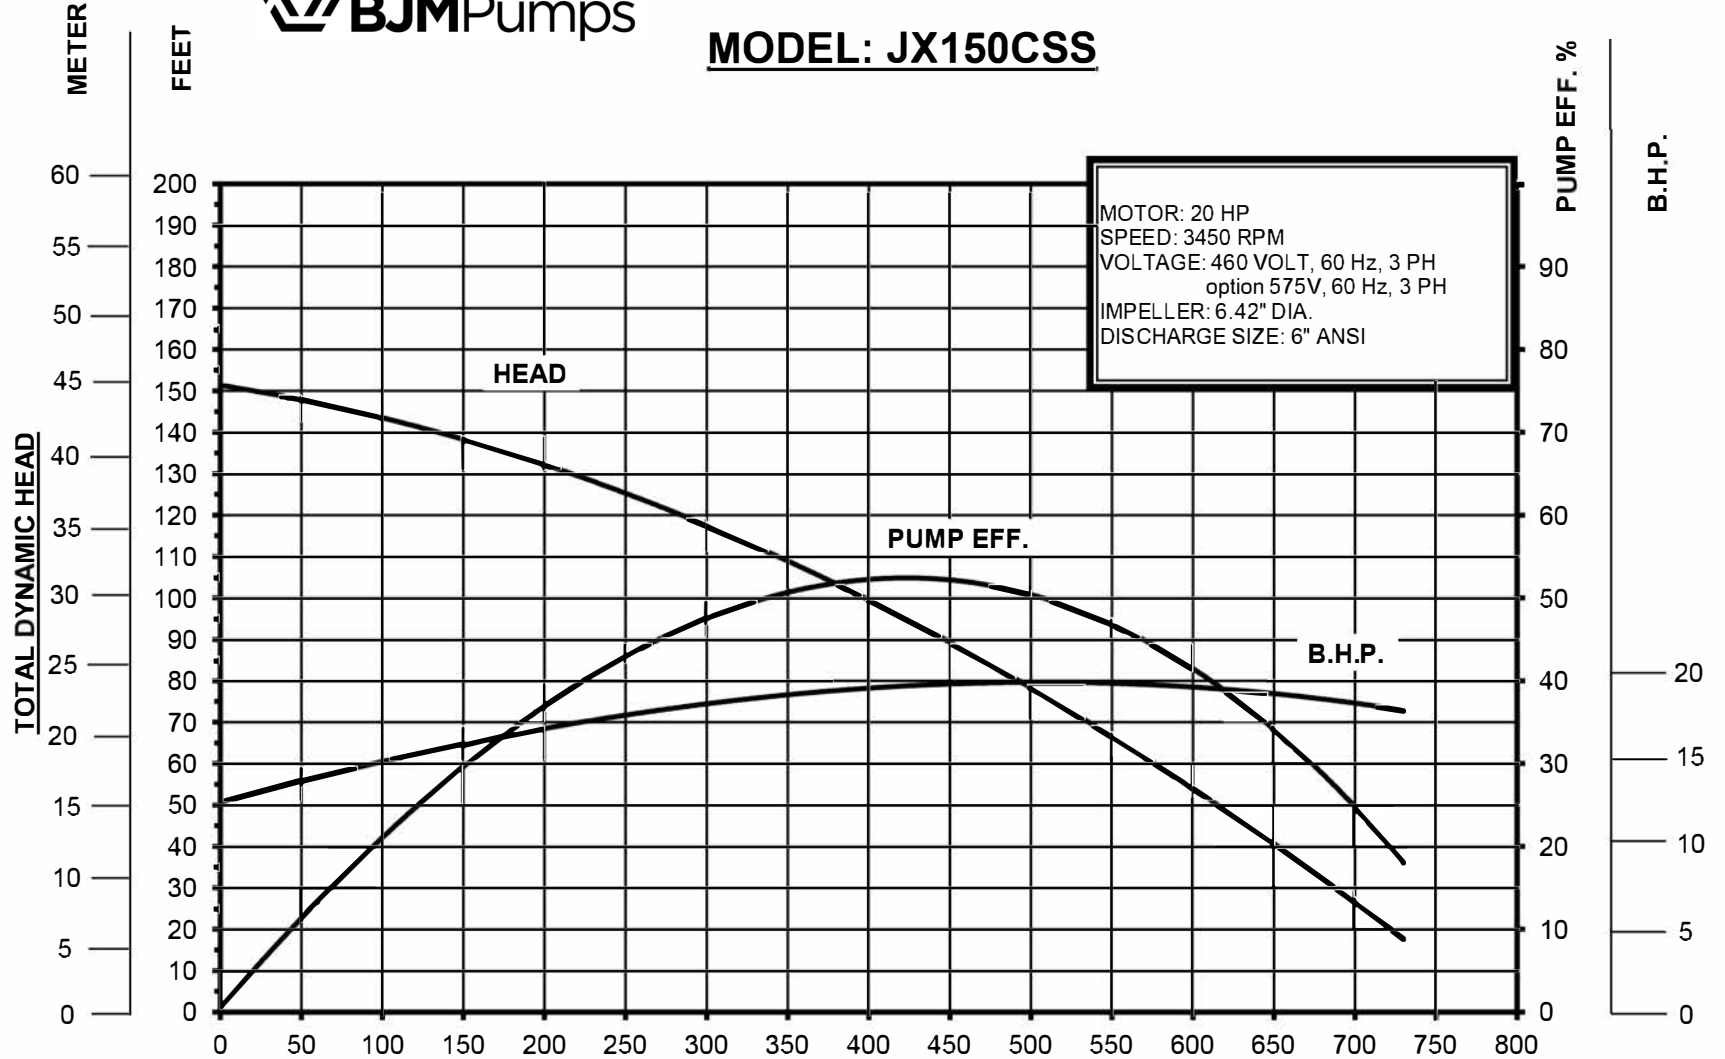

3/26/2020

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE