

TECHNICAL DATA
MODEL JX400SS
BJM Pumps® SUBMERSIBLE PUMP - 316 SS
GENERAL DATA



MAX. FLOW: GPM (L/min)	66 GPM (249 L/min)
MAX. HEAD: ft (m)	35' (10.6 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SUMP, SIDE DISCHARGE
MINIMUM SUBMERSION DEPTH: in(mm)	8.5" (216 mm)
SOLID SIZE: in (mm)	1/8" (3.1 mm)
STRAINER OPENING	0.375"x0.1875" (9.5x4.7 mm) slot
IMPELLER DIAMETER: in (mm)	3.75" (95 mm)
DISCHARGE SIZE	2" NPT-MALE
PUMP WEIGHT, without cable: lbs (kg)	32 lbs (14.5 kg)
SHIPPING WEIGHT: lbs (kg)	38 lbs (17.3 kg)

CONSTRUCTION / MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/CERAMIC
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE
MOTOR CASING	316 SS
PUMP VOLUTE	316 SS
IMPELLER- MULTI VANE	316 SS
STRAINER	316 SS
LIPSEAL & O-RINGS	VITON
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	316 SS
QTY. OIL IN SEAL CHAMBER	5.1 U.S. FL. OZ. (150 C.C.)
BALL BEARING: PERM. LUBE. UPPER	6201
BALL BEARING: PERM. LUBE. LOWER	6201

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 0.5 (CONTINUOUS DUTY ²)	
MOTOR RPM	3450	
MOTOR INSULATION CLASS	F	
MOTOR SERVICE FACTOR	1.1	
VOLTAGE ¹ - 1 PH, 60 Hz	115V	230V
CURRENT F.L.A.	7.6	3.8
LOCKED ROTOR CURRENT (LRA)	24	12
MOTOR PROTECTION	THERMAL BREAKER	
POWER CORD: GAGE; LENGTH	A.W.G. 16/3; 33' (10 m), STOW	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	

1- Available in other voltages (and in 50 Hz).

2 - NOTE: STAINLESS STEEL PUMPS **MAY NOT BE SUITABLE** FOR CONTINUOUS DUTY IN ALL APPLICATIONS. PLEASE CONSULT WITH BJM PUMPS. MAY BE NECESSARY TO OFFER 'F' SERIES HIGH TEMPERATURE PUMPS WHEN CONSIDERING CONTINUOUS DUTY OPERATION.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.


104 John W Murphy Drive
 New Haven, CT. 06513, USA

Tel: (860)399-5937 - Fax: (860)399-7784



BJMPumps

MODEL: JX400SS

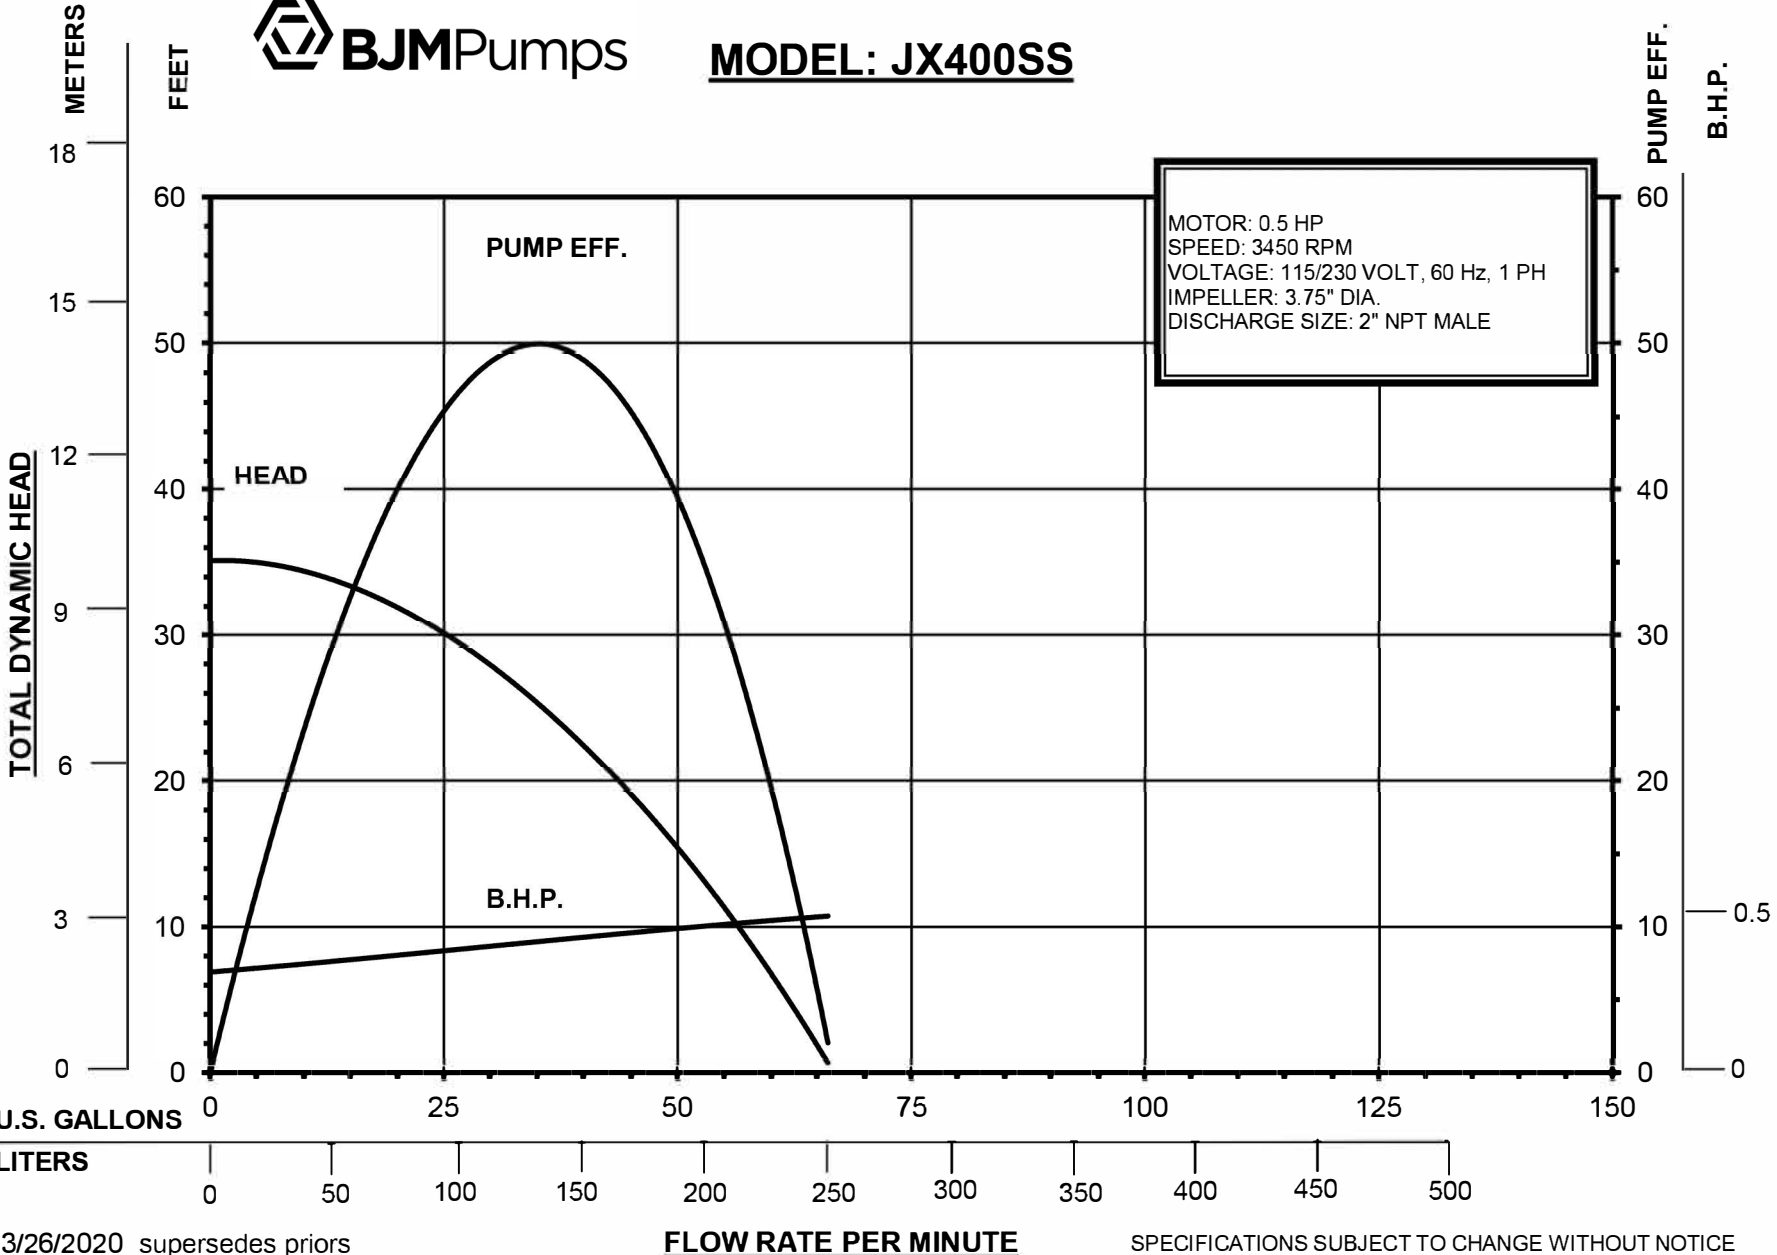

3/26/2020 supersedes priors

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE