

**TECHNICAL DATA**  
**MODEL KZN55RF**  
**HI-HARD SEVERE DUTY SLURRY PUMP – CHROME IRON / HI HARD VOLUTE**  
**For High Temperature Service**

**GENERAL DATA**

MAX. FLOW: GPM (L/min)	594 GPM (2248 L/min)
MAX. HEAD: ft (m)	57' (17.3 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SLURRY HANDLING, HIGH TEMPERATURE
SOLID SIZE: in (mm)	1" (25.4 mm)
STRAINER OPENING: in (mm)	1.375" (34.9 mm)
IMPELLER DIAMETER: in (mm)	8.66" (220 mm)
DISCHARGE SIZE	4" NPT-MALE (3" NPT-MALE OPTIONAL)
PUMP WEIGHT, without cable: lbs (kg)	337 lbs (153.2 kg)
SHIPPING WEIGHT: lbs (kg)	390 lbs. (177.3 kg)

**CONSTRUCTION/MATERIAL DATA**

DUAL MECHANICAL SEALS	SILICON CARBIDE/SILICON CARBIDE - VITON® FITTED
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON WITH INTERIOR HARDNESS COATING TO 1180 DPH(Rc 71)
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	MULTI VANE, HI-CHROME
STRAINER/STAND	STEEL
LIP SEALS & O-RINGS	VITON
ROTOR SHAFT	410 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN MOTOR STATOR	OIL-FILLED W/ SHELL FM 32, NSF APPROVED
QTY. OIL IN SEAL CHAMBER	49 U.S. FL. OZ. (1450 C.C.), SHELL FM 32, NSF APPROVED
BALL BEARING: OIL LUBRICATED UPPER	6306
BALL BEARING: OIL LUBRICATED LOWER	6308

**ELECTRICAL /MOTOR DATA**

MOTOR: TYPE, RATING HP	Submersible, Oil-Filled , Continuous Duty, 7.5			
MOTOR RPM	1750			
MOTOR INSULATION CLASS	R, 428°F (220°C)			
MOTOR SERVICE FACTOR	1.15			
VOLTAGE - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	21.4	19.5	9.5	7.8
LOCKED ROTOR CURRENT (LRA)	143	130	65	48
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)			
POWER CORD: GAGE; LENGTH	A.W.G. 10/4; 50' (15.2m), HIGH TEMP. RATED CORD			
SENSOR CABLE: GAGE; LENGTH	A.W.G. 18/4; 50' (15.2m), HIGH TEMP. RATED CABLE			
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)			
SEAL LEAK DETECTOR <sup>1</sup>	Seal Minder®; MOISTURE SENSING PROBE			

1- Requires a seal fail circuit in control panel for warning signal.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive  
 New Haven, CT. 06513, USA  
 Tel: (860)399-5937 - Fax: (860)399-7784


REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Viton® is a registered trademark of DuPont Performance Elastomers.  
 Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.



**BJMPumps**

**MODEL: KZN55RF**

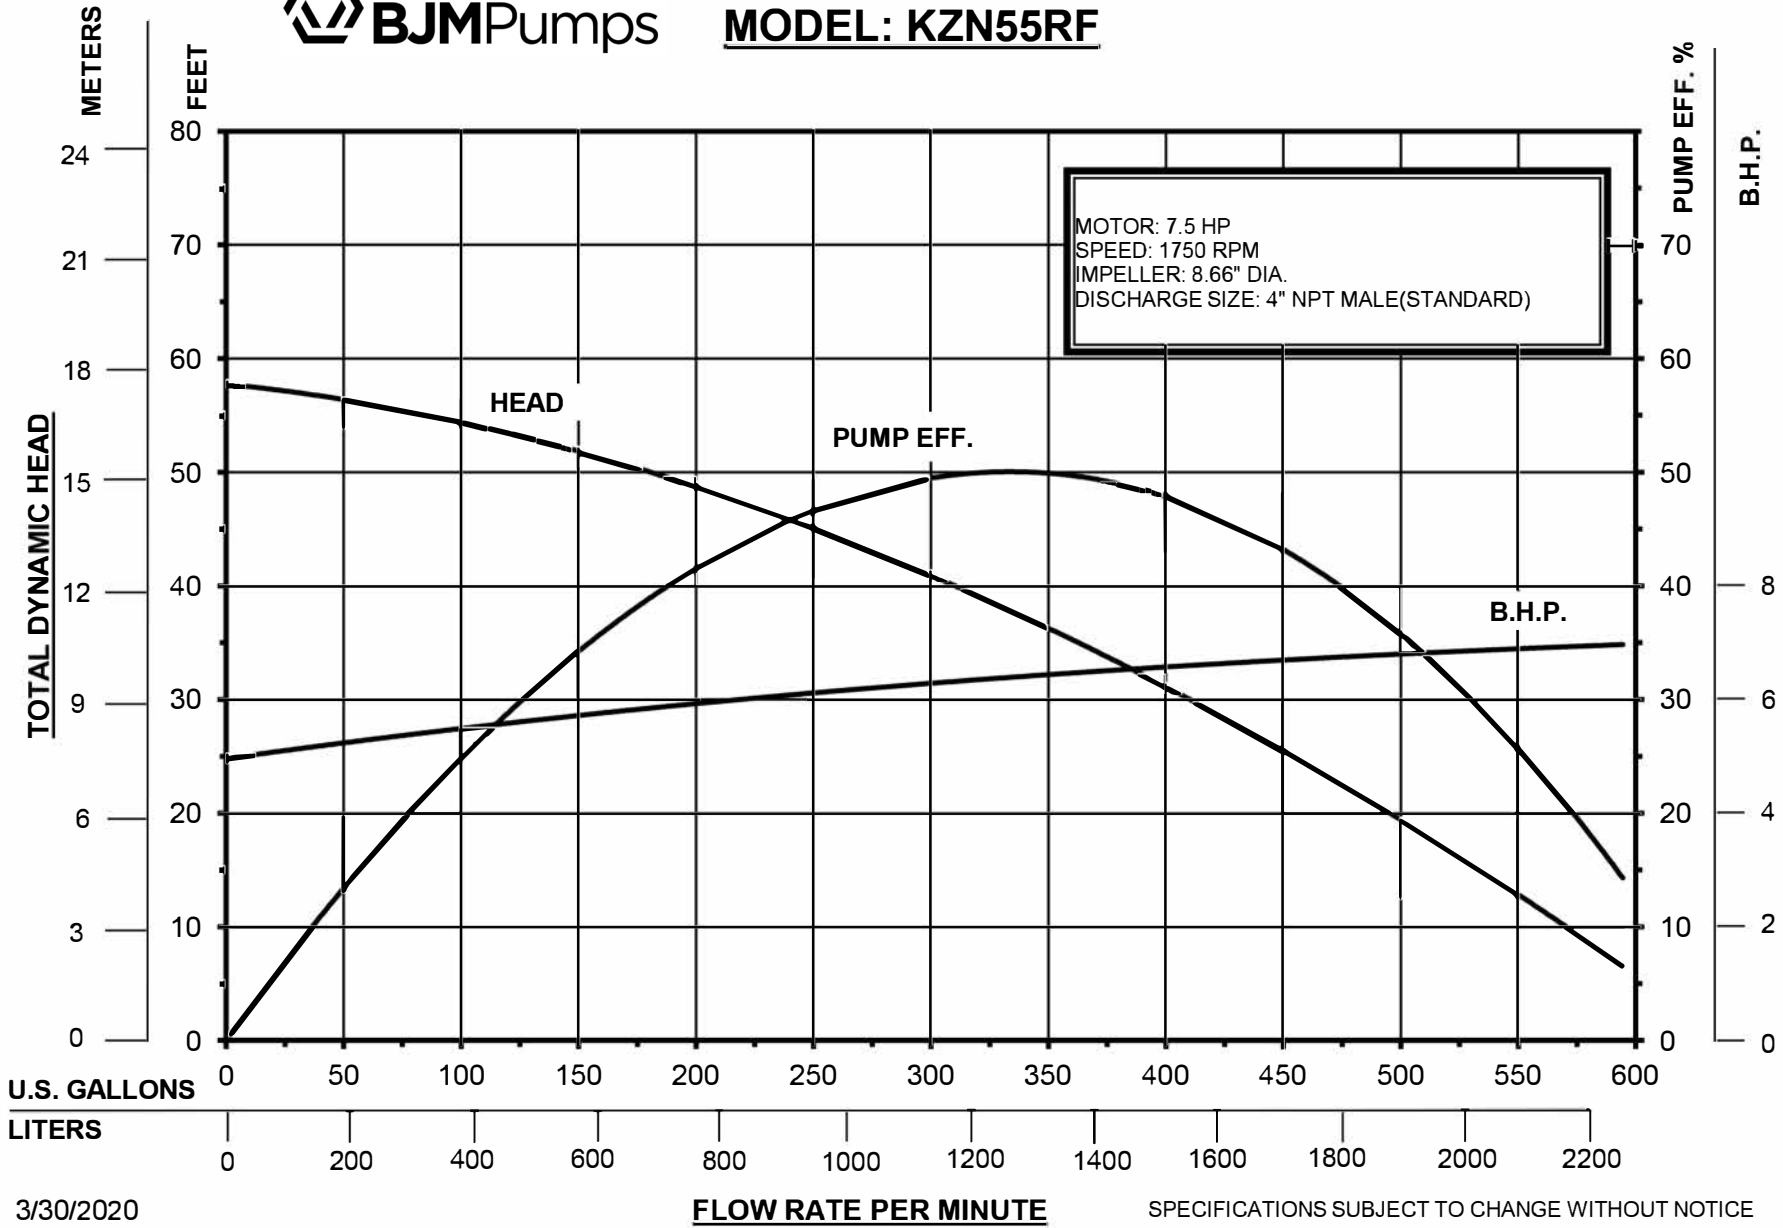

3/30/2020

**FLOW RATE PER MINUTE**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE