

**TECHNICAL DATA**  
**MODEL HAZ75**  
**MSHA APPROVED PUMP AND CONTROL ASSEMBLY**  
**HEAVY DUTY SLURRY PUMP – CHROME IRON / HARDENED DUCTILE IRON**

**GENERAL DATA**

MAX. FLOW: GPM (L/min)	655 GPM (2480 L/min)
MAX. HEAD: ft (m)	61' (18.6 m)
PUMP TYPE	SLURRY HANDLING
SOLID SIZE: in (mm)	1" (25.4 mm)
STRAINER OPENING: in (mm)	1.375" (34.9 mm)
PUMP DOWN WATER LEVEL: in (mm)	12" (305 mm)
IMPELLER DIAMETER: in (mm)	8.97" (228 mm)
DISCHARGE SIZE	4" NPT-MALE
SHIPPING WEIGHT: lbs (kg)	Approx. 420 lbs. (191 kg)

**CONSTRUCTION / MATERIAL DATA**

DUAL MECHANICAL SEALS	SILICON CARBIDE/SILICON CARBIDE
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	MULTI VANE, HI-CHROME
STRAINER/STAND	STEEL
LIP SEALS & O-RINGS	BUNA-N
ROTOR SHAFT	410 SS
QTY. OIL IN SEAL CHAMBER	49 U.S. FL. OZ. (1450 C.C.)
BALL BEARING: PERM. LUBE. UPPER	6306
BALL BEARING: PERM. LUBE. LOWER	6308

**ELECTRICAL / MOTOR DATA**

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 10 (CONTINUOUS DUTY)	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	H	
MOTOR SERVICE FACTOR	1.15	
VOLTAGE - 3 PH, 60 Hz	460V	575V
CURRENT F.L.A.	13	10.5
LOCKED ROTOR CURRENT (LRA)	77	55
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD	
POWER CORD: GAGE; LENGTH	A.W.G. 10/5; 50' (15.2m), SOOW, MSHA listed	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	


©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy  
 New Haven, CT. 06513, USA  
 Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES  
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



**MODEL: HAZ75**

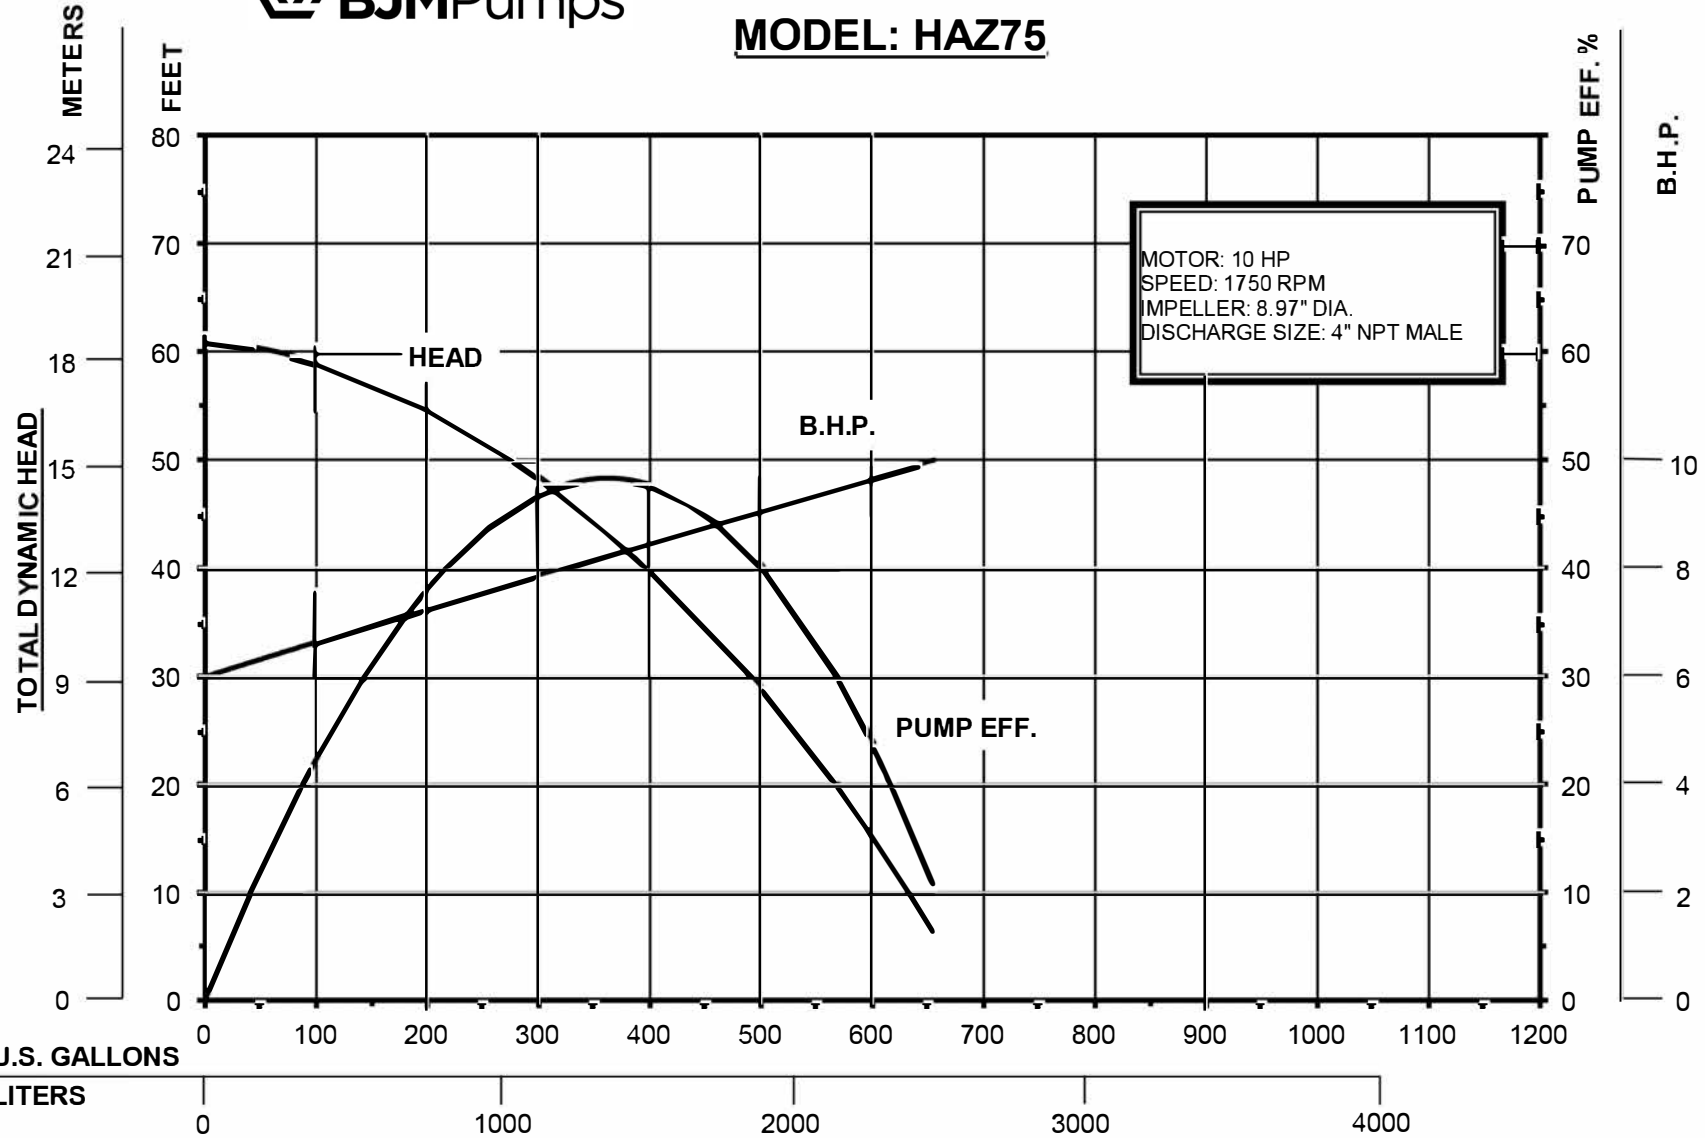

MOTOR: 10 HP  
SPEED: 1750 RPM  
IMPELLER: 8.97" DIA.  
DISCHARGE SIZE: 4" NPT MALE

3/24/2020

**FLOW RATE PER MINUTE**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE