

**Dwg:**

DS-C07-024

Rev:

1

Date:

9/9/2025

GENERAL DATA

APPROVALS:	CSA APPROVAL (AVAILABLE UPON REQUEST)	
MAX. FLOW:	72 GPM (272.5 LPM)	
MAX. HEAD:	55' (16.8m)	
MAX. SUBMERSION DEPTH:	65' (20 m) or limited to length of power cord, Consult factory for deeper depths	
PUMP TYPE:	DEWATERING, SIDE DISCHARGE, HIGH TEMP	
MINIMUM SUBMERSION DEPTH FOR CONT. DUTY ³ :	16" (406.4 mm)	
PUMP DOWN WATER LEVEL:	5.25" (133.35 mm)	
SOLID SIZE:	0.2" (4.7 mm)	
STRAINER OPENING:	0.2" (6.3 mm)	
IMPELLER DIAMETER:	4.33" (110 mm)	
DISCHARGE SIZE:	2" NPT-MALE	
SLIDE RAIL SYSTEM	2" STAINLESS STEEL	
PUMP WEIGHT (without cable):	55 lbs (24.9 kg)	
SHIPPING WEIGHT:	70 lbs (31.8 kg)	

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC, FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR CASING	316 SS
IMPELLER & VOLUTE	316 SS
STRAINER	316 SS
LIP SEAL & O-RINGS	FKM
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	316 SS
BEARING, OIL LUBRICATED, UPPER:	6203
BEARING, OIL LUBRICATED, LOWER:	6304

ELECTRICAL / MOTOR DATA

MOTOR: HP, TYPE, RATING	1, SUBMERSIBLE OIL FILLED, (CONTINUOUS DUTY ³)	
MOTOR RPM	3450	
MOTOR INSULATION CLASS	R, 428°F (220°C)	
MOTOR SERVICE FACTOR	1.1	
VOLTAGE - 1PH - 60HZ ¹	115V	230V
CURRENT F.L.A.	16	8.5
LOCKED ROTOR CURRENT (LRA)	70	35
STANDARD POWER CABLE: GAGE-LENGTH	AWG 14/4, 50' (15m) HIGH TEMP RATED CABLE	AWG 16/4, 50' (15m) HIGH TEMP RATED CABLE
CSA RATED POWER CABLE: GAGE-LENGTH	NOT AVAILABLE	AWG 12/4, 50' (15m) SEOOW
SENSOR CABLE: ² GAGE-LENGTH	AWG 18/4, 50' (15m) HIGH TEMP RATED CABLE	
START COMPONENTS	CAPACITOR AND START RELAY IN CONTROL PANEL	
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)	
SEAL LEAK DETECTOR ²	Seal Minder® MOISTURE SENSING PROBE	
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)	

1 - Available in other voltages for 50Hz

2 - Requires seal fail and thermal circuit in control panel for warranty validity.

3 - Continuous duty motor - see minimum submersion depth above.

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® JX750SSF

Dwg:




DS-C07-020

Rev:

1

Date:

7/23/2025

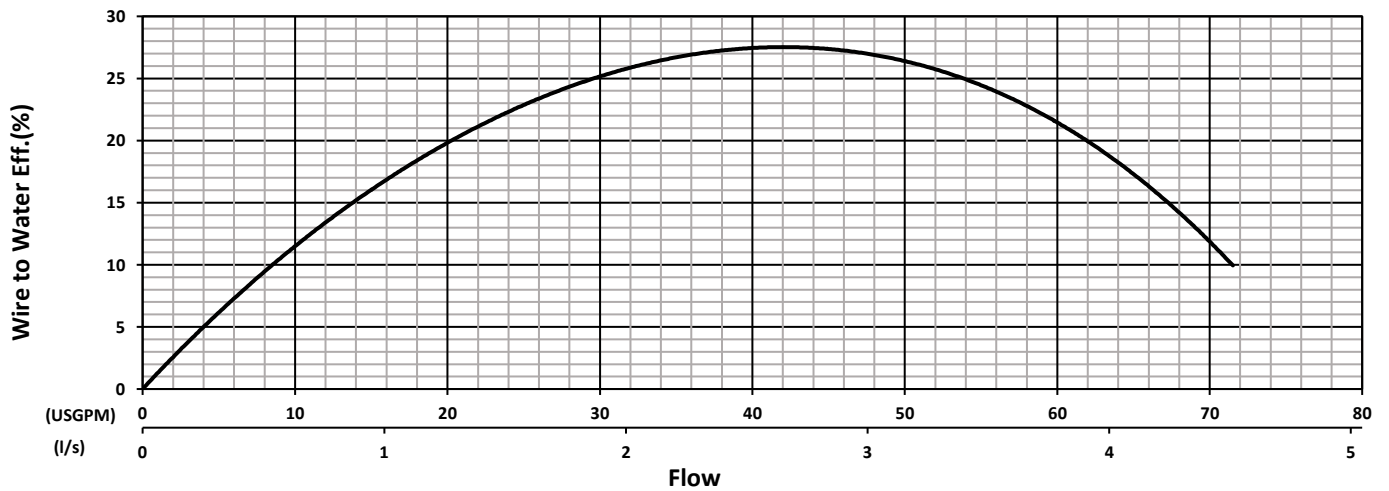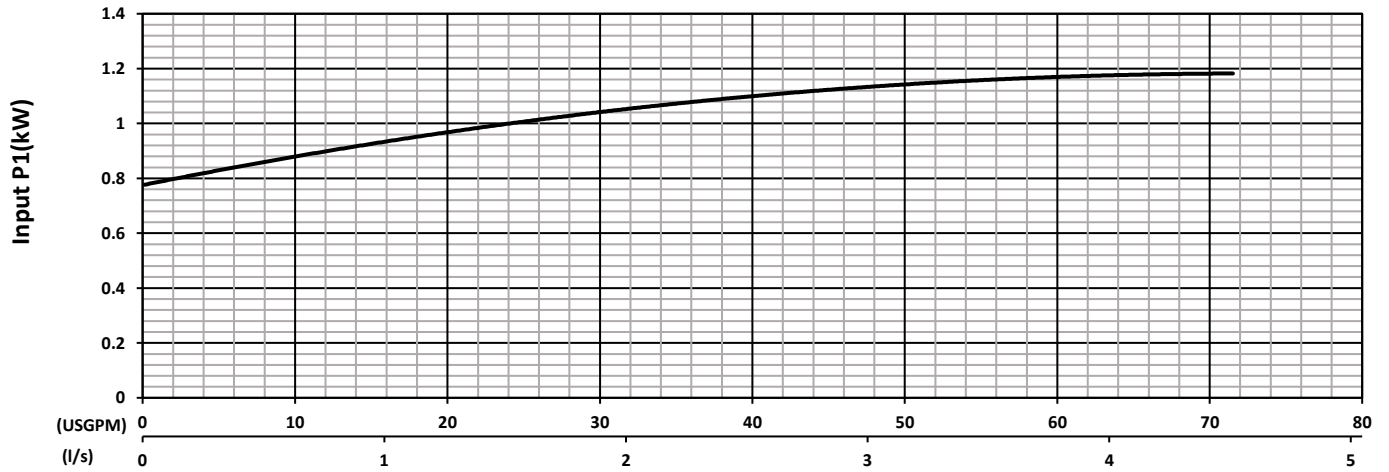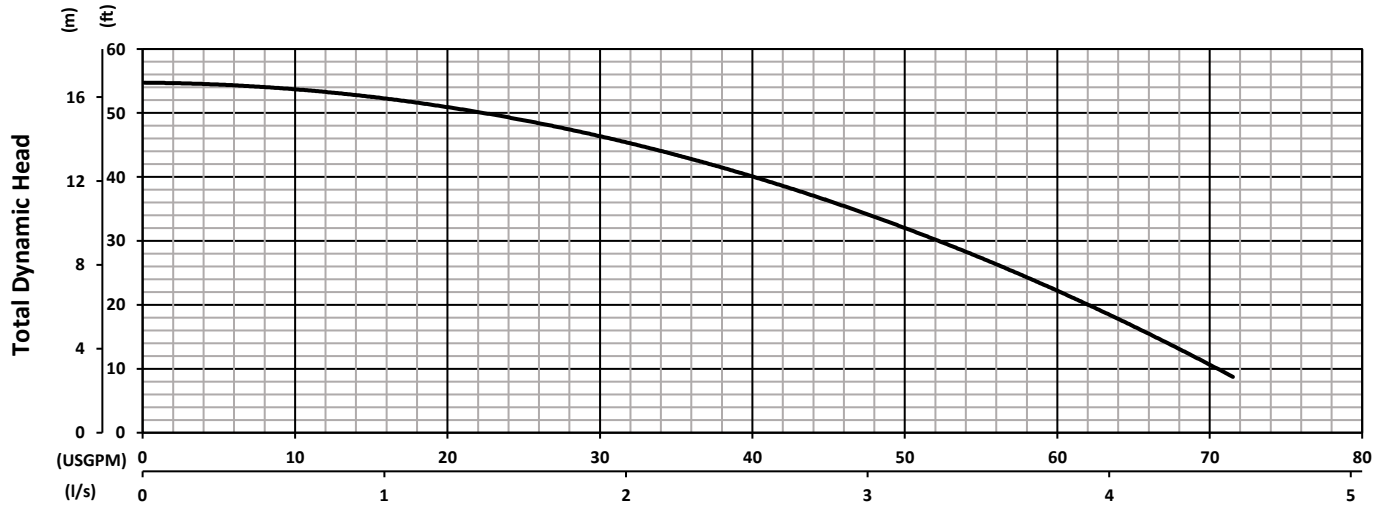

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

750SSF - Dual Units

Frequency	60 Hz
Pump Speed	3450 RPM
Impeller	110mm

Specifications subject to change without notice