

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps® RX08		
	Dwg:	DS-C22-006	Rev:	1	Date:	8/15/2025

GENERAL DATA

MAX. FLOW:	69 GPM (261.1 L/min)
MAX. HEAD:	44' (13.4m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	DEWATERING TOP DISCHARGE
PUMP DOWN WATER LEVEL:	2.25" (57 mm)
SOLID SIZE:	1/4" (6.3 mm)
STRAINER OPENING:	1/4" (6.3 mm)
IMPELLER DIAMETER:	4.34" (110 mm)
DISCHARGE SIZE	2" NPT-MALE
PUMP WEIGHT (without cable):	54 lbs (24.6 kg)
SHIPPING WEIGHT:	64 lbs (29.1 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/SILICON CARBIDE, FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR CASING	316 SS
PUMP VOLUTE	316 SS
IMPELLER	316 SS
STRAINER	316 SS
BOTTOM PLATE	316 SS
LIP SEAL & O-RINGS	FKM
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	316 SS
BALL BEARING: PERM. LUBE. UPPER	6203
BALL BEARING: PERM. LUBE. LOWER	6304

ELECTRICAL / MOTOR DATA

MOTOR: HP, TYPE, RATING	1, SUBMERSIBLE , (CONTINUOUS DUTY)			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE - 60Hz ¹	208V	230V	460V	575V
CURRENT F.L.A.	3.5	3.2	1.6	1.3
LOCKED ROTOR CURRENT (LRA)	19.8	18	9	8
POWER CABLE: GAGE-LENGTH	AWG 16/4, 50' (15m) STOW			
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			

1 - Available in other voltages for 50Hz

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

(860) 631-3618 • www.flowsolutions.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® RX08

Dwg:




DS-C22-001

Rev:

1

Date:

8/7/2025

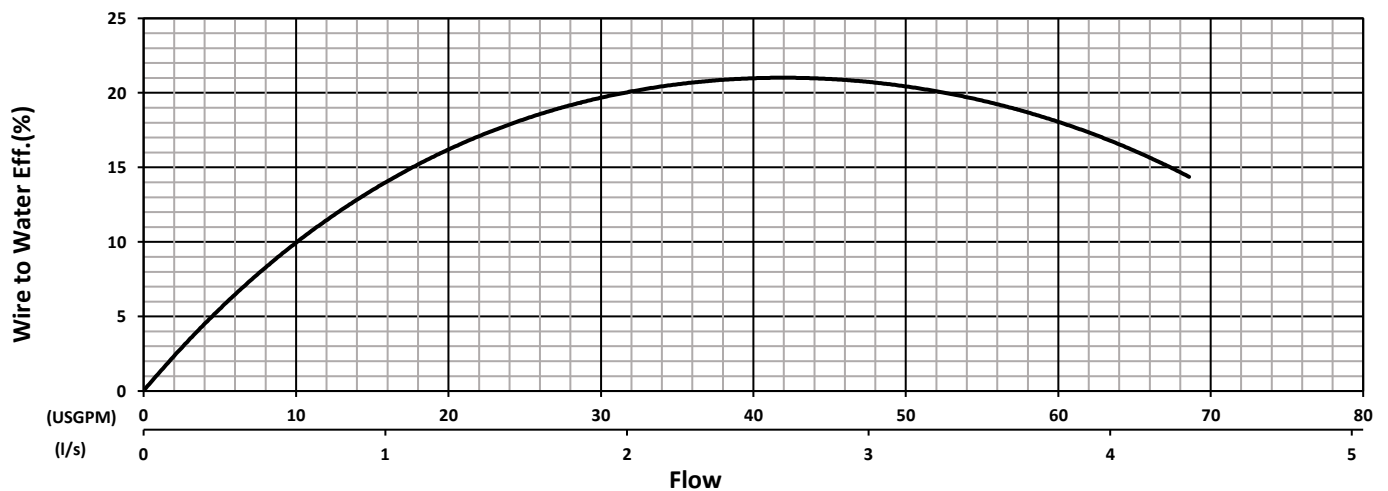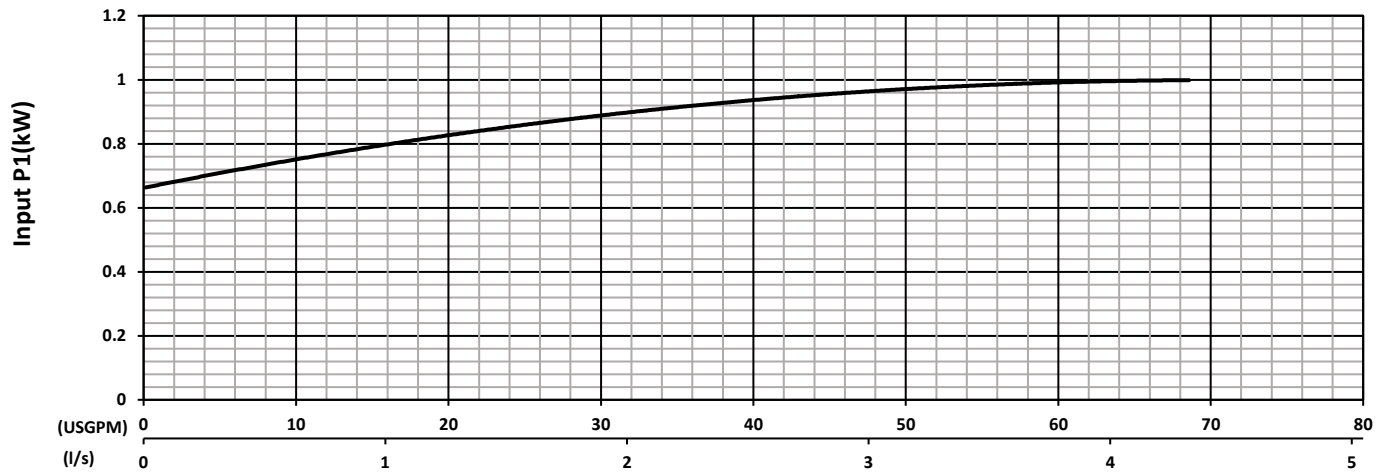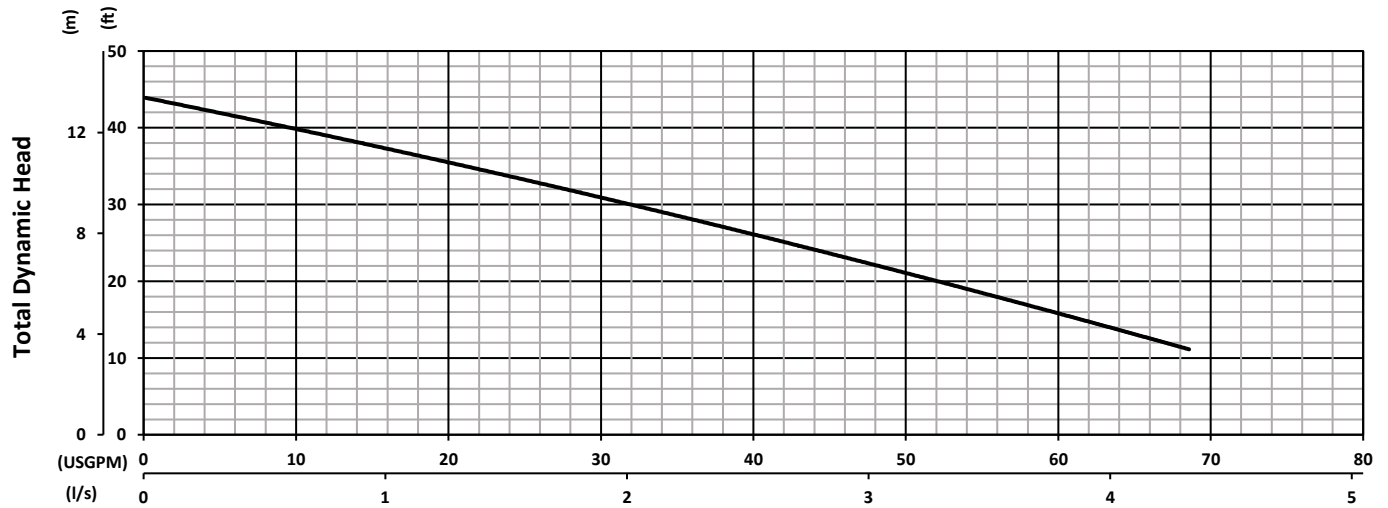

Flow

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

08 - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller 110mm

Specifications subject to change without notice