



INDUSTRIAL
FLOW
SOLUTIONS™

TECHNICAL DATA

BJM Pumps® XP-SK110C

Dwg:

DS-C38-008

Rev:

2

Date:

8/28/2025

GENERAL DATA

APPROVALS:	EXPLOSION PROOF FM APPROVED CLASS1, DIVISION 1, GROUP C & D	
MAX. FLOW:	787 GPM (2979.1 LPM)	
MAX. HEAD:	90' (27.4m)	
MAX. SUBMERSION DEPTH:	65' (20 m) or limited to length of power cord, Consult factory for deeper depths	
PUMP TYPE:	SOLIDS HANDLING, NON-CLOG SHREDDER	
MINIMUM SUBMERSION DEPTH FOR CONT. DUTY ² :	48.5" (1231.9 mm)	
SOLID SIZE:	4" (89 mm)	
IMPELLER DIAMETER:	10.04" (255 mm)	
DISCHARGE SIZE:	6" ANSI FLANGE	
SLIDE RAIL SYSTEM	6" NON-SPARKING	
PUMP WEIGHT (without cable):	560 lbs (254 kg)	
SHIPPING WEIGHT:	578 lbs (262 kg)	

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC, FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR HOUSING	CAST IRON, EPOXY COATED
PUMP VOLUTE	CAST IRON
SUCTION COVER	DUCTILE IRON
IMPELLER	DUCTILE IRON
IMPELLER SHREDDER BLADE	TUNGSTEN CARBIDE
LIP SEAL & O-RINGS	BUNA-N
ROTOR SHAFT	403SS
EXTERNAL HARDWARE	304 SS
BEARING, PERM. LUBRICATED, UPPER:	6306ZZC3
BEARING, PERM. LUBRICATED, LOWER:	7308BDB

ELECTRICAL / MOTOR DATA

MOTOR: HP, TYPE, RATING	15, SUBMERSIBLE, (CONTINUOUS DUTY ²)	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	F	
MOTOR SERVICE FACTOR	1.15	
VOLTAGE - 3PH - 60Hz	460V	575V
CURRENT F.L.A.	17.5	14.9
LOCKED ROTOR CURRENT (LRA)	118	92
POWER CABLE: GAGE-LENGTH	AWG 10/4, 50' (15m) SOOW	
SENSOR CABLE: ¹ GAGE-LENGTH	AWG 14/4, 50' (15m) SOOW	
MOTOR PROTECTION	TWO NORMALLY CLOSED THERMOSTATS	
SEAL LEAK DETECTOR ¹	SINGLE ELECTRODE LEAKAGE DETECTOR	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	

1 - Requires seal fail and thermal circuit in control panel for warranty validity.

2 - Continuous duty motor - see minimum submersion depth above.

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® XP-SK110C

Dwg:




DS-C38-014

Rev:

1

Date:

6/20/2025

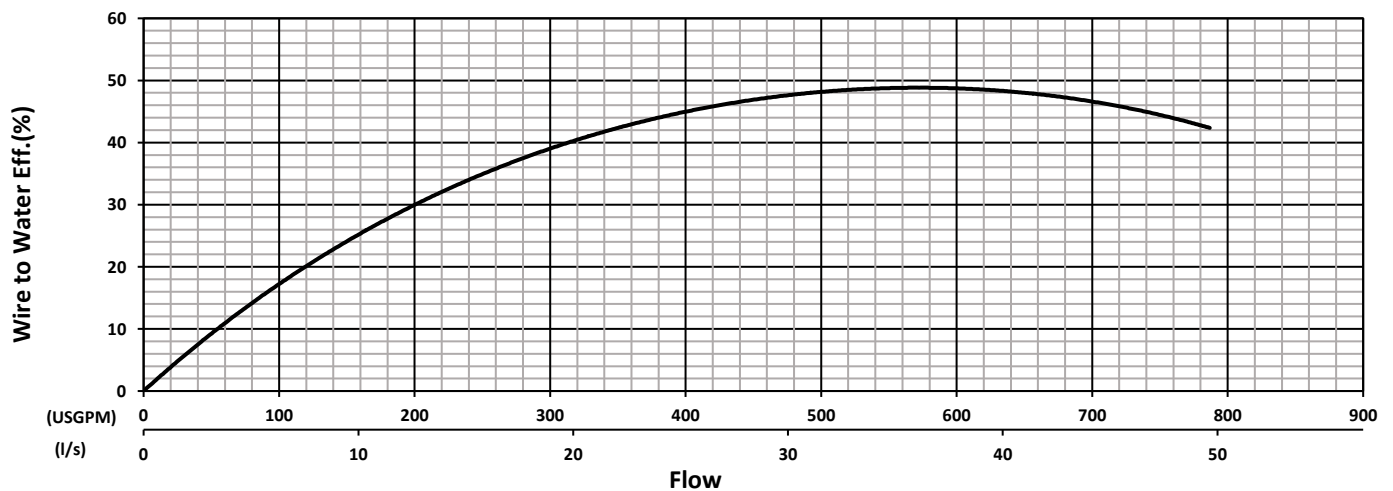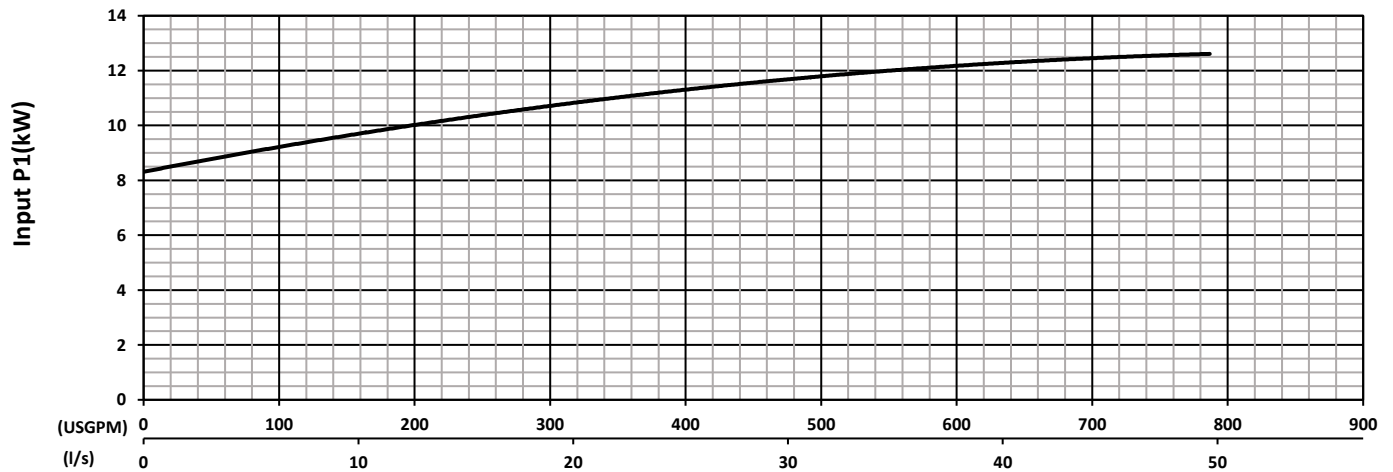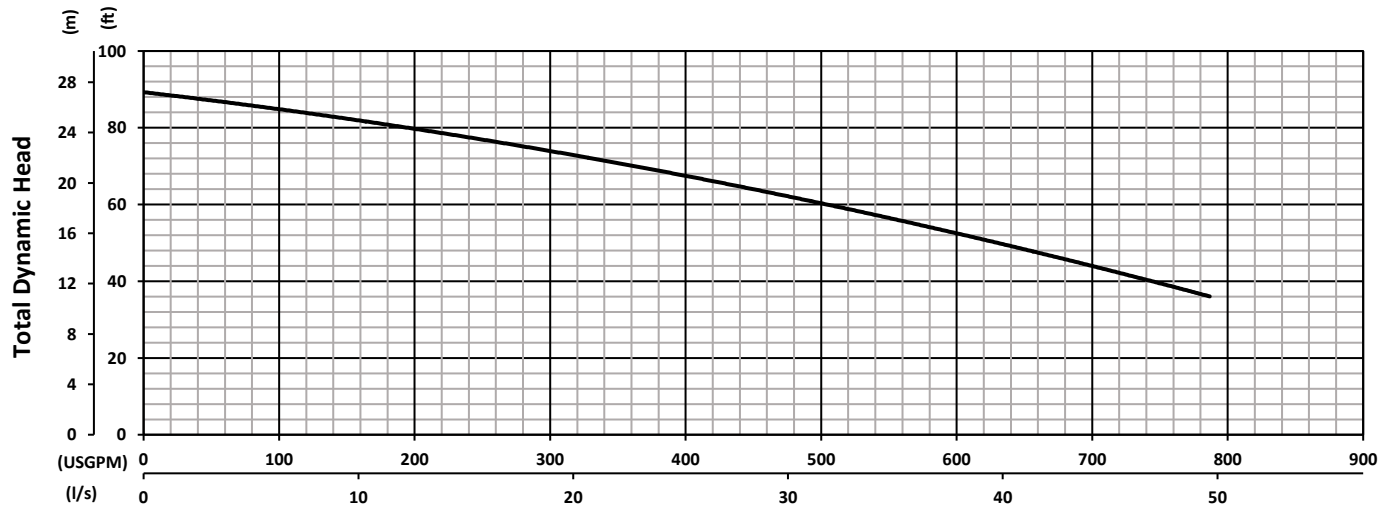

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

110C - Dual Units

Frequency 60 Hz
Pump Speed 1750 RPM
Impeller 255mm

Specifications subject to change without notice