

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps® KZN-HYD4R		
	Dwg:	DS-C68-016	Rev:	1	Date:	9/3/2025

GENERAL DATA

MAX. FLOW:	561 GPM (2123.6 L/min)
MAX. HEAD:	73' (22.2m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of hydraulic hose, Consult factory for deeper depths
PUMP TYPE	HYDRAULIC DRIVE SLURRY HANDLING TOP DISCHARGE
PUMP DOWN WATER LEVEL:	12" (305 mm)
SOLID SIZE:	1" (25.4 mm)
STRAINER OPENING:	1.38" (34.9 mm)
IMPELLER DIAMETER:	8.98" (228 mm)
DISCHARGE SIZE	4" NPT-MALE
HEIGHT	31" (787 mm)
DIAMETER (AT WIDEST POINT)	16.25" (413 mm)
SHIPPING WEIGHT:	249 lbs (113 kg)

CONSTRUCTION / MATERIAL DATA

DUAL MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	COATED DUCTILE IRON (1180 DPH)
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	HI-CHROME
STRAINER/STAND	STEEL
LIP SEAL & O-RINGS	BUNA-N
ROTOR SHAFT	410 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: PERM. LUBE. UPPER	6306
BALL BEARING: PERM. LUBE. LOWER	6308

HYDRAULIC DATA

HOSE PORTS	1/2" and 3/4" NPT-FEMALE
HYDRAULIC OIL	AW 46 HYDRAULIC OIL
INPUT FLOW ¹	MAX. 15.6 GPM (59.1 LPM)
OPERATING PRESSURE ¹	MAX. 2100 PSI (144.8 BAR)
POWER SOURCE	ANY OPEN CENTER HYDRAULIC SYSTEM

¹ - Variable speed hydraulic motor drive

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



INDUSTRIAL
FLOW
SOLUTIONS™

Performance Curve

BJM Pumps® KZN-HYD4R

Dwg:


DS-C68-010

Rev:

1

Date:

9/2/2025

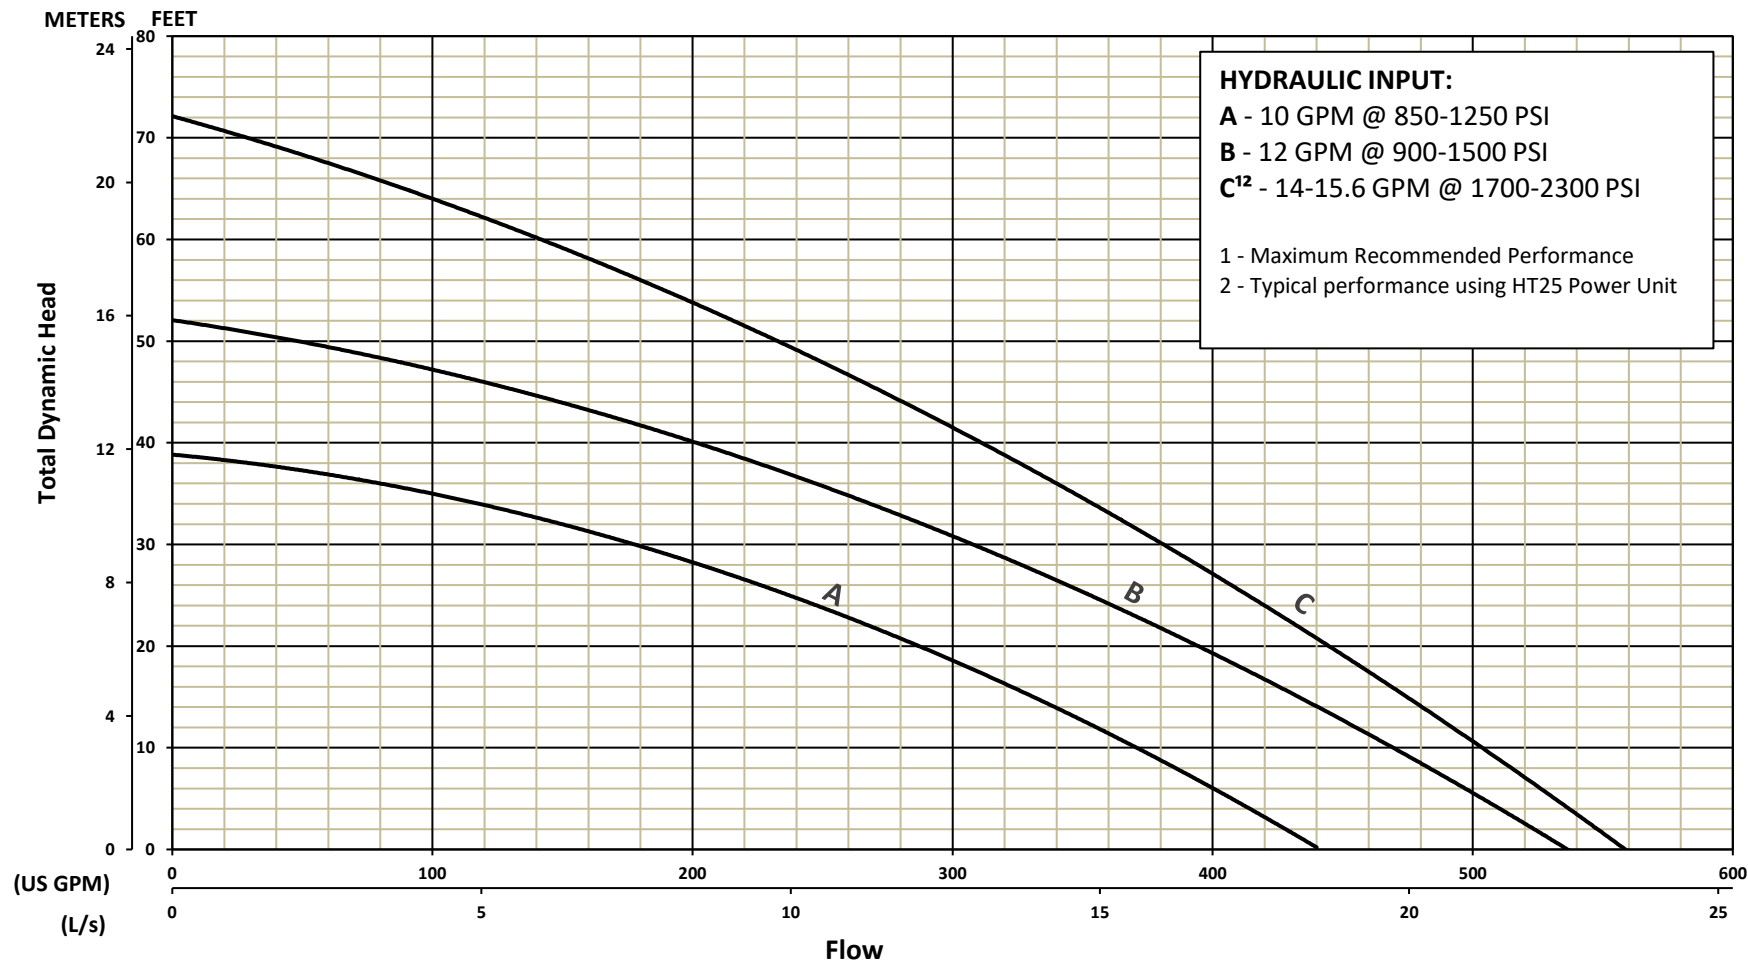

Curves are based on pumping water at 60 deg. F.

KZN-HYD4R - DUAL UNITS

Impeller 228 mm

Specifications subject to change without notice