



INDUSTRIAL  
FLOW  
SOLUTIONS™

## TECHNICAL DATA

**BJM Pumps®**  
**KZE 930**

**Dwg:**

DS-C13-009

**Rev:**

1

**Date:**

9/19/2024

## GENERAL DATA

MAX. FLOW:	2641 GPM (9997 L/min)
MAX. HEAD:	203' (61.9m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE:	SLURRY HANDLING
MINIMUM SUBMERSION DEPTH:	4.59' (55 in)
SOLID SIZE:	1.3" (33 mm)
STRAINER OPENING:	1.3" (33 mm)
DISCHARGE SIZE	8" ANSI #150
PUMP WEIGHT, with cables:	1858 lbs (843 kg)
SHIPPING WEIGHT, Estimated:	2161 lbs (980 kg)

## CONSTRUCTION / MATERIAL DATA

DUAL MECHANICAL SEALS	SILICON CARBIDE/SILICON CARBIDE, BUNA-N ELASTOMERS
MOTOR HOUSING	CAST IRON, A48 - # 35
PUMP VOLUTE	HI-CHROME
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	HI-CHROME
STRAINER / STAND	MILD STEEL
LIP SEALS & O-RINGS	BUNA-N
ROTOR SHAFT	403 SS
EXTERNAL HARDWARE	304 SS
UPPER BEARING	ROLLER BEARING, NU309
LOWER BEARING	ANGULAR CONTACT BALL BEARING, 7316 BDB x 2


## ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 125 (CONTINUOUS DUTY)	
MOTOR RPM	1800	
MOTOR INSULATION CLASS	H	
MOTOR SERVICE FACTOR	1.15	
VOLTAGE - 3 PH, 60 Hz	460	575
CURRENT F.L.A.	137	111
LOCKED ROTOR CURRENT (LRA)	1245	1009
MOTOR PROTECTION	TWO THERMAL SENSOR SWITCHES EMBEDDED IN MOTOR WINDINGS, 300°F (149°C).	
POWER CORD: GAGE; LENGTH	A.W.G. # 2; 50' (15.2m), GGC	
POWER CORD: GAGE; LENGTH	AWG 14/4; 50' (15.2m), SOOW	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	
SEAL LEAK DETECTOR	Seal Minder®; MOISTURE SENSING PROBE	

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA  
(860) 631-3618 • [www.flowsolutions.com](http://www.flowsolutions.com)

**MODEL: KZE930**

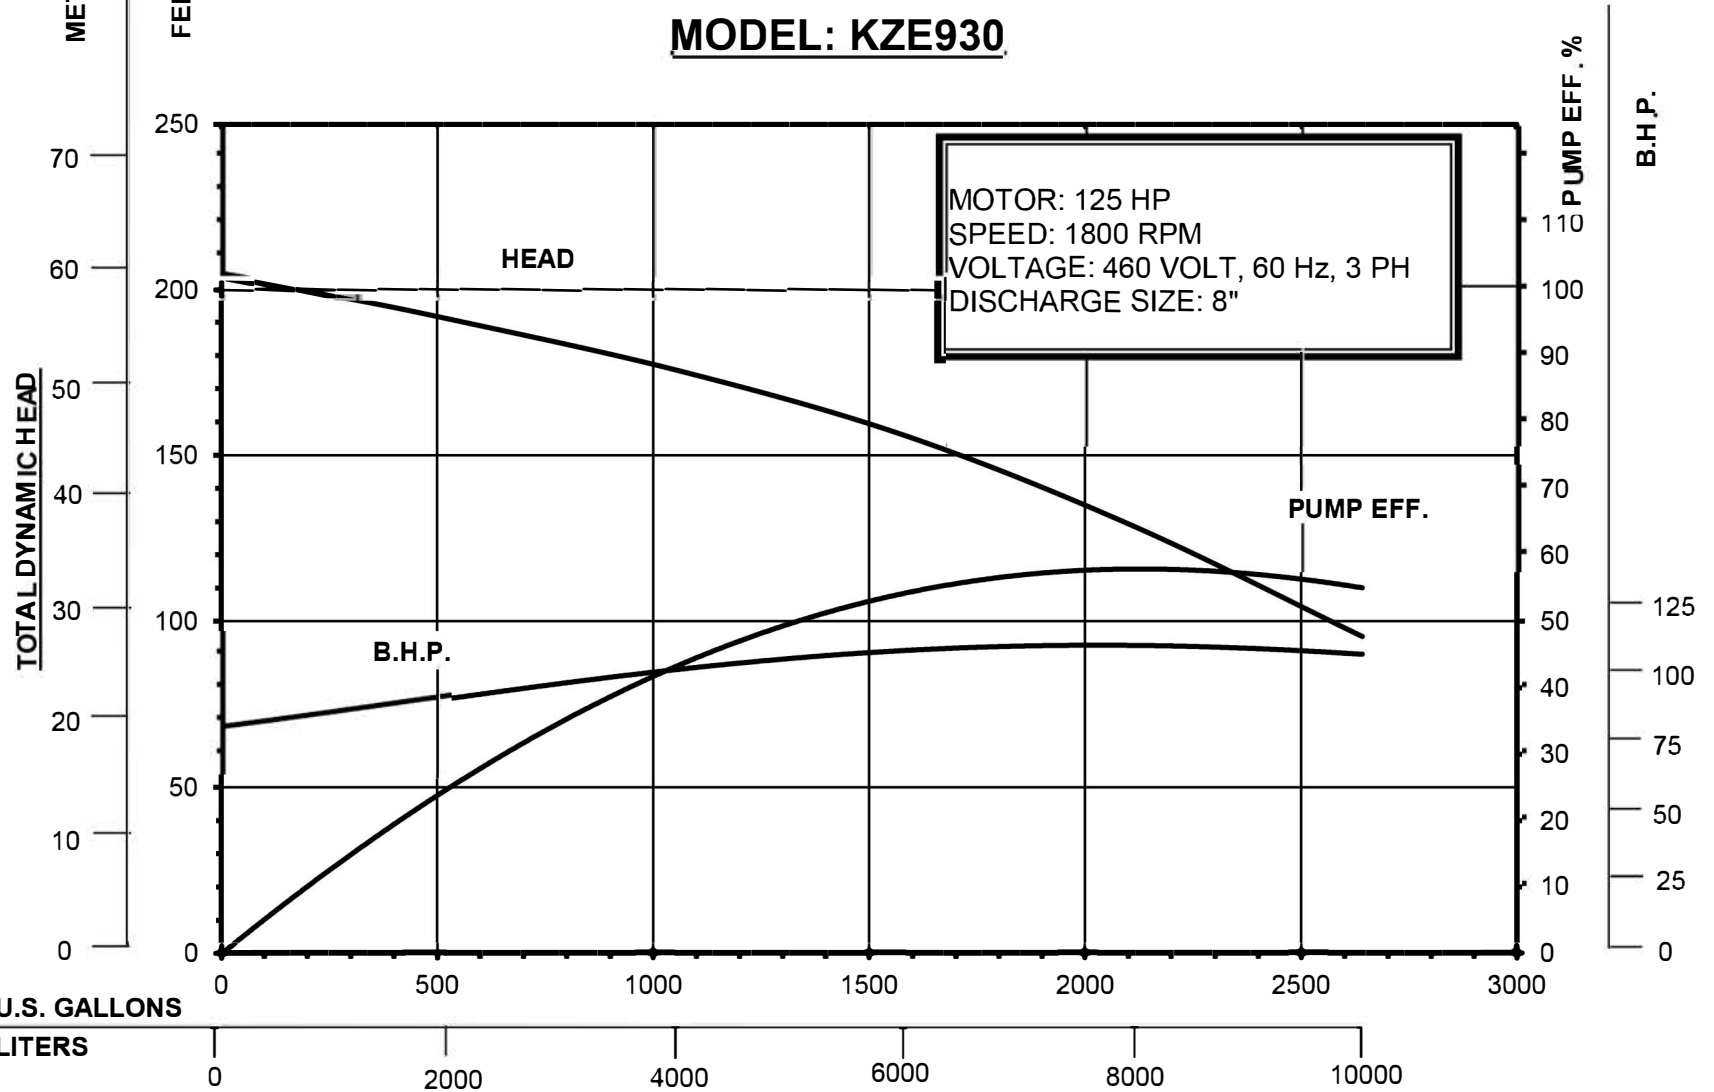

3/30/2020

**FLOW RATE PER MINUTE**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE