



INDUSTRIAL  
FLOW  
SOLUTIONS™

## TECHNICAL DATA

**BJM Pumps® KZN110H**

**Dwg:**

DS-C15-009

**Rev:**

4

**Date:**

7/1/2026

### GENERAL DATA

MAX. FLOW:	806 GPM (3051 L/min)
MAX. HEAD:	79' (24m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SLURRY HANDLING TOP DISCHARGE
MINIMUM SUBMERSION DEPTH: FOR CONT. DUTY <sup>3</sup>	43.31" (1100 mm)
PUMP DOWN WATER LEVEL:	16" (406 mm)
SOLID SIZE:	1.38" (34.9 mm)
STRAINER OPENING:	1.38" (34.9 mm)
IMPELLER DIAMETER:	11.3" (287 mm)
DISCHARGE SIZE	4" NPT-MALE (4" HOSE BARB OPTIONAL)
PUMP WEIGHT (without cable):	577 lbs (261.8 kg)
SHIPPING WEIGHT:	681 lbs (309.1 kg)

### CONSTRUCTION / MATERIAL DATA

DUAL MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	HI-CHROME
STRAINER/STAND	STEEL
LIP SEAL & O-RINGS	BUNA-N
ROTOR SHAFT	410 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: PERM. LUBE. UPPER	6306
BALL BEARING: PERM. LUBE. LOWER	6310

### ELECTRICAL / MOTOR DATA

MOTOR: HP, TYPE, RATING	15, SUBMERSIBLE , (CONTINUOUS DUTY <sup>3</sup> )	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	H	
MOTOR SERVICE FACTOR	1.2	
VOLTAGE - 60Hz <sup>1</sup>	460V	575V
CURRENT F.L.A.	17.5	13.7
LOCKED ROTOR CURRENT (LRA)	110	85
POWER CABLE: GAUGE-LENGTH	AWG 8/5, 50' (15m) SOOW	
SENSOR CABLE: (OPTIONAL <sup>2</sup> ) GAUGE-LENGTH	AWG 18/2, 50' (15m) SOOW	
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD	
SEAL LEAK DETECTOR (OPTIONAL <sup>2</sup> )	Seal Minder® MOISTURE SENSING PROBE	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	

1 - Available in other voltages for 50Hz

2 - Requires a seal fail circuit in control panel for warning signal

3 - Continuous duty motor - see minimum submersion depth above

©2026 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

(860) 631-3618 • [www.flowsolutions.com](http://www.flowsolutions.com)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



INDUSTRIAL FLOW SOLUTIONS™

# PERFORMANCE CURVE

## BJM Pumps® KZN110H

Dwg:




DS-C15-010

Rev:

4

Date:

7/1/2026

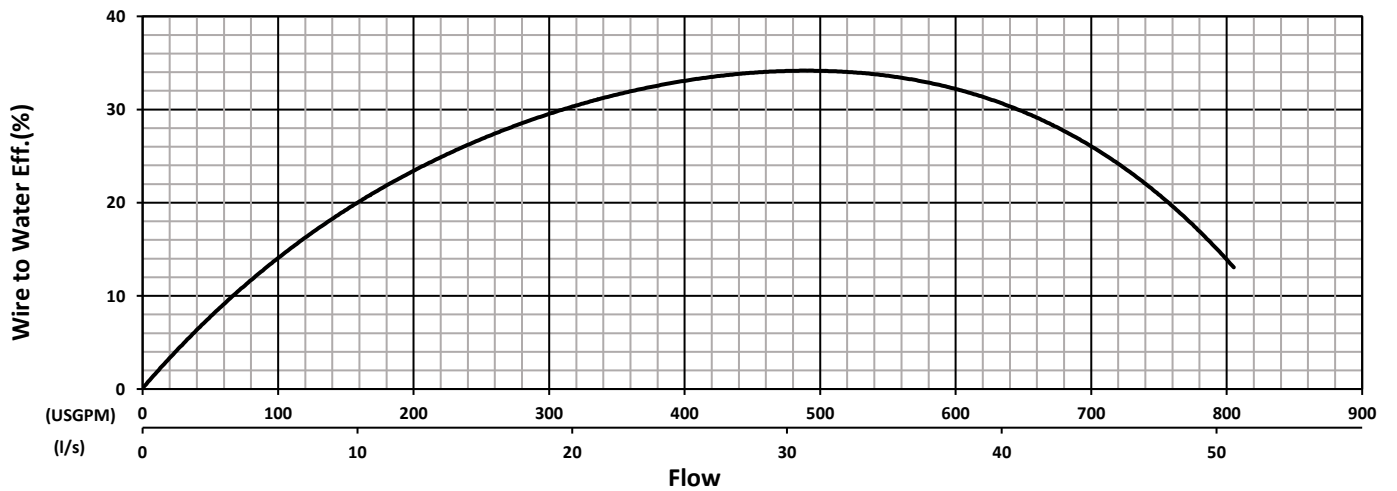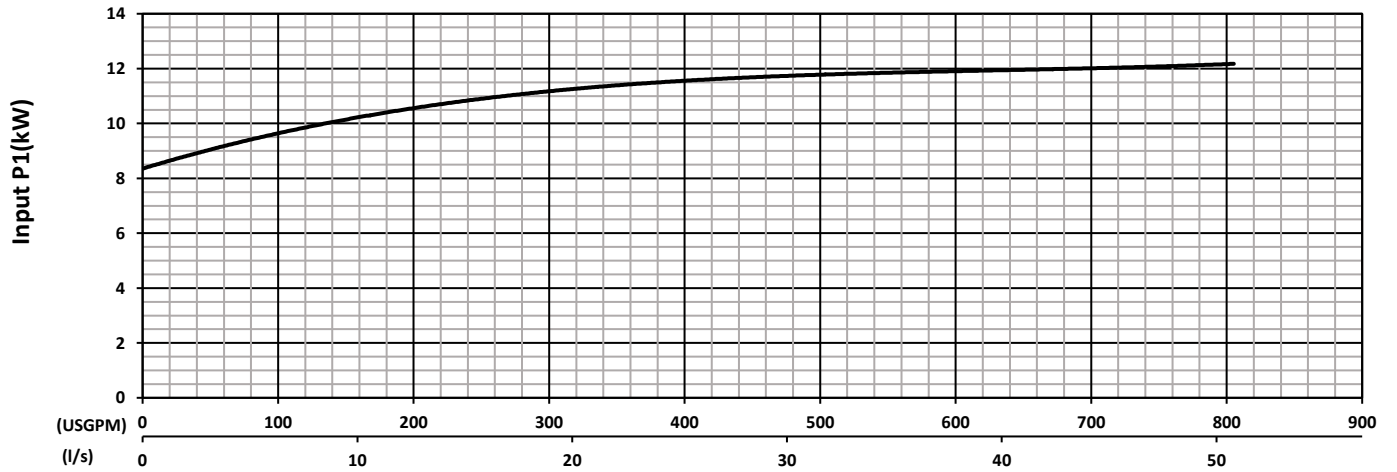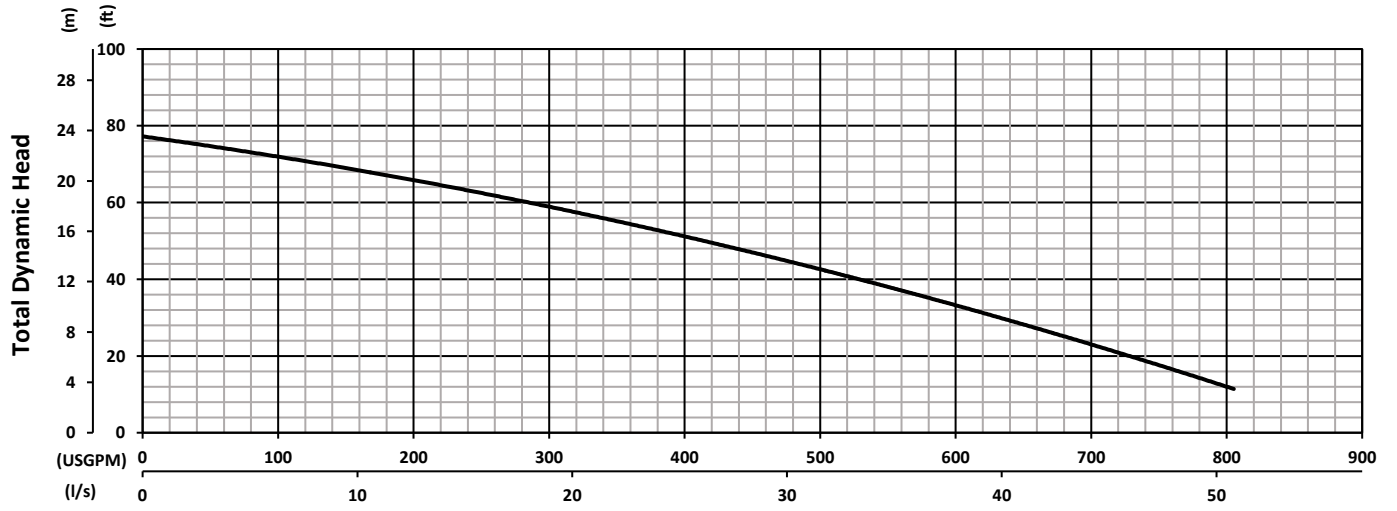

Test Standard : HI 11.6 Gr 3B  
Tested with water at 20°C

110H - Dual Units

Frequency	60 Hz
Pump Speed	1750 RPM
Impeller	287mm

Specifications subject to change without notice