

**TECHNICAL DATA**  
**MODEL KZN75RF**  
**HI-HARD SEVERE DUTY SLURRY PUMP – CHROME IRON / HI HARD VOLUTE**  
**For High Temperature Service**

**GENERAL DATA**

|                                      |  |
|--------------------------------------|--|
| MAX. FLOW: GPM (L/min)               | 655 GPM (2480 L/min)   |
| MAX. HEAD: ft (m)                    | 61' (18.6 m)   |
| MAX. SUBMERSION DEPTH: ft (m)        | 65' (20m) or limited to length of power cord,<br>Consult factory for deeper depths |
| PUMP TYPE                            | SLURRY HANDLING, HIGH TEMPERATURE  |
| SOLID SIZE: in (mm)                  | 1" (25.4 mm)   |
| STRAINER OPENING: in (mm)            | 1.375" (34.9 mm)   |
| IMPELLER DIAMETER: in (mm)           | 8.97" (228 mm)   |
| DISCHARGE SIZE                       | 4" NPT-MALE (3" NPT-MALE OPTIONAL)   |
| PUMP WEIGHT, without cable: lbs (kg) | 349 lbs (158.6 kg)   |
| SHIPPING WEIGHT: lbs (kg)            | 402 lbs. (182.7 kg)  |

**CONSTRUCTION/MATERIAL DATA**

|                                    |   |
|------------------------------------|---|
| DUAL MECHANICAL SEALS              | SILICON CARBIDE/SILICON CARBIDE - FKM                             |
| MOTOR HOUSING                      | CAST IRON   |
| PUMP VOLUTE                        | DUCTILE IRON WITH INTERIOR HARDNESS<br>COATING TO 1180 DPH(Rc 71) |
| WEAR PLATE                         | HI-CHROME   |
| AGITATOR                           | HI-CHROME   |
| IMPELLER                           | MULTI VANE, HI-CHROME   |
| STRAINER/STAND                     | STEEL   |
| LIP SEALS & O-RINGS                | FKM   |
| ROTOR SHAFT                        | 410 SS  |
| EXTERNAL HARDWARE                  | 304 SS  |
| QTY. OIL IN MOTOR STATOR           | OIL-FILLED W/ FM 32, NSF APPROVED                                 |
| QTY. OIL IN SEAL CHAMBER           | 49 U.S. FL. OZ. (1450 C.C.), FM 32, NSF APPROVED                  |
| BALL BEARING: OIL LUBRICATED UPPER | 6306  |
| BALL BEARING: OIL LUBRICATED LOWER | 6308  |

**ELECTRICAL /MOTOR DATA**

|                                 |  |             |
|---------------------------------|--|-------------|
| MOTOR: TYPE, RATING HP          | Submersible, Oil-Filled , Continuous Duty, 10                            |             |
| MOTOR RPM                       | 1750   |             |
| MOTOR INSULATION CLASS          | R, 428°F (220°C)   |             |
| MOTOR SERVICE FACTOR            | 1.15   |             |
| VOLTAGE - 3 PH, 60 Hz           | 460V   | 575V option |
| CURRENT F.L.A.                  | 13   | 10.5        |
| LOCKED ROTOR CURRENT (LRA)      | 77   | 55          |
| MOTOR PROTECTION                | THERMAL SENSOR SWITCHES EMBEDDED IN<br>EACH WINDING PHASE, 300°F (149°C) |             |
| POWER CORD: GAGE; LENGTH        | A.W.G. 10/4; 50' (15.2m), HIGH TEMP. RATED CORD                          |             |
| SENSOR CABLE: GAGE; LENGTH      | A.W.G. 18/4; 50' (15.2m), HIGH TEMP. RATED CABLE                         |             |
| MAXIMUM LIQUID TEMPERATURE      | 200°F (93°C)   |             |
| SEAL LEAK DETECTOR <sup>1</sup> | Seal Minder®; MOISTURE SENSING PROBE                                     |             |

1- Requires a seal fail circuit in control panel for warning signal.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.


104 John W Murphy Drive  
 New Haven, CT. 06513, USA  
 Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Seal Minder® is a registered trademark of Industrial Flow Solution Operating, LLC. All rights reserved.



# MODEL: KZN75RF

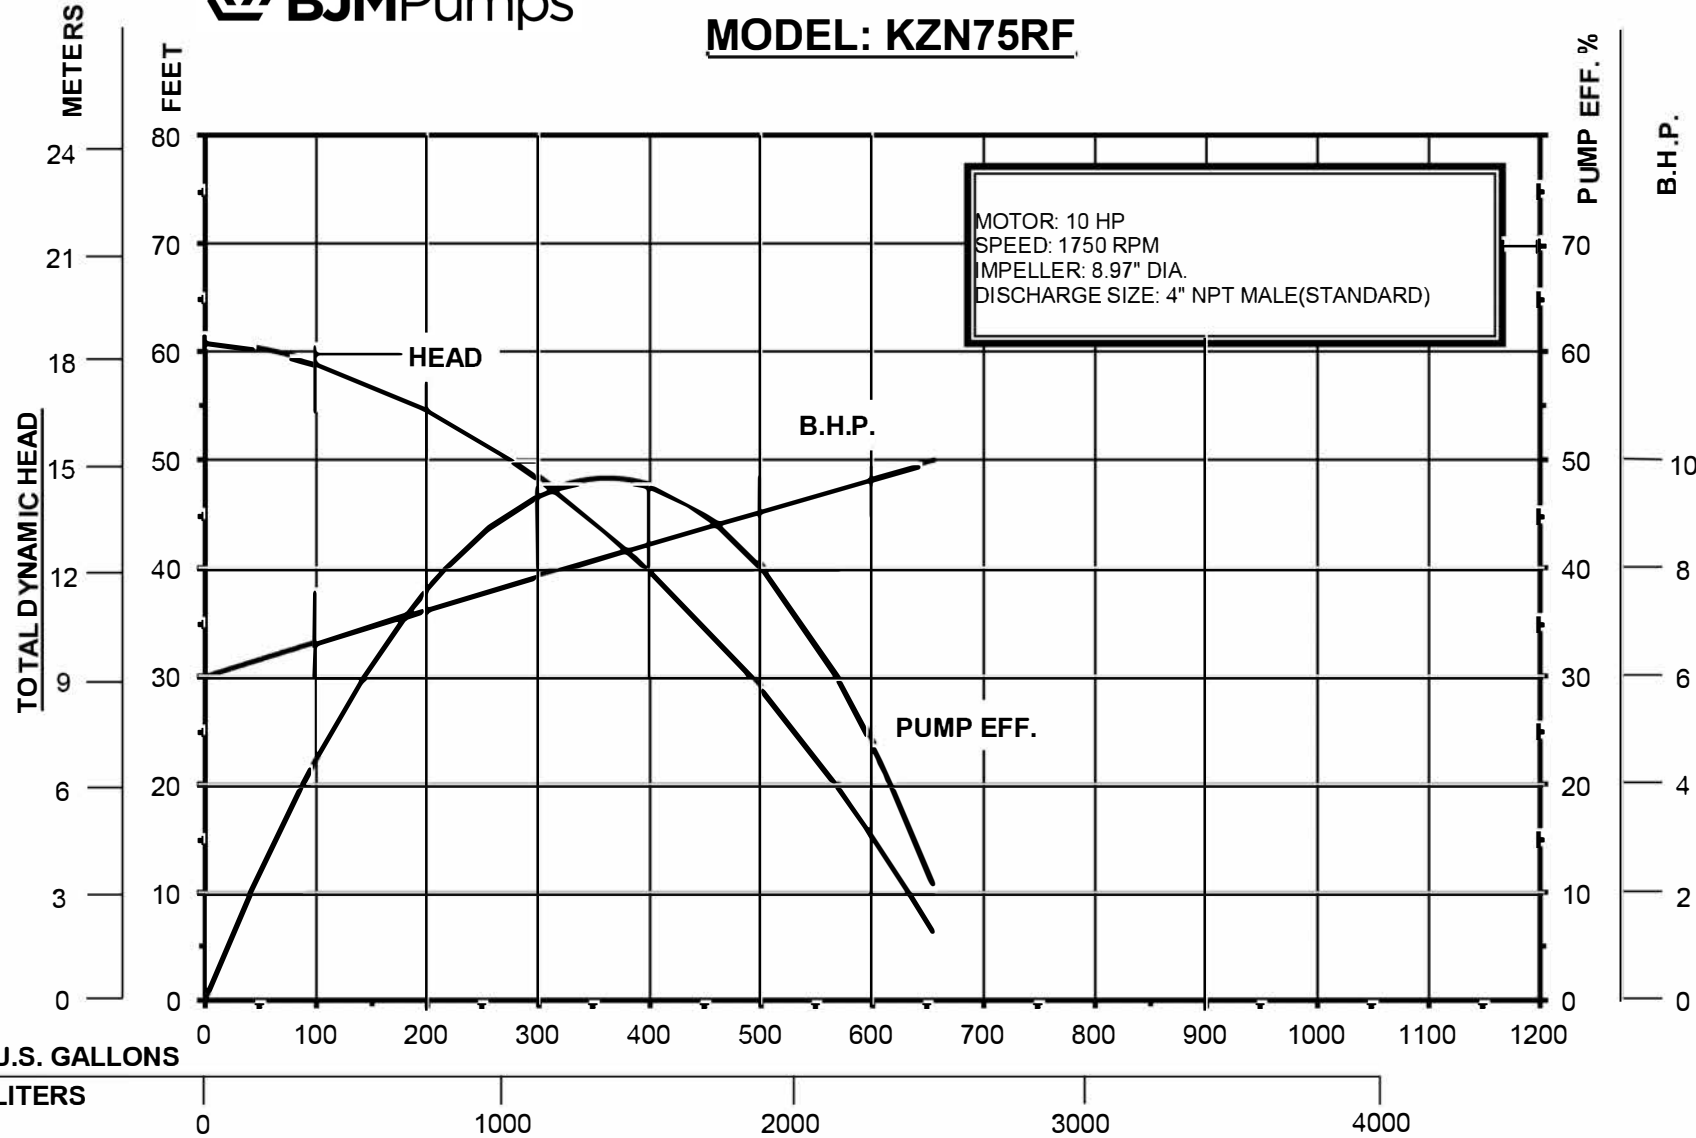

3/30/2020

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE