

INDUSTRIAL
FLOW
SOLUTIONS™**TECHNICAL DATA****BJM Pumps® SK08C****Dwg:**

DS-C25-003

Rev:

2

Date:

11/11/2024

GENERAL DATA

MAX. FLOW:	88 GPM (333.1 L/min)
MAX. HEAD:	50' (15.2m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON CLOG SHREDDER
MINIMUM SUBMERSION DEPTH:	11.03" (280 mm)
SOLID SIZE:	2" (50 mm)
IMPELLER DIAMETER:	4.34" (110 mm)
DISCHARGE SIZE	2" NPT-MALE
SLIDE RAIL SYSTEM	2"
PUMP WEIGHT, without cable:	58 lbs (26.4 kg)
SHIPPING WEIGHT:	68 lbs (31 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR CASING	304 SS
PUMP VOLUTE	CAST IRON
IMPELLER	HIGH CHROME
IMPELLER SHREDDER BLADE	TUNGSTEN CARBIDE
LIP SEAL & O-RINGS	BUNA-N
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN SEAL CHAMBER	7.8 US FL OZ. (230 CC)
BALL BEARING: PERM. LUBE. UPPER	6203
BALL BEARING: PERM. LUBE. LOWER	6304

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 1 (CONTINUOUS DUTY ²)			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE ¹ - 60 Hz	208V	230V	460V	575V
CURRENT F.L.A.	3.15	3	1.5	1.2
LOCKED ROTOR CURRENT (LRA)	18.15	18	9	8
POWER CABLE: GAGE; LENGTH	AWG 16/4, 33' (10m), STOW			
SENSOR CABLE: GAGE; LENGTH	AWG 18/2, 33' (10m), SJTOW			
MOTOR PROTECTION	THERMAL & AMP OVERLOAD			
SEAL LEAK DETECTOR ³	Seal Minder® MOISTURE SENSING PROBE			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® SK08

Dwg:




DS-C25-013

Rev:

1

Date:

11/11/2024

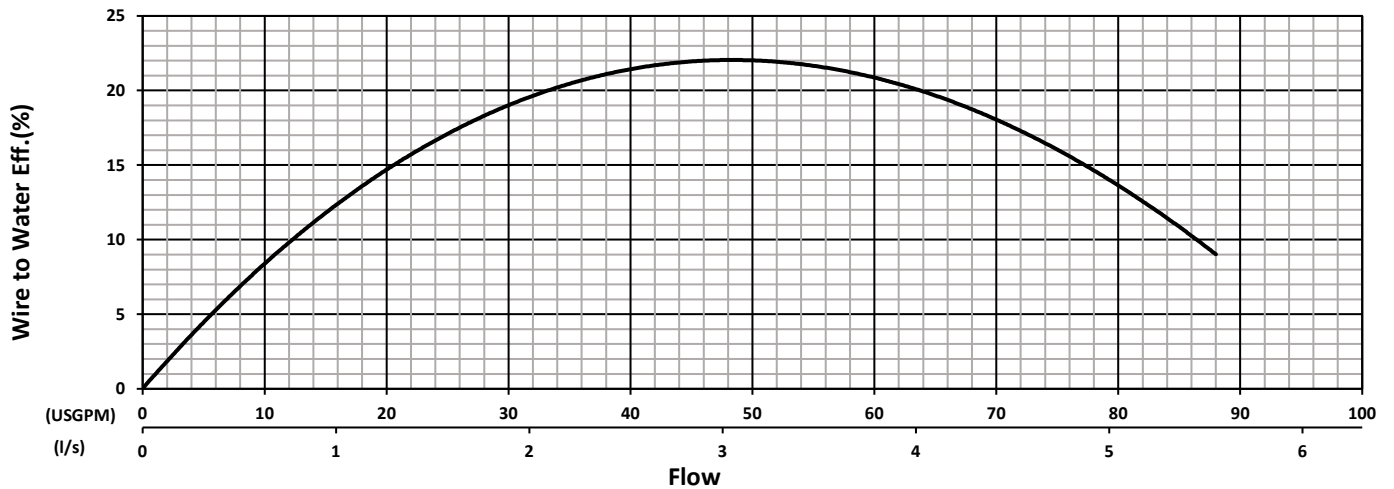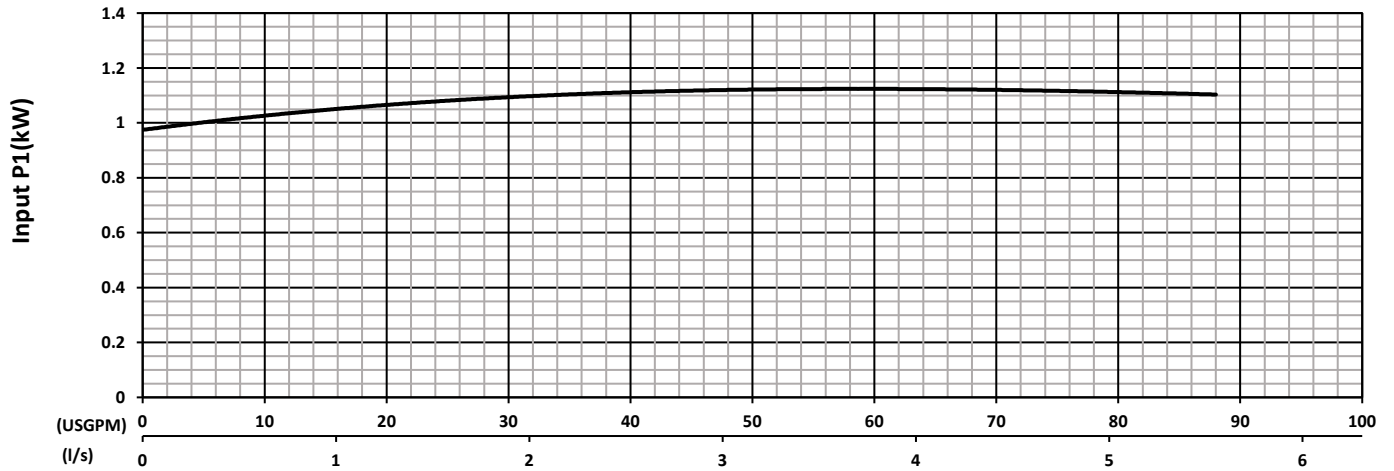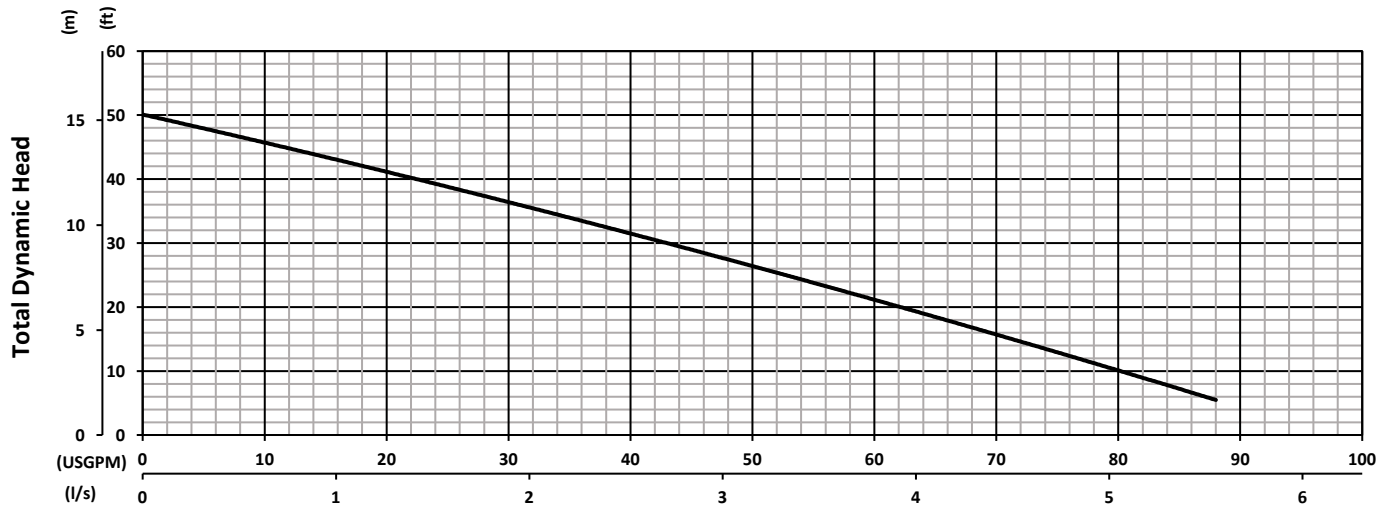

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

08 - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller 110mm

Specifications subject to change without notice