

TECHNICAL DATA
MODEL SK22CF
BJM Pumps® SHREDDER PUMP-CAST IRON, 2 VANE IMPELLER
For High Temperature Service

GENERAL DATA

MAX. FLOW: GPM (L/min)	270 GPM (1037 L/min)
MAX. HEAD: ft (m)	45' @ 70 GPM (13.7 m @ 269 L/min)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON CLOG SHREDDER, HIGH TEMPERATURE
SOLID SIZE: in (mm)	1.6" (40.6 mm)
IMPELLER DIAMETER: in (mm)	4.45" (113 mm)
DISCHARGE SIZE	3" NPT-MALE
SLIDE RAIL DISCHARGE SIZE	3"
PUMP WEIGHT, without cable: lbs (kg)	107 lbs (48.6 kg)
SHIPPING WEIGHT: lbs (kg)	130 lbs (59 kg)

CONSTRUCTION/MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/ SILICON CARBIDE - FKM
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE - FKM
MOTOR HOUSING	304 SS
PUMP VOLUTE	CAST IRON
IMPELLER	TWO VANE, HEAT TREATED DUCTILE IRON
IMPELLER SHREDDER BLADE	TUNGSTEN CARBIDE
STAND	CAST IRON
SUCTION COVER	HEAT TREATED DUCTILE IRON
LIPSEAL & O-RINGS	FKM
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN MOTOR STATOR	OIL-FILLED W/ ISO 32, NSF FOOD GRADE MINERAL OIL
QTY. OIL IN SEAL CHAMBER	11.8 U.S. FL. OZ. (350 C.C.), ISO 32, NSF FOOD GRADE MINERAL OIL
BALL BEARING: OIL LUBRICATED UPPER	6304
BALL BEARING: OIL LUBRICATED LOWER	6305

ELECTRICAL /MOTOR DATA

MOTOR: TYPE, RATING HP	Submersible, Oil-Filled , Continuous Duty, 3			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	R, 428°F (220°C)			
MOTOR SERVICE FACTOR	1.15			
VOLTAGE - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	9.45	9	4.5	3.2
LOCKED ROTOR CURRENT (LRA)	57	56	28	22
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)			
POWER CORD: GAGE; LENGTH	A.W.G. 10/4; 33' (10m), HIGH TEMP. RATED CORD			
SENSOR CABLE ¹ : GAGE; LENGTH	A.W.G. 18/4; 33' (10 m), HIGH TEMP. RATED CABLE			
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)			
SEAL LEAK DETECTOR	Seal Minder®; MOISTURE SENSING PROBE			


1- Seal minder & thermal sensor cable must be properly connected to a control panel to maintain warranty

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive
 New Haven, CT. 0613, USA

Tel: (860)399-5937 - Fax: (860)399-7784

MODEL: SK22CF 2 VANE IMPELLER

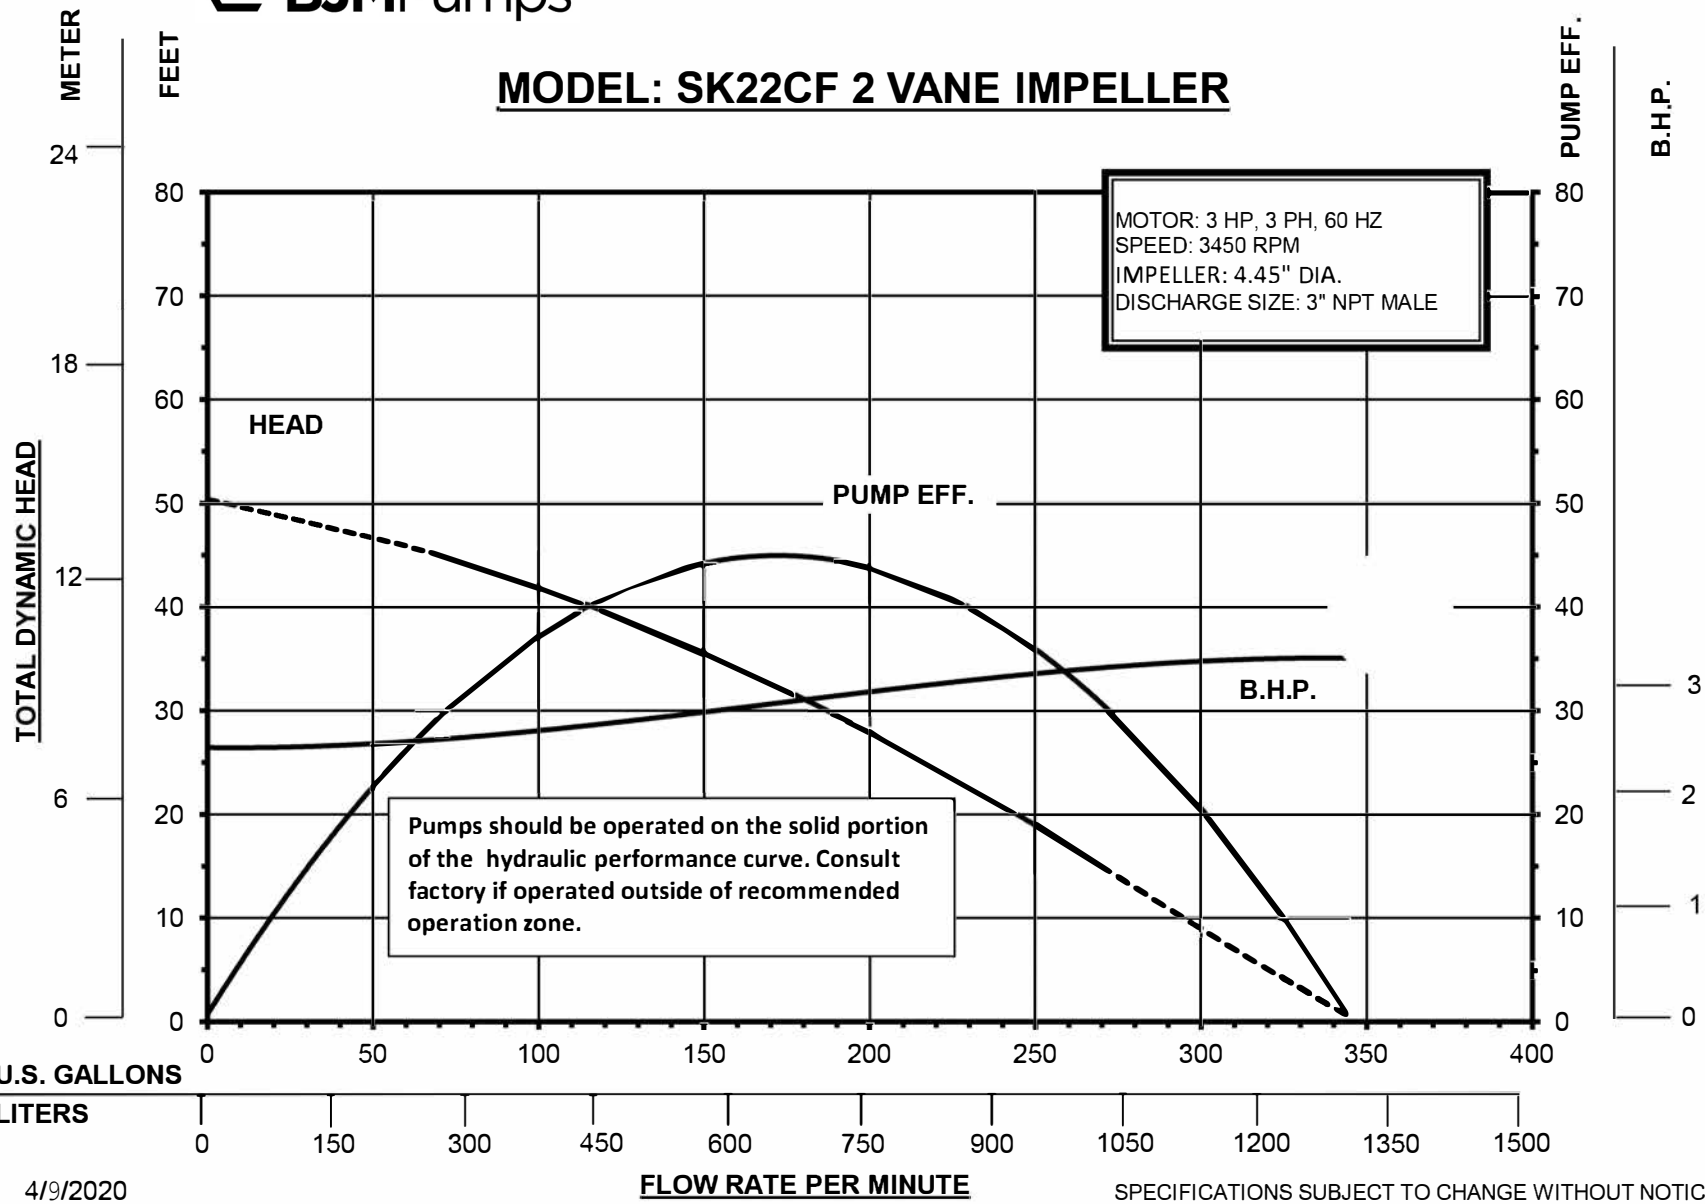

4/9/2020

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE