

TECHNICAL DATA
MODEL SK75C-F
BJM Pumps® SHREDDER PUMP-CAST IRON, 2 VANE IMPELLER
For High Temperature Service
GENERAL DATA

MAX. FLOW: GPM (L/min)	670 GPM (2536 L/min)
MAX. HEAD: ft (m)	64' (19.4 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON CLOG SHREDDER
SOLID SIZE: in (mm)	3.5" (89 mm)
IMPELLER DIAMETER: in (mm)	7.88" (200 mm)
DISCHARGE SIZE	4" NPT-FEMALE
SLIDE RAIL DISCHARGE SIZE	4"
PUMP WEIGHT, without cable: lbs (kg)	318 lbs (144.6 kg)
SHIPPING WEIGHT: lbs (kg)	395 lbs (179.5 kg)

CONSTRUCTION/MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/ SILICON CARBIDE - FKM
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE – FKM
MOTOR HOUSING	304 SS
PUMP VOLUTE	CAST IRON
IMPELLER	TWO VANE, HEAT TREATED DUCTILE IRON
IMPELLER SHREDDER BLADE	TUNGSTEN CARBIDE
SUCTION COVER	HEAT TREATED DUCTILE IRON
STAND	CAST IRON
LIPSEAL & O-RINGS	FKM
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN MOTOR STATOR	OIL-FILLED W/ ISO 32, NSF FOOD GRADE MINERAL OIL
QTY. OIL IN SEAL CHAMBER	84.5 US FL. OZ. (2500 C.C.), ISO 32, NSF FOOD GRADE MINERAL OIL
BALL BEARING: OIL LUBRICATED UPPER	6306
BALL BEARING: OIL LUBRICATED LOWER	6309

ELECTRICAL /MOTOR DATA

MOTOR: TYPE, RATING HP	Submersible, Oil-Filled , Continuous Duty, 10	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	R, 428°F (220°C)	
MOTOR SERVICE FACTOR	1.1	
VOLTAGE - 3 PH, 60 Hz	460V	575V option
CURRENT F.L.A.	15	10.5
LOCKED ROTOR CURRENT (LRA)	77	55
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)	
POWER CORD: GAGE; LENGTH	A.W.G. 10/4; 33' (10m), HIGH TEMP. RATED CORD	
SENSOR CABLE ¹ : GAGE; LENGTH	A.W.G. 18/4; 33' (10 m), HIGH TEMP. RATED CABLE	
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)	
SEAL LEAK DETECTOR	Seal Minder®; MOISTURE SENSING PROBE	

1- Seal minder & thermal sensor cable must be properly connected to a control panel to maintain warranty


©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive

New Haven, CT. 0613, USA

Tel: (860)399-5937 - Fax: (860)399-7784

MODEL: SK75CF 2 VANE IMPELLER

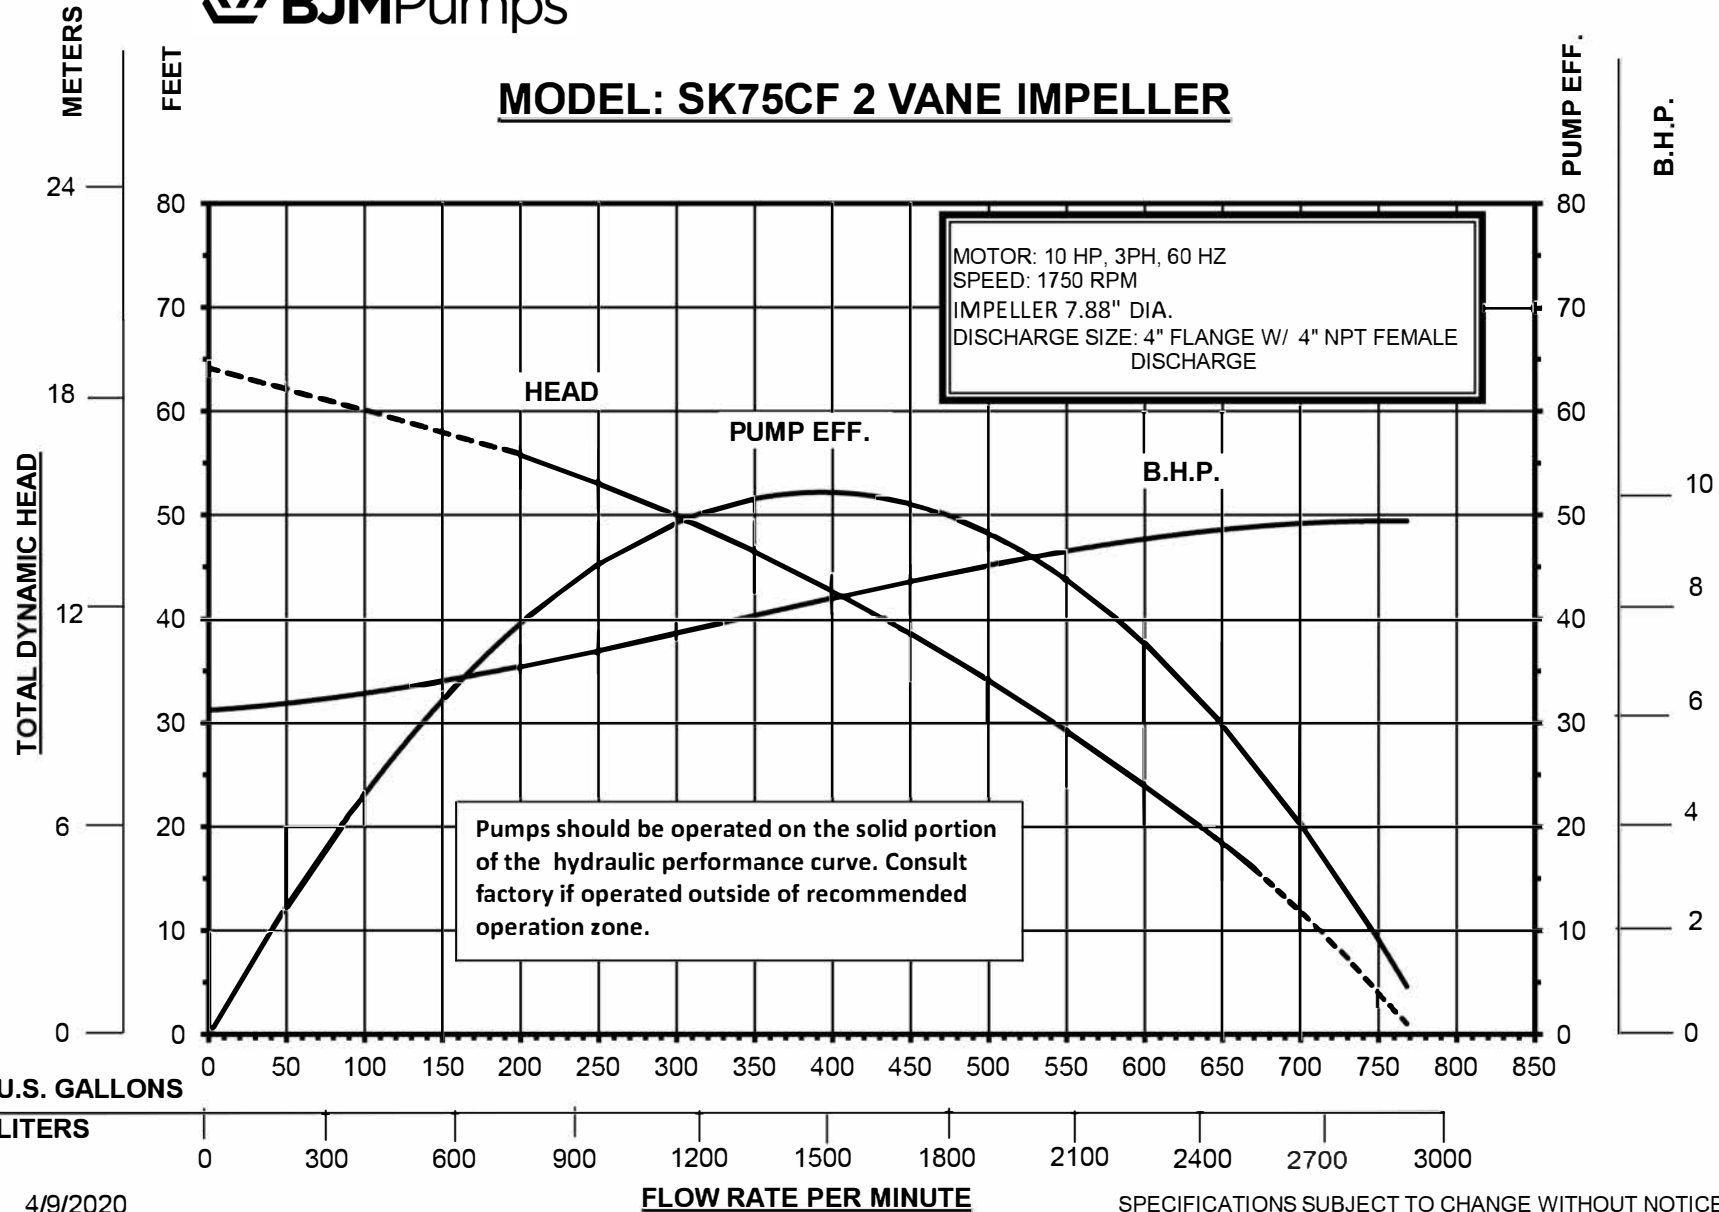

MOTOR: 10 HP, 3PH, 60 HZ
 SPEED: 1750 RPM
 IMPELLER 7.88" DIA.
 DISCHARGE SIZE: 4" FLANGE W/ 4" NPT FEMALE DISCHARGE

Pumps should be operated on the solid portion of the hydraulic performance curve. Consult factory if operated outside of recommended operation zone.