

**TECHNICAL DATA**  
**MODEL SKG22C**  
**BJM Pumps® 4 POLE SHREDDER PUMP - CAST IRON**  
**GENERAL DATA**

MAX. FLOW: GPM (L/min)	300 GPM @ 12' (1135.5 L/min @ 3.7 m)
MAX. HEAD: ft (m)	41' @ 50 GPM (12.5 m @ 189.3 L/min)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	AXIAL & RADIAL SHREDDER
IMPELLER DIAMETER: in (mm)	6.5" (165.1 mm)
DISCHARGE SIZE	3" NPT-FEMALE
PUMP WEIGHT, without cable: lbs (kg)	157 lbs (71.4 kg)
SHIPPING WEIGHT: lbs (kg)	205 lbs (93.2 kg)

**CONSTRUCTION / MATERIAL DATA**

MECHANICAL SEAL - UPPER	CARBON/ SILICON CARBIDE - FKM
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE - FKM
MOTOR HOUSING	304 SS
PUMP VOLUTE	CAST IRON
IMPELLER	DOUBLE VANE, 12% CHROME IRON
CUTTER BAR	440C SS, HEAT TREATED 58-60 Rc
AXIAL CUTTER RING	440C SS, HEAT TREATED 58-60 Rc
RADIAL CUTTER RING	440C SS, HEAT TREATED 58-60 Rc
SUCTION COVER	12% CHROME IRON
STAND	CAST IRON
LIPSEAL & O-RINGS	BUNA-N
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN SEAL CHAMBER	25.4 U.S. FL. OZ. (750 C.C.)
BALL BEARING: PERM. LUBE. UPPER	SINGLE ROW RADIAL, SEALED BALL BEARING
BALL BEARING: PERM. LUBE. LOWER	SINGLE ROW RADIAL, SEALED BALL BEARING

**ELECTRICAL / MOTOR DATA**


MOTOR: TYPE, RATING HP	SUBMERSIBLE, 3 HP (CONTINUOUS DUTY)			
MOTOR RPM	1750			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.15			
VOLTAGE - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	9.45	9	4.5	3.2
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD			
POWER CABLE: GAGE; LENGTH	A.W.G. 14/4; 33' (10m), SOOW			
SEAL MINDER CABLE: GAGE; LENGTH	A.W.G. 18/2; 33' (10m), SOOW			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			
SEAL LEAK DETECTOR <sup>1</sup>	Seal Minder®; MOISTURE SENSING PROBE			

1- Requires a seal fail circuit in control panel for warning signal.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive  
 New Haven, CT 0613, USA  
 Tel: (860) 631-3618 - Fax: (860) 399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
 Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

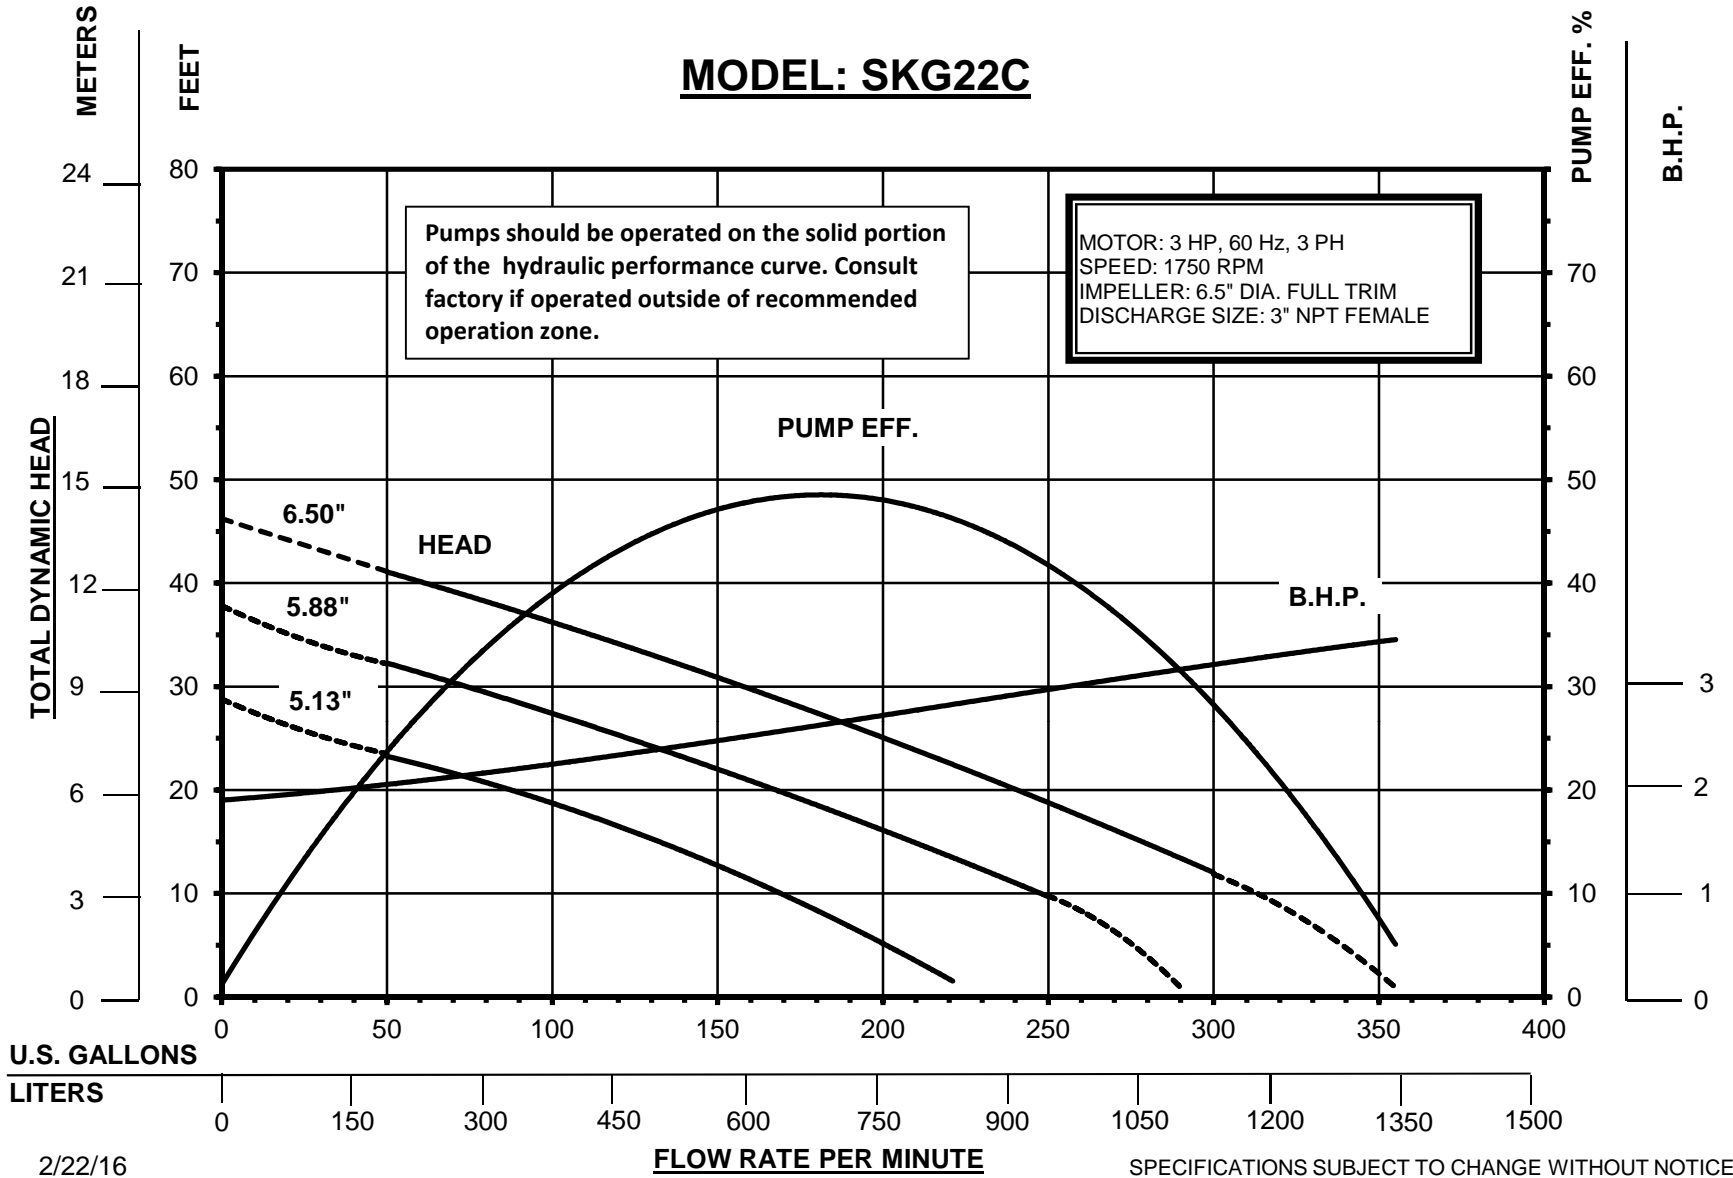

2/22/16

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE