

Visit our website: [www.flowsolutions.com](http://www.flowsolutions.com)

**TECHNICAL DATA**  
**MODEL SKX08CSS**  
**BJM SHREDDER PUMP - 316 SS**  
**GENERAL DATA**

MAX. FLOW: GPM (L/min)	95 GPM (359 L/min)
MAX. HEAD: ft (m)	48' (14.6 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON CLOG SHREDDER
MINIMUM SUBMERSION DEPTH: in(mm)	11" (280 mm)
SOLID SIZE: in (mm)	2" (50 mm)
IMPELLER DIAMETER: in (mm)	4.33" (110 mm)
DISCHARGE SIZE	2" NPT-MALE
SLIDE RAIL DISCHARGE SIZE	2"
PUMP WEIGHT, without cable: lbs (kg)	60 lbs (27.3 kg)
SHIPPING WEIGHT: lbs (kg)	69 lbs (31.4 kg)

**CONSTRUCTION / MATERIAL DATA**

MECHANICAL SEAL - UPPER	CARBON/CERAMIC
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE
MOTOR HOUSING	316 SS
PUMP VOLUTE	316 SS
IMPELLER	SINGLE VANE, 316 SS
IMPELLER SHREDDER BLADE	TUNGSTEN CARBIDE
STAND(INTEGRAL SUCTION COVER)	316 SS
LIPSEAL & O-RINGS	VITON
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	316 SS
QTY. OIL IN SEAL CHAMBER	10.1 U.S. FL. OZ. (300 C.C.)
BALL BEARING: PERM. LUBE. UPPER	6203
BALL BEARING: PERM. LUBE. LOWER	6304

**ELECTRICAL / MOTOR DATA**

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 1 (CONTINUOUS DUTY <sup>3</sup> )			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE <sup>1</sup> - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	3.15	3	1.5	1.2
LOCKED ROTOR CURRENT (LRA)	18.15	18	9	8
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD			
POWER CORD: GAGE; LENGTH	A.W.G. 16/4; 33' (10m), STOW			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			
SEAL LEAK DETECTOR <sup>2</sup>	Seal Minder®; MOISTURE SENSING PROBE			

1- Available in other voltages (and in 50 Hz).

2- Requires a seal fail circuit in control panel for warning signal.

3 - NOTE: STAINLESS STEEL PUMPS **MAY NOT BE SUITABLE** FOR CONTINUOUS DUTY IN ALL APPLICATIONS. PLEASE CONSULT WITH BJM PUMPS. MAY BE NECESSARY TO OFFER 'F' SERIES HIGH TEMPERATURE PUMPS WHEN CONSIDERING CONTINUOUS DUTY OPERATION.

©2004 - 2014 BJM Pumps, LLC. All rights reserved.

123 Spencer Plain Road


Old Saybrook, CT. 06475, USA

(860)399-5937 - (877) BJM-PUMP - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Seal Minder is a registered trademark of BJM Pumps, LLC. All rights reserved.

### MODEL: SKX08CSS

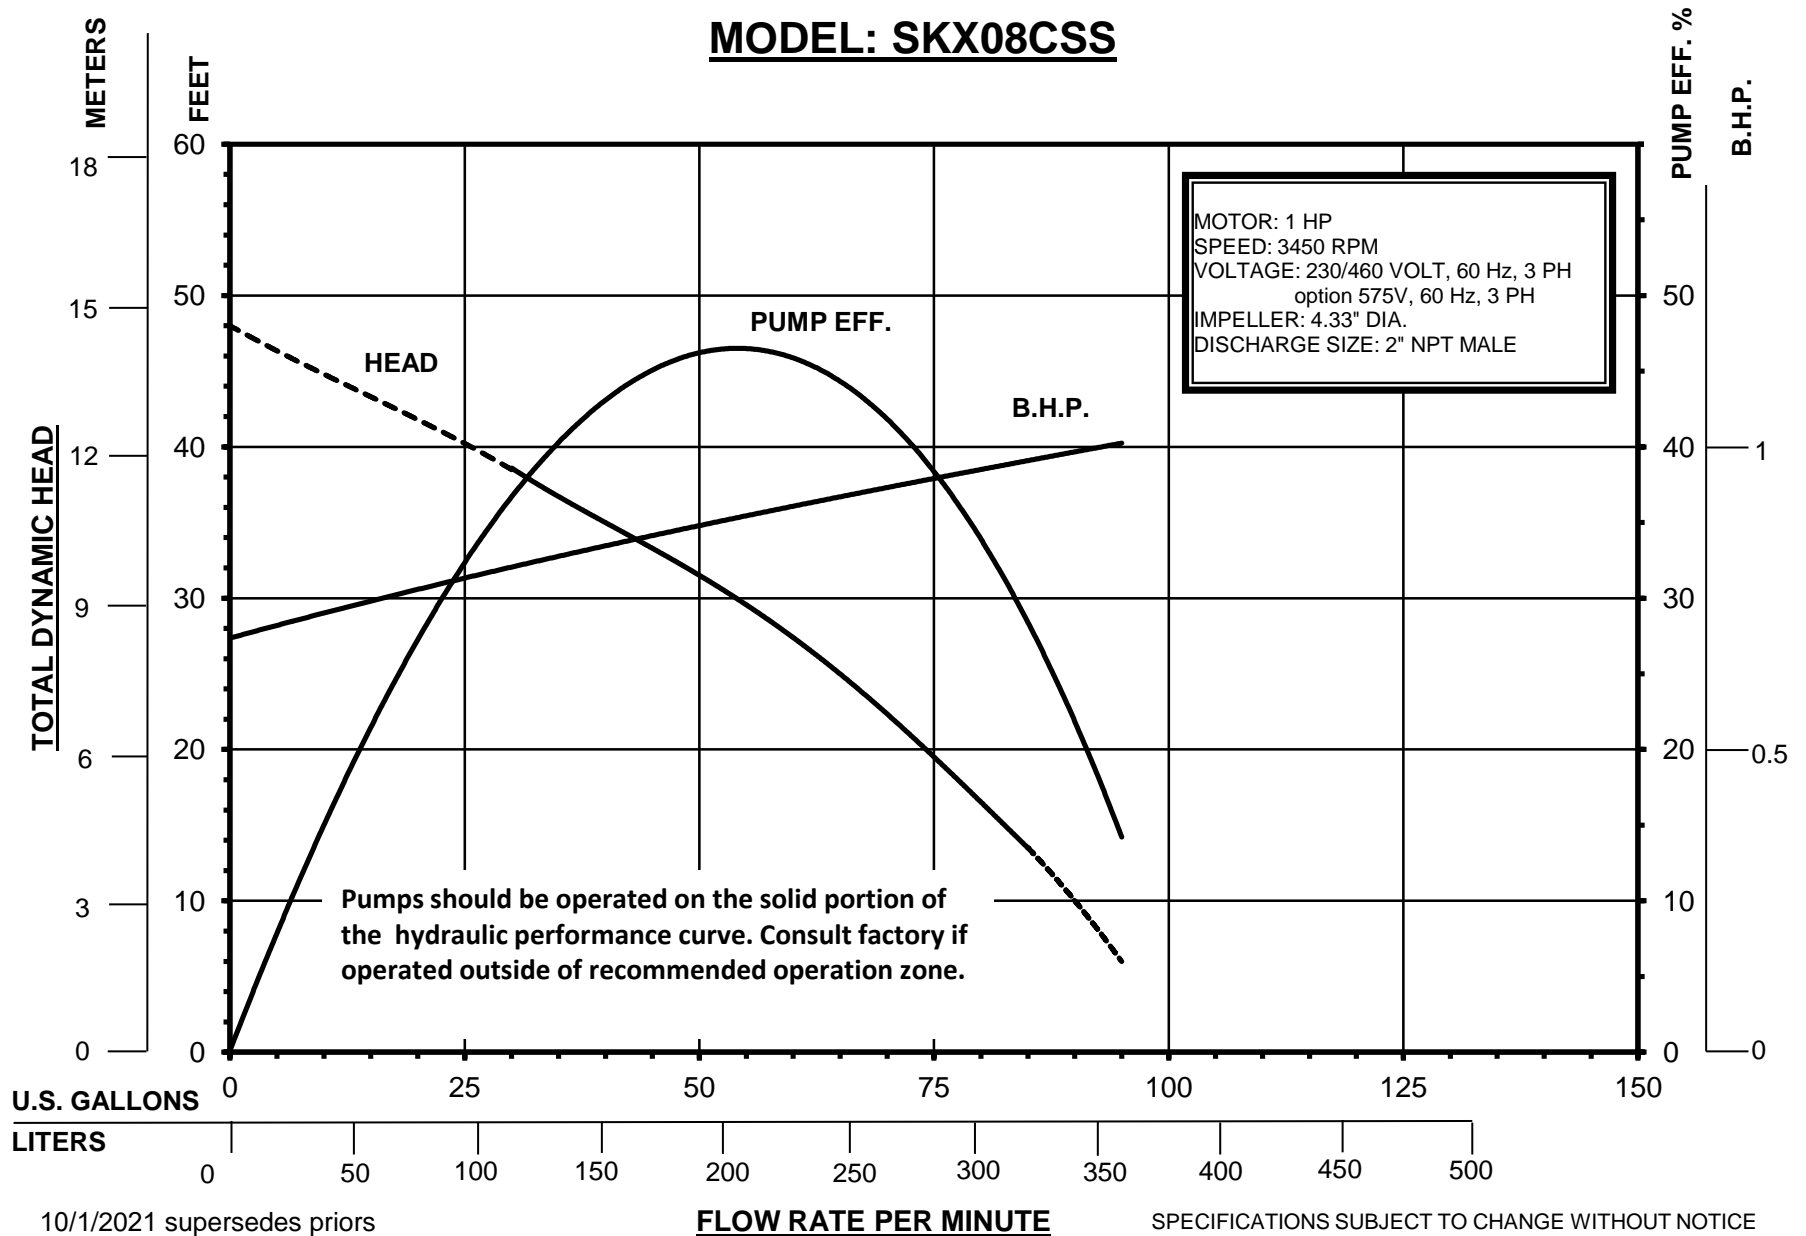

10/1/2021 supersedes priors

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE