

**TECHNICAL DATA
 MODEL XP-SKG37C
 EXPLOSION PROOF
 FM APPROVED CLASS I, DIVISION 1, GROUP C & D MOTOR
 GENERAL DATA**



MAX. FLOW: GPM (L/min)	410 GPM @ 15' (1551.9 L/min @ 4.6 m)
MAX. HEAD: ft (m)	42' @ 75 GPM (12.8 m @ 283.9 L/min)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	AXIAL & RADIAL SHREDDER
IMPELLER DIAMETER: in (mm)	7.13" (181.1 mm)
DISCHARGE SIZE	3" NPT-FEMALE
PUMP WEIGHT, without cable: lbs (kg)	216 lbs (98 kg)
SHIPPING WEIGHT: lbs (kg)	261 lbs (118 kg)

CONSTRUCTION / MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/ CERAMIC - BUNA
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE - BUNA
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	CAST IRON
IMPELLER	DOUBLE VANE, 12% CHROME IRON
CUTTER BAR	440C SS, HEAT TREATED 58-60 Rc
AXIAL CUTTER RING	440C SS, HEAT TREATED 58-60 Rc
RADIAL CUTTER RING	440C SS, HEAT TREATED 58-60 Rc
SUCTION COVER	12% CHROME IRON
STAND	CAST IRON
LIPSEAL & O-RINGS	BUNA-N
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: PERM. LUBE. UPPER	SINGLE ROW, SEALED BALL BEARING
BALL BEARING: PERM. LUBE. LOWER	SINGLE ROW, SEALED BALL BEARING

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 5 HP (CONTINUOUS DUTY)			
MOTOR RPM	1750			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.15			
VOLTAGE - 3 PH, 60 Hz	208V	230V	460V	575V option
CURRENT F.L.A.	15	13.9	7	5.6
POWER CABLE: GAGE; LENGTH	A.W.G. 10/4; 50' (15m), SOOW, 90°C, 600V			
SENSOR CABLE: GAGE; LENGTH	A.W.G. 14/4; 50' (15m), SOOW, 90°C, 600V			
MOTOR PROTECTION	TWO NORMALLY CLOSED THERMOSTATS			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			
SEAL LEAK DETECTOR ¹	Seal Minder®; MOISTURE SENSING PROBE			

1- Requires a seal fail circuit in control panel for warning signal.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive


New Haven, CT. 0613, USA

Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

© 2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

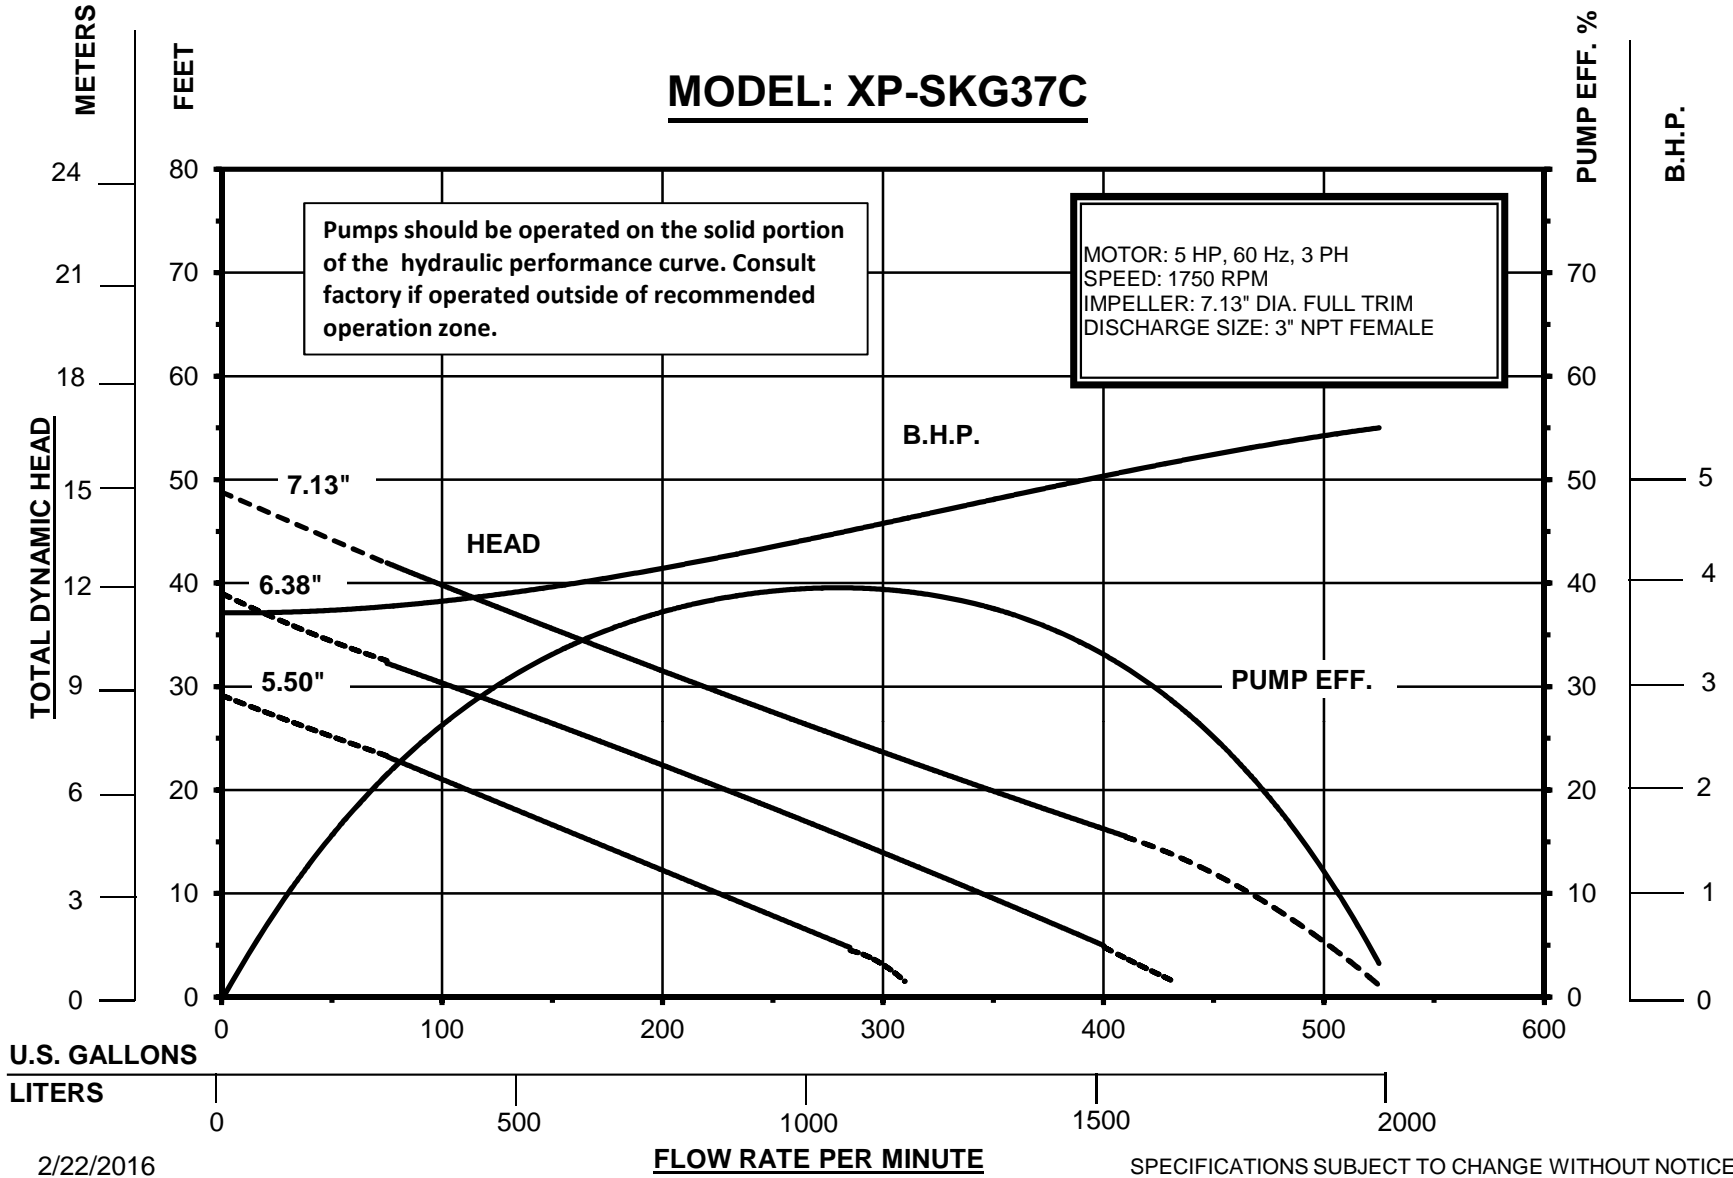

2/22/2016