

TECHNICAL DATA
MODEL XP-SKX37CSS
EXPLOSION PROOF
FM APPROVED CLASS 1, DIVISION 1, GROUP C & D MOTOR



GENERAL DATA

MAX. FLOW: GPM (L/min)	360 GPM (1382 L/min)
MAX. HEAD: ft (m)	62' @ 80 GPM (18.9 m @ 307 L/min)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord
PUMP TYPE	NON CLOG, SHREDDER
SOLID SIZE: in (mm)	1.6" (40.6 mm)
IMPELLER DIAMETER: in (mm)	4.88" (124 mm)
DISCHARGE SIZE	3" NPT-MALE
SLIDE RAIL SIZE	NON-SPARKING 3" SLIDE RAIL, SR-XP3
PUMP WEIGHT, without cable: lbs (kg)	168 lbs (76kg)
SHIPPING WEIGHT: lbs (kg)	178 lbs (81kg)

CONSTRUCTION/MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON / CERAMIC, FKM
MECHANICAL SEAL - LOWER	SILICON CARBIDE / SILICON CARBIDE, FKM
MOTOR HOUSING	CAST IRON, EPOXY COATED
PUMP VOLUTE	316 SS
IMPELLER	TWO VANE, 316 SS
IMPELLER SHREDDER BLADE	TUNGSTEN CARBIDE
STAND	316 SS
SUCTION COVER	316 SS
LIPSEAL & O-RINGS	FKM
ROTOR SHAFT	403 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: PERM. LUBE. UPPER	6305ZZC3
BALL BEARING: PERM. LUBE. LOWER	6307ZZC3

ELECTRICAL /MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 5 (CONTINUOUS DUTY)			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.15			
VOLTAGE - 3 PH, 60 Hz	208V	230V	460V	575V
CURRENT F.L.A.	15	13.9	7.0	5.6
LOCKED ROTOR CURRENT (LRA)	68	76	38	31
POWER CORD ¹ : GAGE; LENGTH	AWG 10/4 ; 50' (15m)		AWG 14/4; 50' (15m)	
SENSOR CORD ¹ : GAGE; LENGTH	AWG 14/4; 50' (15m)			
MOTOR PROTECTION	TWO NORMALLY CLOSED THERMOSTATS			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			
SEAL LEAK DETECTOR	SINGLE ELECTRODE LEAKAGE DETECTOR			

1- SOOW, 90°C, 600V UL/CSA portable cord.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive
 New Haven, CT. 0613, USA


Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

© 2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

MODEL: XP-SKX37C 2 VANE IMPELLER

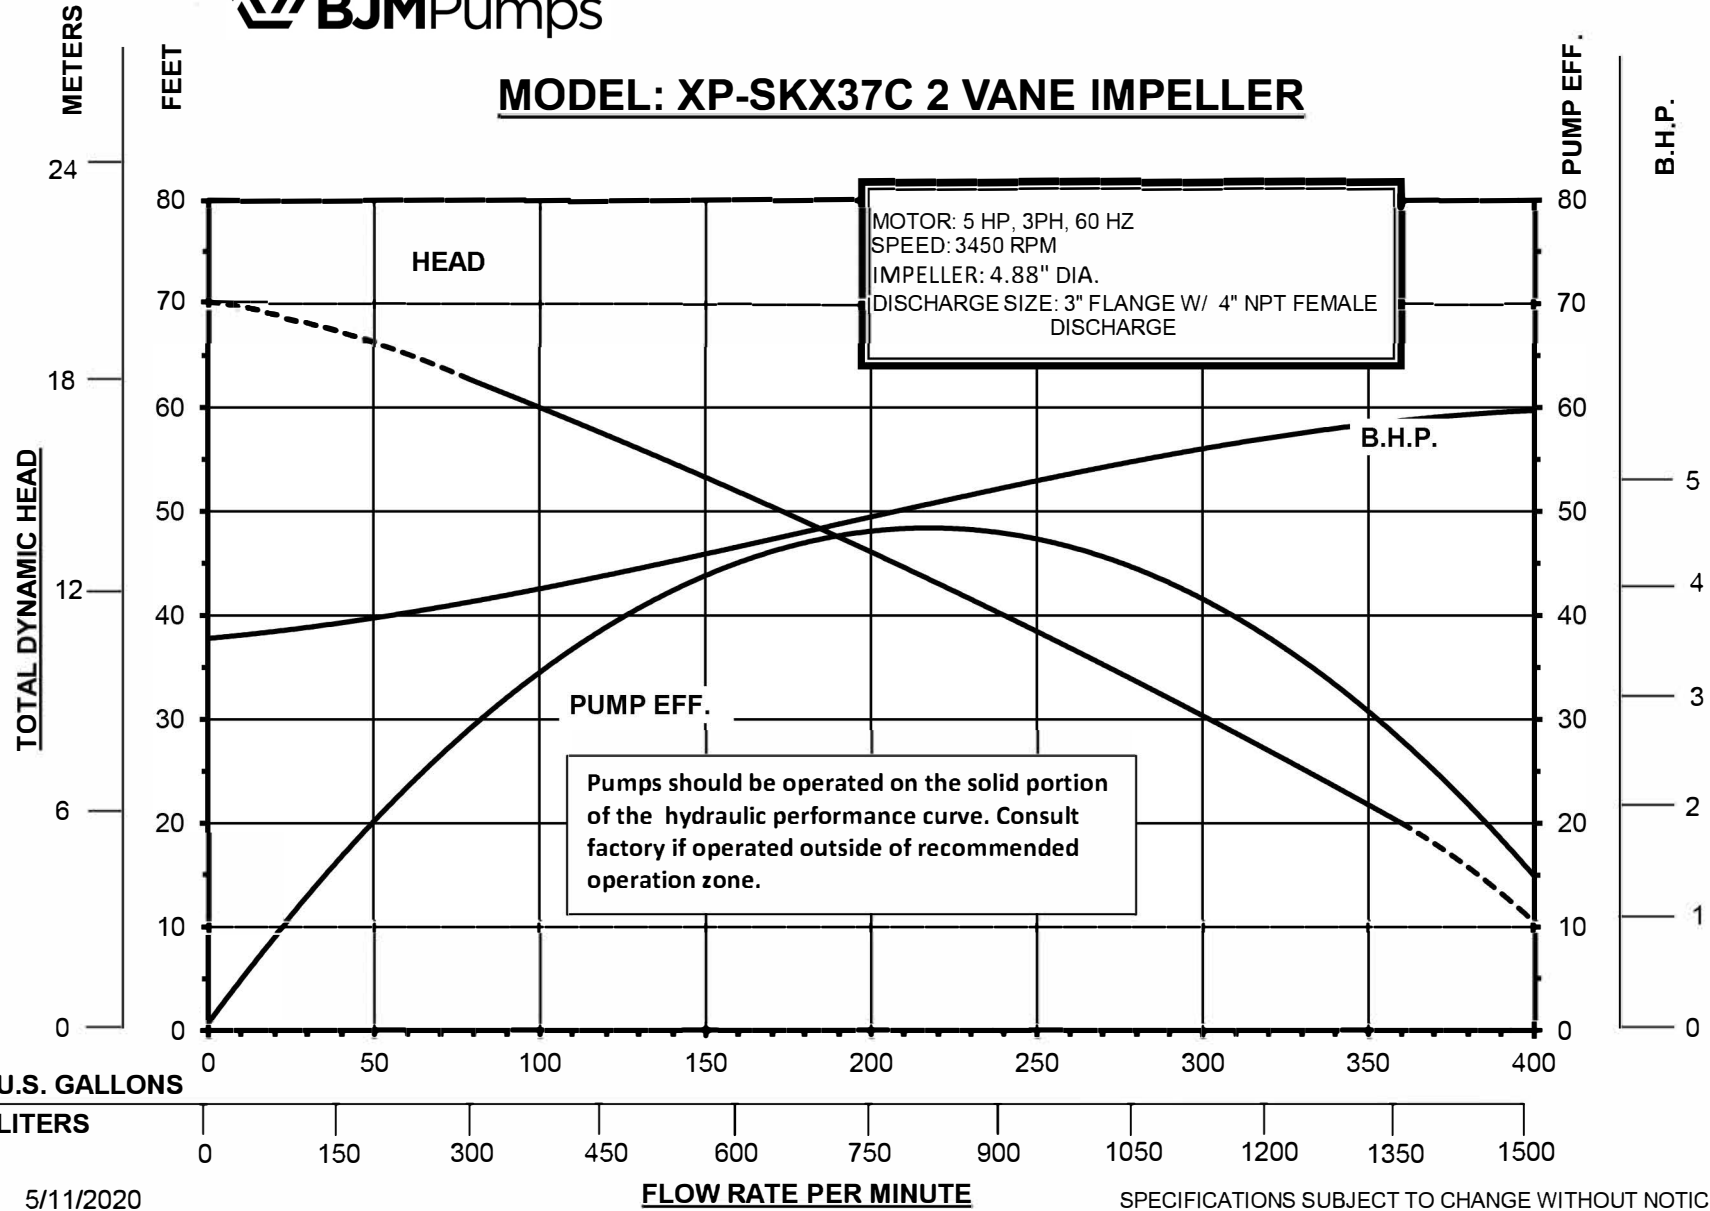

5/11/2020

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE