



High Temperature High Endurance Single Phase Pumps



Fahrenheit® Pumps

Submersible Pumps for Hot Liquids

Maximize your production and uptime with BJM Pumps® high temperature/high endurance pumps. We offer a single phase solution specifically engineered to handle water temperatures up to 200°F (93°C) reliably.

Durable and reliable to keep your production running, even in 24/7 continuous duty. Available for most liquids, including corrosive liquids and liquids containing solids. Cast iron or stainless steel construction available.


For more information, call 860-631-3618 or visit www.flowsolutions.com.



General Dewatering Pumps

JF & JXF Series – Clear Liquid Sump Pumps

The JF (Cast Iron) and JFX (316 Stainless Steel) Series pumps offer top quality and long pump lives for general pumping applications.

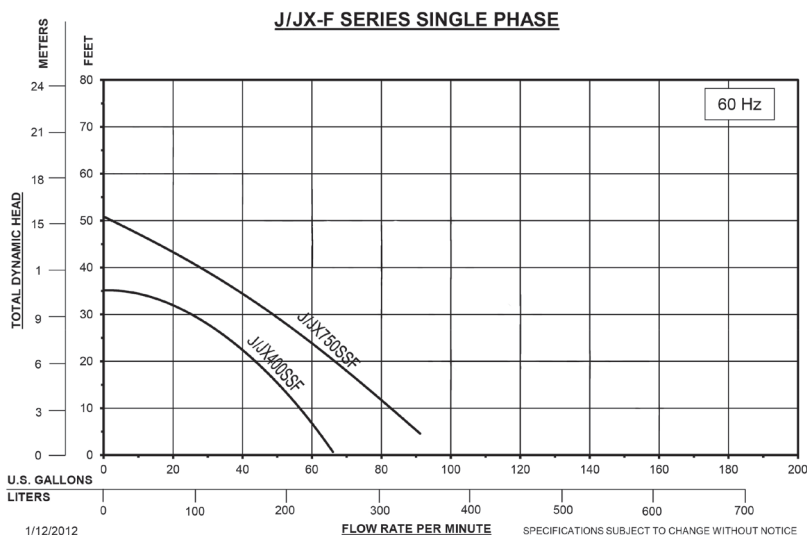


| | | | | | | | | | | | | | |
|-------|----|-----|---------|---|---------|-------|-----|----|----|----|-------|-------|-----|
| J400F | 2" | 0.5 | 115/230 | 1 | 8.5/5.5 | 1/8" | 35' | 66 | 45 | 32 | 15.7" | 8.5" | 50' |
| J750F | 2" | 1 | 115/230 | 1 | 16/8.5 | 3/16" | 50' | 91 | 70 | 55 | 17.3" | 11.2" | 50' |

| | | | | | | | | | | | | | |
|----------|----|-----|---------|---|---------|-------|-----|----|----|----|-------|-------|-----|
| JX400SSF | 2" | 0.5 | 115/230 | 1 | 8.5/5.5 | 1/8" | 35' | 66 | 45 | 32 | 15.7" | 8.5" | 50' |
| JX750SSF | 2" | 1 | 115/230 | 1 | 16/8.5 | 3/16" | 50' | 91 | 70 | 55 | 17.3" | 11.2" | 50' |

Solids Handling Pumps


SKF Series – Cast Iron Non-Clog Shredder Pumps

The SKF and SKXF Series pumps rip solids apart by using a tungsten carbide tip impeller against a spiral-shaped diffuser plate. The 360° shredding action allows for easier passage.

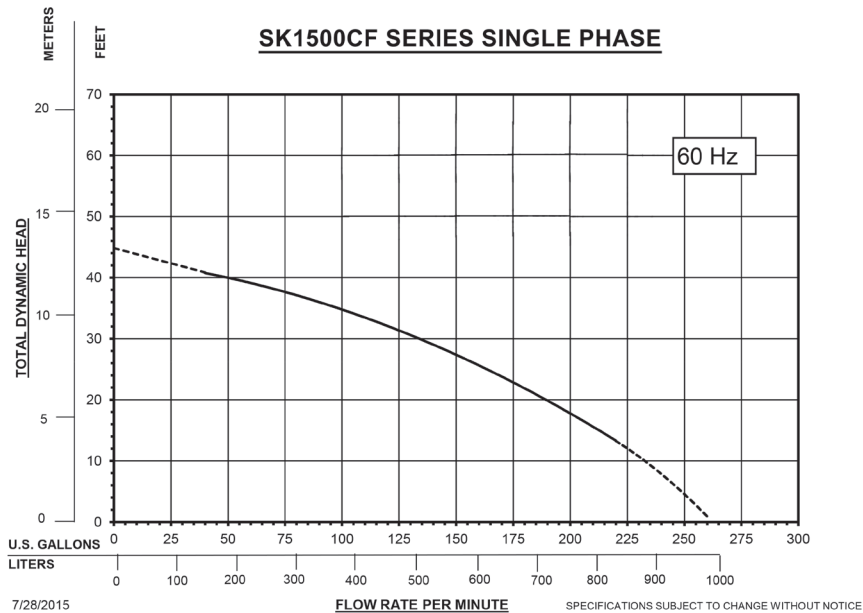

| | | | | | | | | | | | | | |
|----------|----|---|-----|---|----|------|-----|-----|-----|----|-------|-------|-----|
| SK1500CF | 3" | 2 | 230 | 1 | 16 | 2.5" | 46' | 185 | 110 | 90 | 21.5" | 13.5" | 50' |
|----------|----|---|-----|---|----|------|-----|-----|-----|----|-------|-------|-----|

SKXF Series – 316 Stainless Steel Non-Clog Shredder Pumps

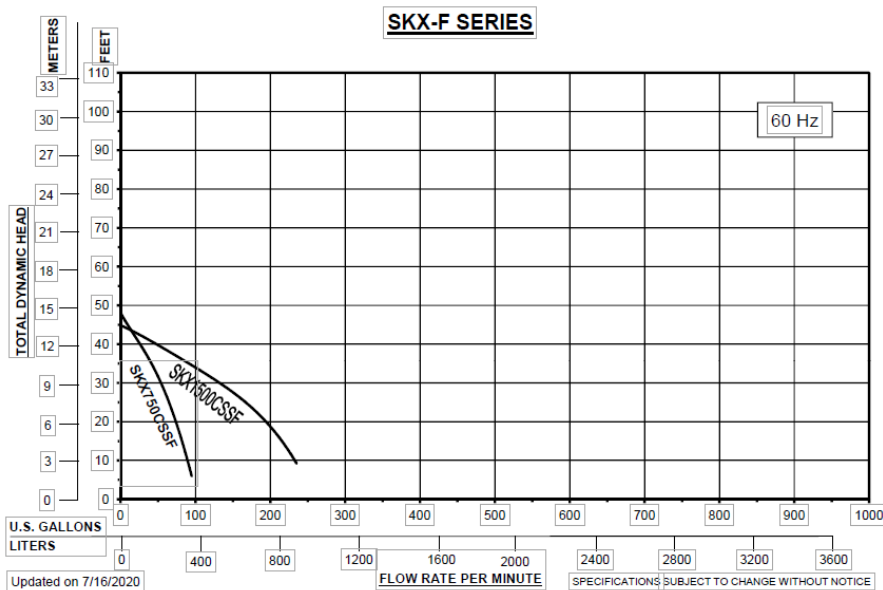


| | | | | | | | | | | | | | |
|-------------|----|---|---------|---|--------|------|-----|-----|-----|----|--------|--------|-----|
| SKX750CSSF | 2" | 1 | 115/230 | 1 | 16/8.5 | 2.5" | 48' | 95 | 85 | 66 | 22.25" | 13.5" | 50' |
| SKX1500CSSF | 3" | 2 | 230 | 1 | 16 | 2.5" | 46' | 185 | 110 | 90 | 21.25" | 14.75" | 50' |

Solids Handling Pumps


SVF Series – Vortex Pumps

The SVF Series pumps offer Vortex impellers, perfect for dealing with sludge, sewage, trash and industrial waste.

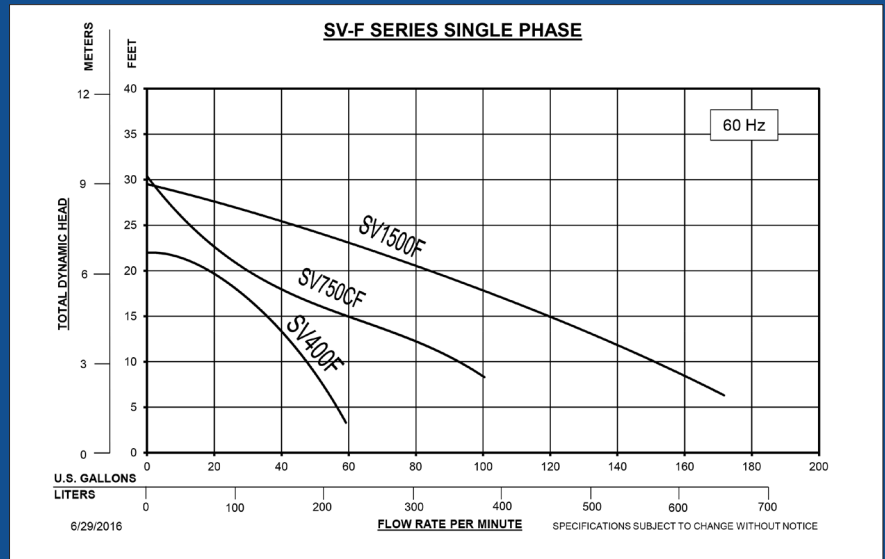

| | | | | | | | | | | | | | |
|---------|----|-----|---------|---|---------|------|-----|-----|-----|----|-------|-------|-----|
| SV400F | 2" | 0.5 | 115/230 | 1 | 8.5/5.5 | 1.5" | 22' | 59 | 50 | 34 | 18.4" | 8.5" | 50' |
| SV750CF | 3" | 1 | 115/230 | 1 | 16/8.5 | 2" | 32' | 100 | 90 | 68 | 20.8" | 13.8" | 50' |
| SV1500F | 3" | 2 | 230 | 1 | 16 | 2.5" | 29' | 171 | 110 | 92 | 23.6" | 15.3" | 50' |

Control Box – Standard

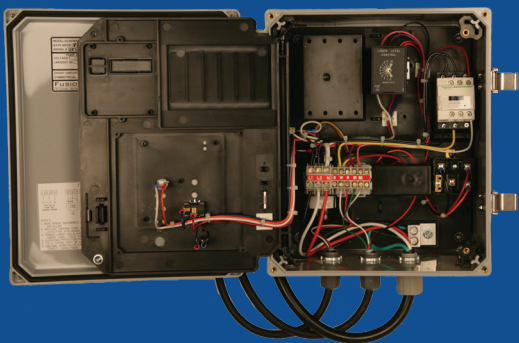

All single phase Fahrenheit® pumps are supplied with a NEMA 4X control box including pump start components, Seal Minder® relay, motor thermal sensor connections, and high temperature wide angle float switch with 20' cable. These single-phase controls meet UL 508A and cUL CSA-22.2 requirements.

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



**INDUSTRIAL
FLOW
SOLUTIONS™**

104 John W Murphy Drive
New Haven, CT 06513
Tel: (860) 631-3618
Fax: (860) 399-7784
Web: www.flowsolutions.com

Distributor: