



INDUSTRIAL
FLOW
SOLUTIONS™

TECHNICAL DATA

Mine Dewatering Pumps P30CE HH &HV

Dwg: DS-A16-006 Rev: 5 Date: 2/23/2026

Motor Specifications

Motor Design	NEMA design B, squirrel cage induction, air filled
Motor Type	Enclosed submersible, IP 68
Maximum submergence	65 feet (20m)
Insulation Class	Class F, rated at 155° C
Motor Protection	Bi-metallic Thermal Switch
Bi-Metallic Temp Trip	130° C ± 5° C
Service Factor	1.15
Max. Liquid Temperature	104°F (40°C)
Voltage Tolerance	± 10% from nominal
MSHA Approval	2G-2796 230 Volt, 2G-3796A 460 Volt, 2G-2796A-1 575 Volt



Motor Data, 60Hz

Model	Phase	Output Power BHP	Volts	Full Load Amps	Locked Rotor Amps	Nema Code Letter	Power Factor	Motor Efficiency	Pole/Speed (Rpm)
							100% Load		
P30CE	3Ø	4.6	230V	13	88.4	J	0.83	0.76	2/3450
			460V	6.5	44.2	J	0.83	0.76	2/3450
			575V	4.8	35.4	J	0.83	0.76	2/3450

Materials of Construction

	Standard	High Chrome
Upper Motor Lid	356-T6 Aluminum	356-T6 Aluminum
Motor Housing	356-T6 Aluminum	356-T6 Aluminum
Lower Seal Housing	AISI 304 Stainless Steel	ASTM A532 Class III Type Chromium
Strainer	AISI 304 Stainless Steel	AISI 304 Stainless Steel
Volute	356-T6 Aluminum - Rubber Lined	356-T6 Aluminum Polyurethane Lined
External Hardware	AISI 304 Stainless Steel	AISI 304 Stainless Steel
O-Rings	NBR	NBR
Motor Shaft	AISI 416 Stainless Steel	AISI 416 Stainless Steel
Upper Bearing	Deep groove ball bearing, double shielded	Deep groove ball bearing, double shielded
Lower Bearing	Double row angular contact ball bearing, double shielded	Double row angular contact ball bearing, double shielded
Shaft Seal	SiC/SiC	SiC/SiC
Impeller	AISI 316 Stainless Steel	ASTM A532 Class III Type Chromium

DIMENSIONS, WEIGHT, AND MISC.

Pump weight (without cable)	77lbs (35kg)
Discharge size, standard	3 inch NPT male vertical
Strainer Opening	8mmx24.5mm

CABLE SPECIFICATIONS

Model	Phase/Voltage	Power Cable*	Length*	Outer Jacket
P30CE	3Ø	230V Drill Cord SOOW 12/5, 10/5, 8/3G-GC	Per MSHA Approval	CPE, Heavy Duty
		460V Drill Cord SOOW 12/5, 10/5, 8/3G-GC	Per MSHA Approval	CPE, Heavy Duty
		575V Drill Cord SOOW 12/5, 10/5,	Per MSHA Approval	CPE, Heavy Duty

* Cable size and length per MSHA approval.



Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 •

www.flowsolutions.com






INDUSTRIAL FLOW SOLUTIONS™

PERFORMANCE CURVE

Stancor® Mine Dewatering Pumps P30CE HV

Dwg:	DS-16-008	Rev:	5	Date:	12/18/2025
------	-----------	------	---	-------	------------

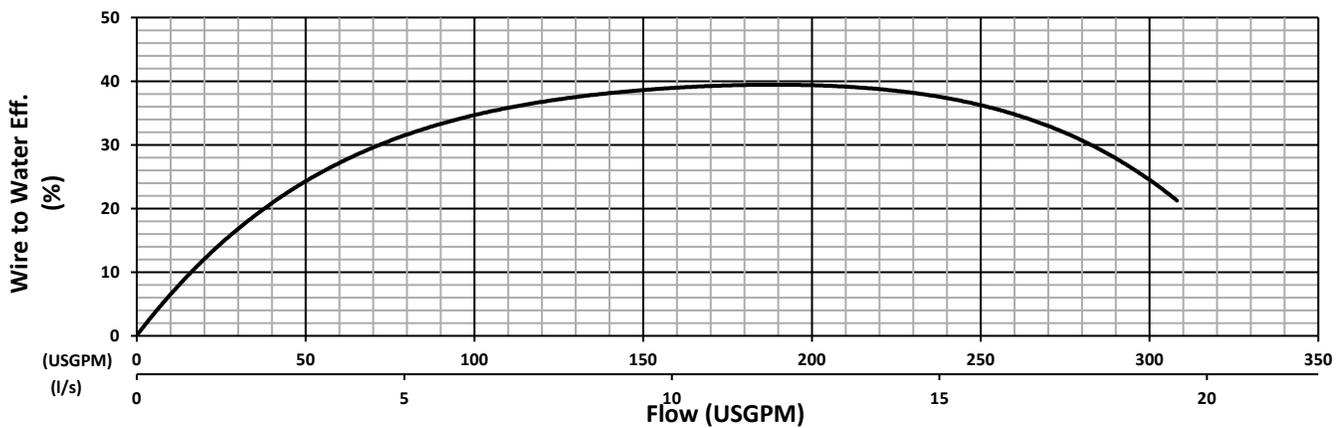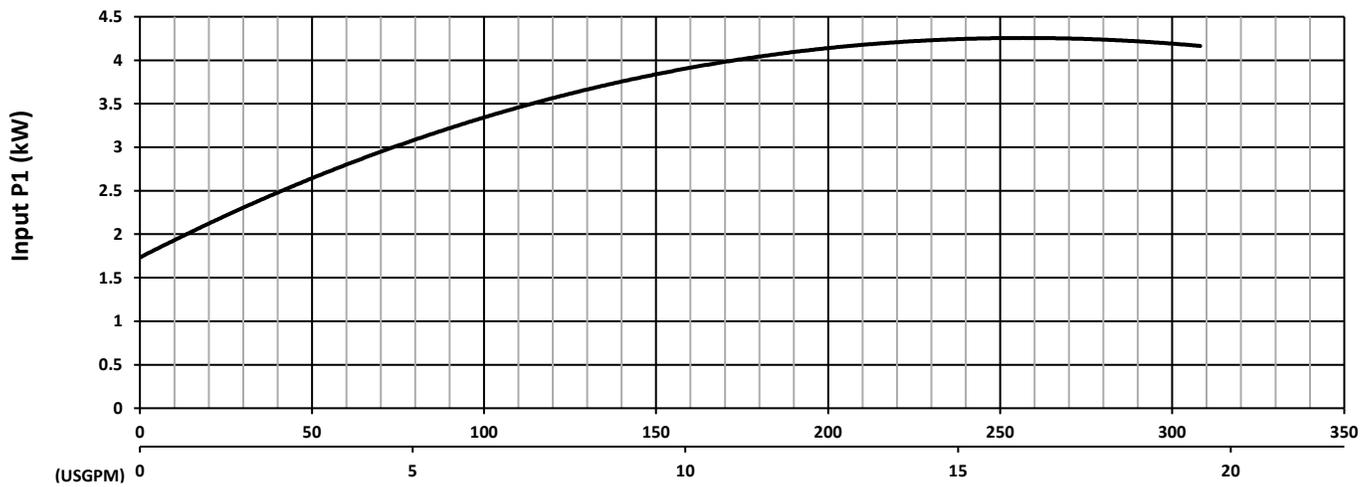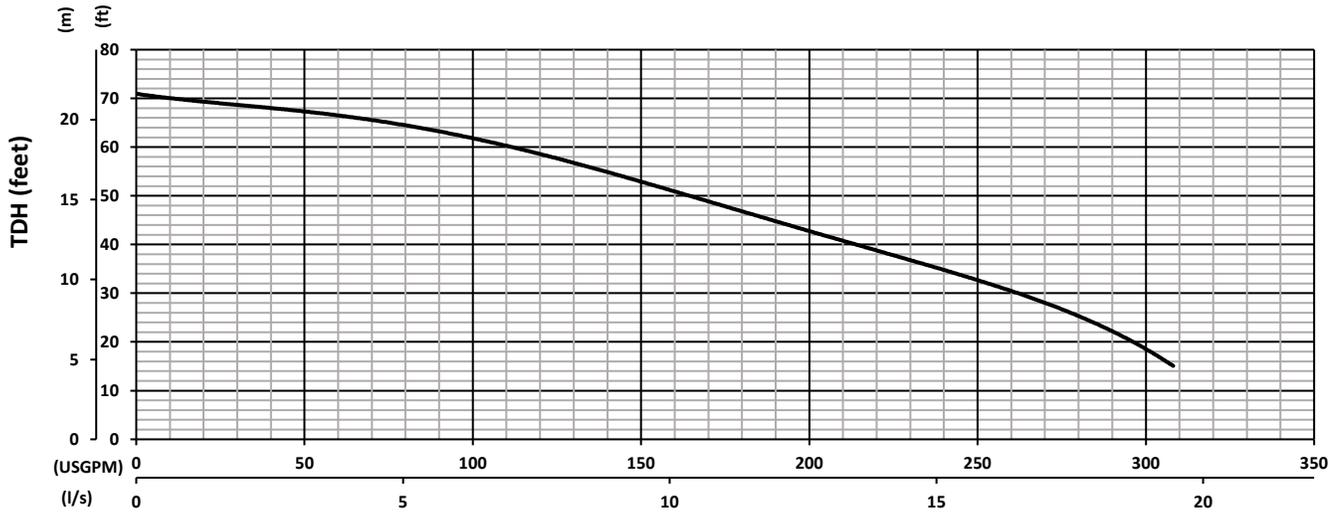

Test Standard : HI 11.6 Gr 3B
 Tested with water at 20°C

Mine Dewatering Pumps P30CE HV - Dual Units

Frequency 60 Hz
 Pump Speed 3450 RPM
 Impeller 125mm

Specifications subject to change without notice



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

Stancor® Mine Dewatering Pumps P30CE HH

Dwg:




DS-A16-047

Rev:

7

Date:

12/18/2025

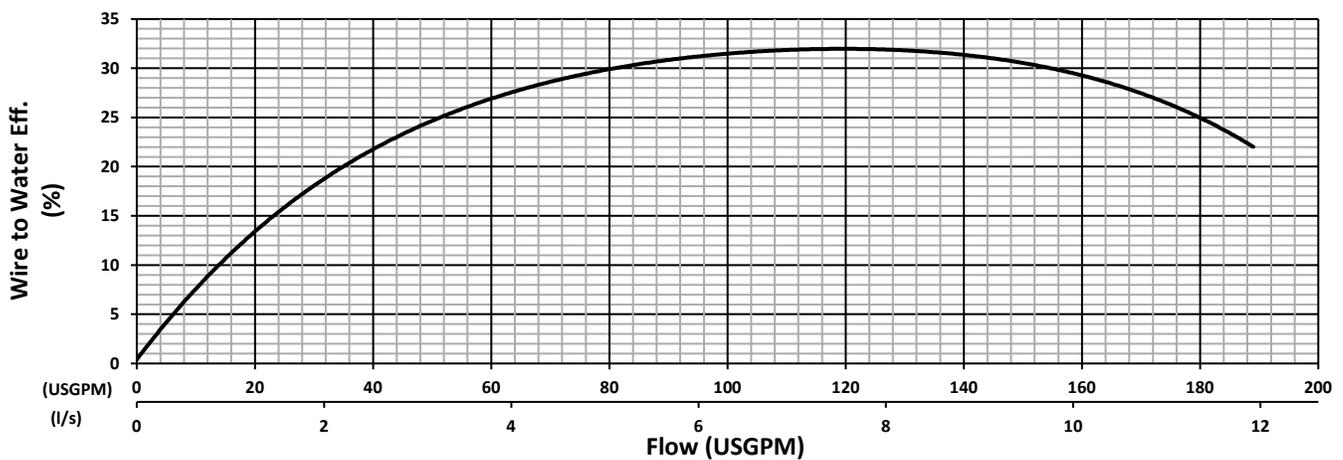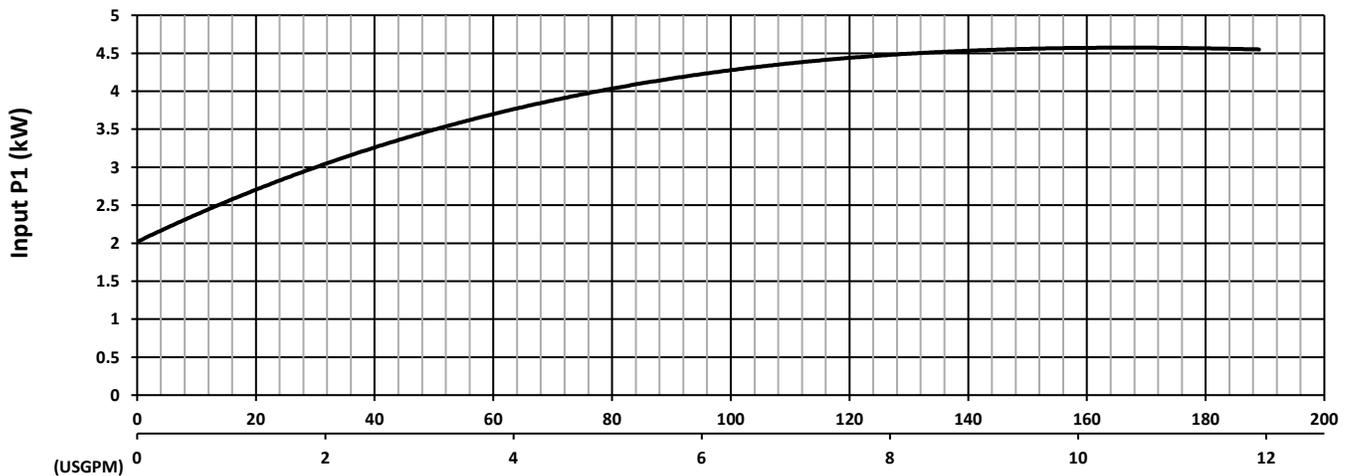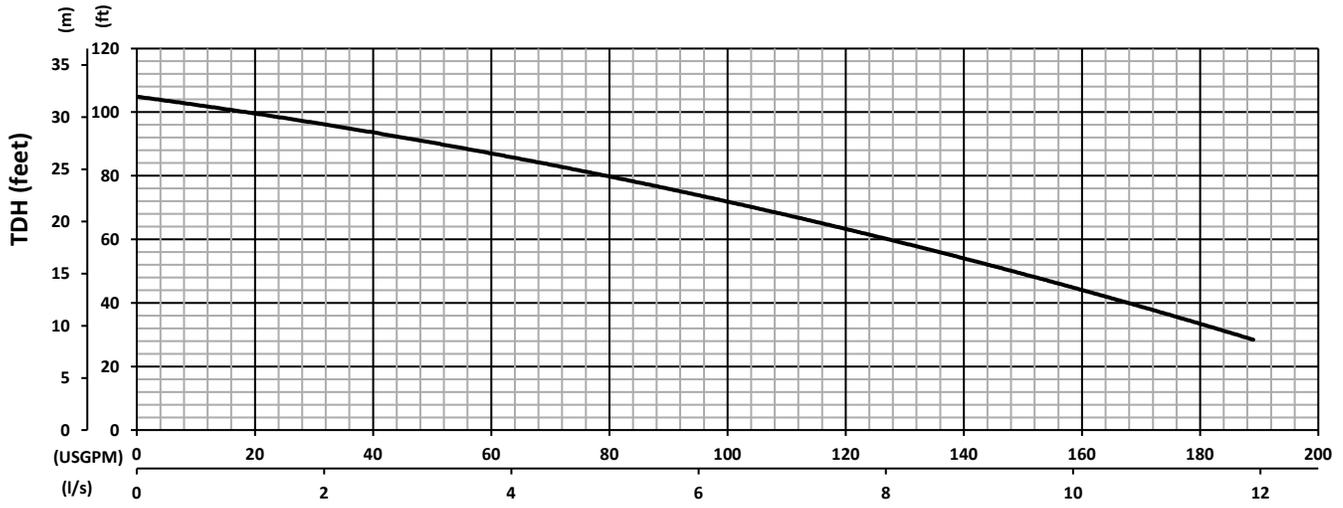

Test Standard : HI 11.6 Gr 3B

Tested with water at 20°C

Mine Dewatering Pumps - Dual Units

Frequency

60 Hz

Pump Speed

3450 RPM

Impeller

160mm

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 •

www.flowsolutions.com