

MOTOR SPECIFICATIONS

Motor Design	NEMA design B, squirrel cage induction, air filled
Motor Type	Enclosed submersible, IP 68
Maximum submergence	65 feet (20m)
Insulation Class	Class F, rated at 155° C
Motor Protection	Bi-metallic Thermal Switch
Bi-Metallic Temp Trip	130° C ± 5° C
Service Factor	1.15
Max. Liquid Temperature	104°F (40°C)
Voltage Tolerance	± 10% from nominal
CSA Approval	CSA-C22.2 No. 108-14 - CSA-C22.2 No. 77-95 (R 2009)



MOTOR DATA, 60Hz

Model	Phase	Output Power BHP	Volts	Full Load Amps	Locked Rotor Amps	NEMA Code Letter	Power Factor 100% Load	Motor Efficiency 100% Load	Pole/Speed (rpm)
S750	1	6.4	208	24.3	166.8	F	.76	.80	2/3450
			230	22	151	F	.76	.80	2/3450
	3	6.4	208	19.7	135.7	J	.76	.80	2/3450
			230	17.8	122.6	J	.76	.80	2/3450
			460	8.9	61.3	J	.76	.80	2/3450
			575	8.6	49	J	.76	.80	2/3450

MATERIALS OF CONSTRUCTION

Material	Standard	High Chrome
Upper Motor Lid	356-T6 Aluminum	356-T6 Aluminum
Motor Housing	356-T6 Aluminum	356-T6 Aluminum
Lower Seal Housing	AISI 304 Stainless Steel	ASTM A532 Class III Type Chromium
Volute	356-T6 Aluminum - Rubber Lined	356-T6 Aluminum - Polyurethane Lined
External Hardware	AISI 304 Stainless Steel	AISI 304 Stainless Steel
O-Rings	NBR	NBR
Motor Shaft	AISI 416 Stainless Steel	AISI 416 Stainless Steel
Upper Bearing	Deep groove ball bearing, double shielded	Deep groove ball bearing, double shielded
Lower Bearing	Double row angular contact ball bearing, double shielded	Double row angular contact ball bearing, double shielded
Shaft Seal	SiC/SiC	SiC/SiC
Impeller	AISI 316 Stainless Steel	ASTM A532 Class III Type Chromium

DIMENSIONS, WEIGHT, AND MISC.

Pump weight (without cable)	87 lbs (39.5kg)
Discharge size, HH	3 inch NPT male vertical
Discharge size, HV	4 inch NPT male vertical
Strainer Opening	9mmX22mm

CABLE SPECIFICATIONS


MODEL	PHASE/VOLTAGE	POWER CABLE	LENGTH	OUTER JACKET
S750	1Ø-208V	8/3G-GC	65' Standard	CPE, Heavy Duty
	1Ø-230V	SOOW 10/4, 8/4+16/3 or SHD-GC	65' Standard	CPE, Heavy Duty
	3Ø-208V	10/4 SOOW	65' Standard	CPE, Heavy Duty
	3Ø-230V	SOOW 12/4, 10/5, 8/4+16/3 or SHD-GC	65' Standard	CPE, Heavy Duty
	3Ø-460V	SOOW 12/7, 12/5, 12/4, 10/5, or SHD-GC	65' Standard	CPE, Heavy Duty
	3Ø-575V	SOOW 14/7, 12/5, 12/4, 10/5, or SHD-GC	65' Standard	CPE, Heavy Duty



Dwg: DS-A20-082

Rev: 0

Date: 4/19/2017

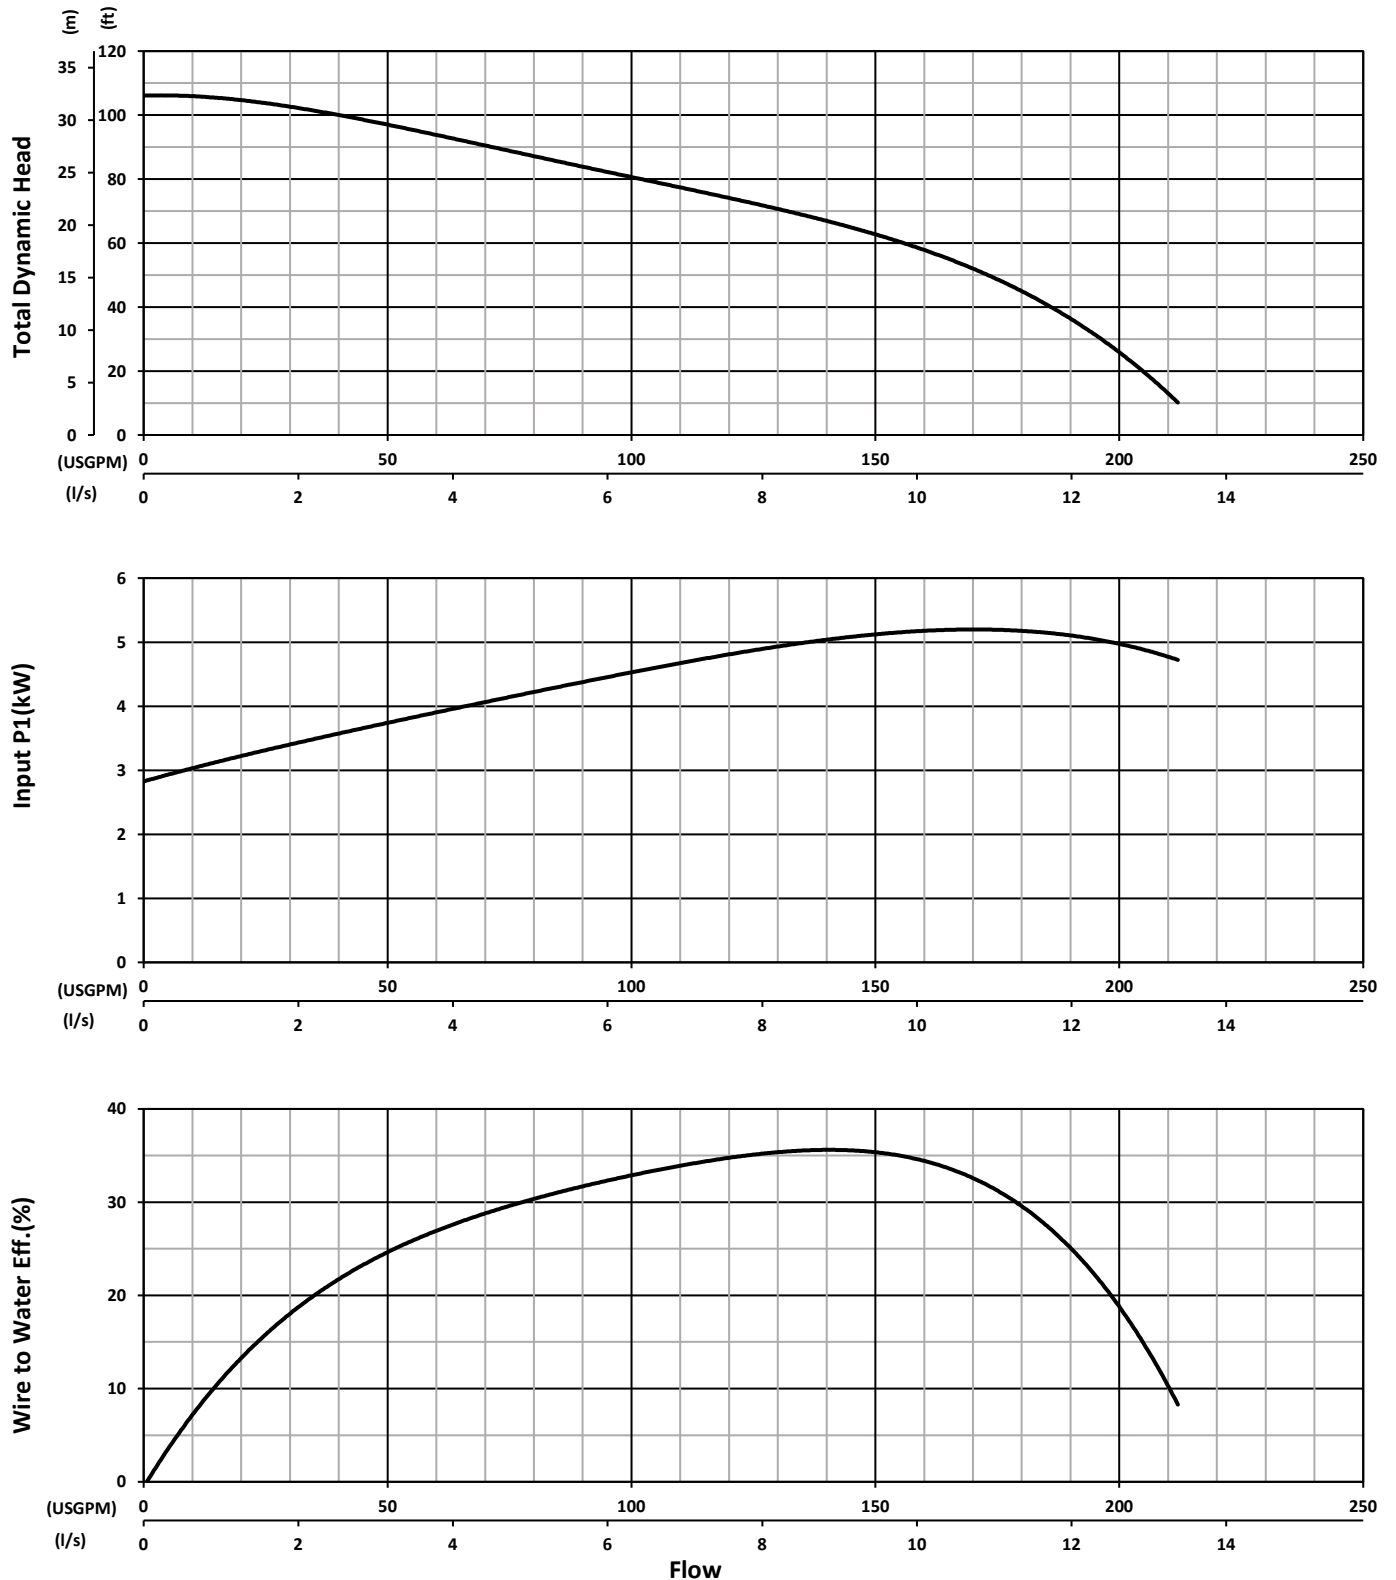


Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

Pump Performance Test - US Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller Ø160mm

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 • www.flowsolutions.com

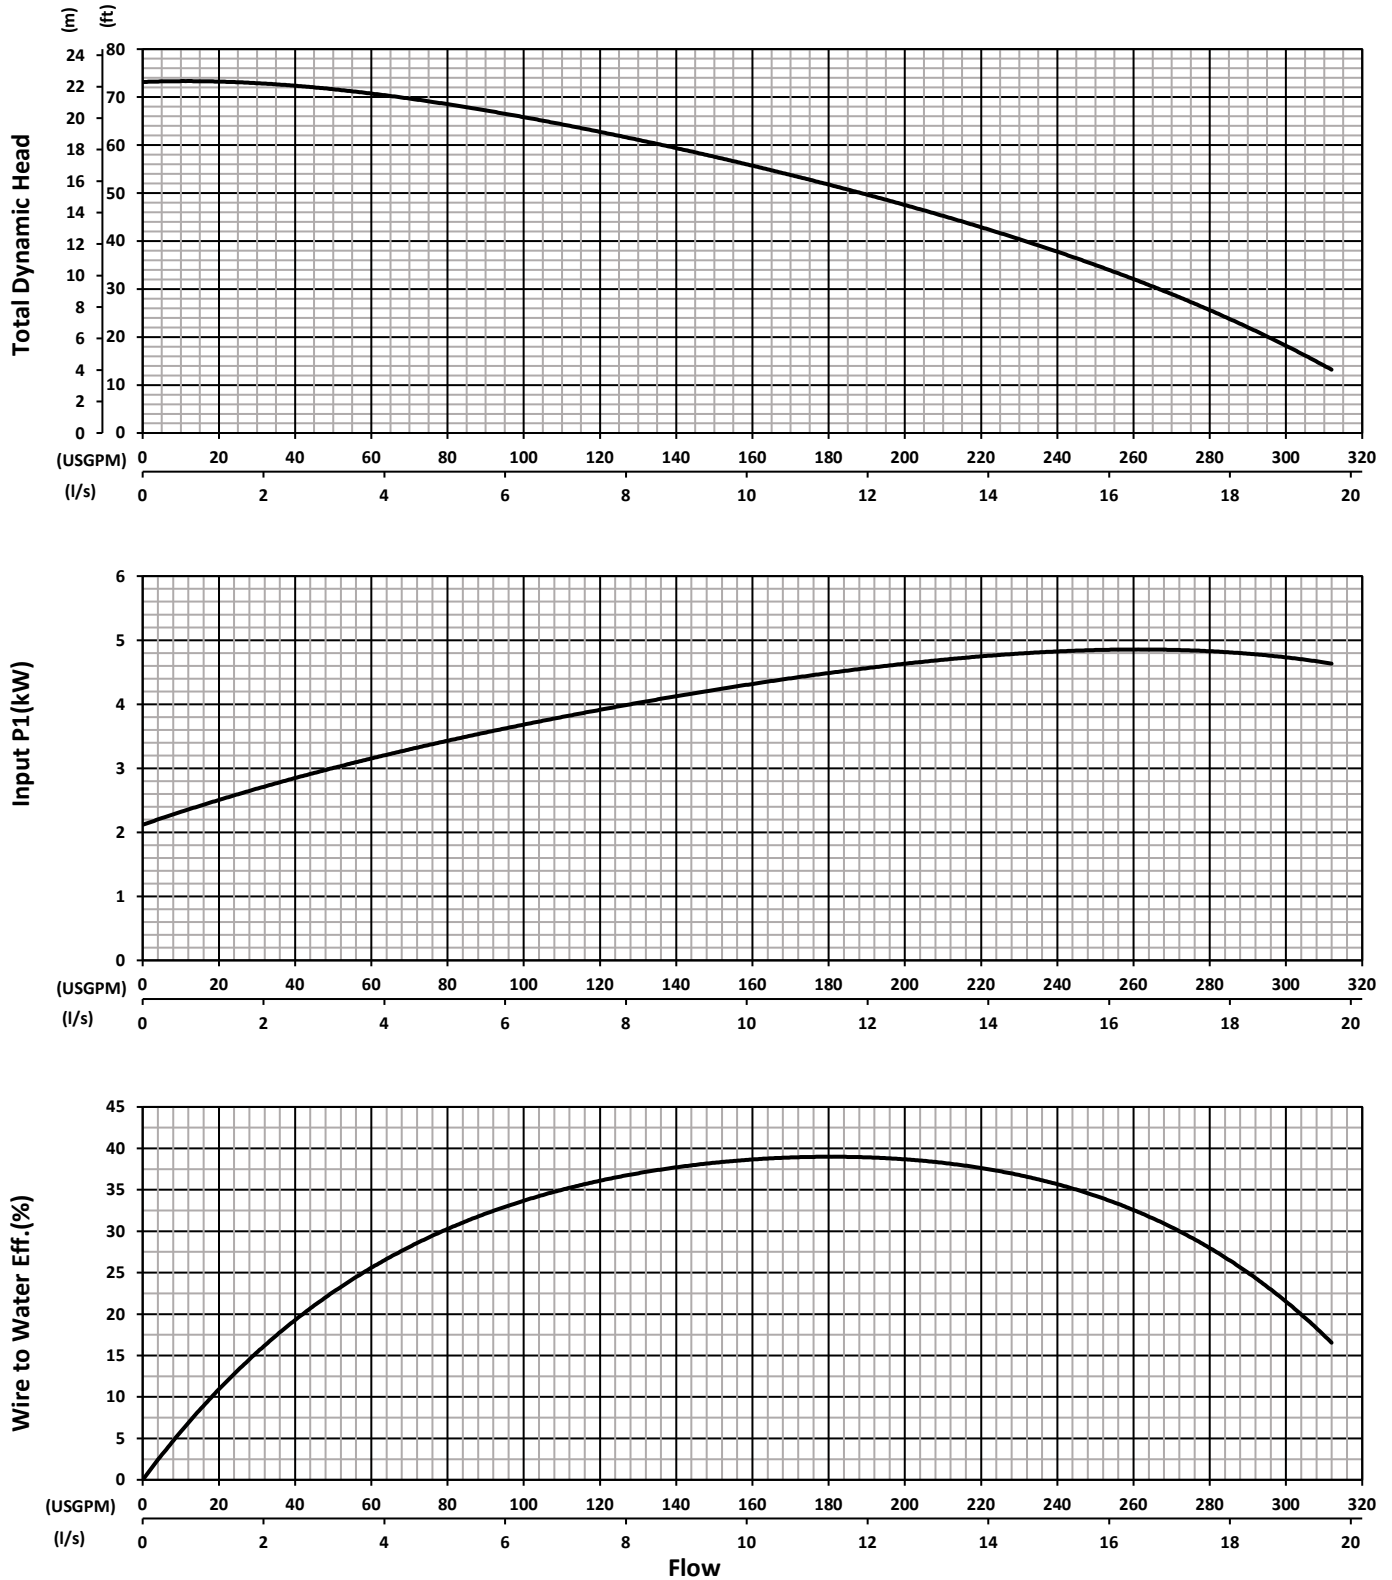

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

Pump Performance Test - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller Ø125mm


Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 • www.flowsolutions.com

Stancor, LP. 515 Fan Hill Road, Monroe, CT 06468

Tel: 203-268-7513

Fax : 203-268-7958

www.stancorpumps.com

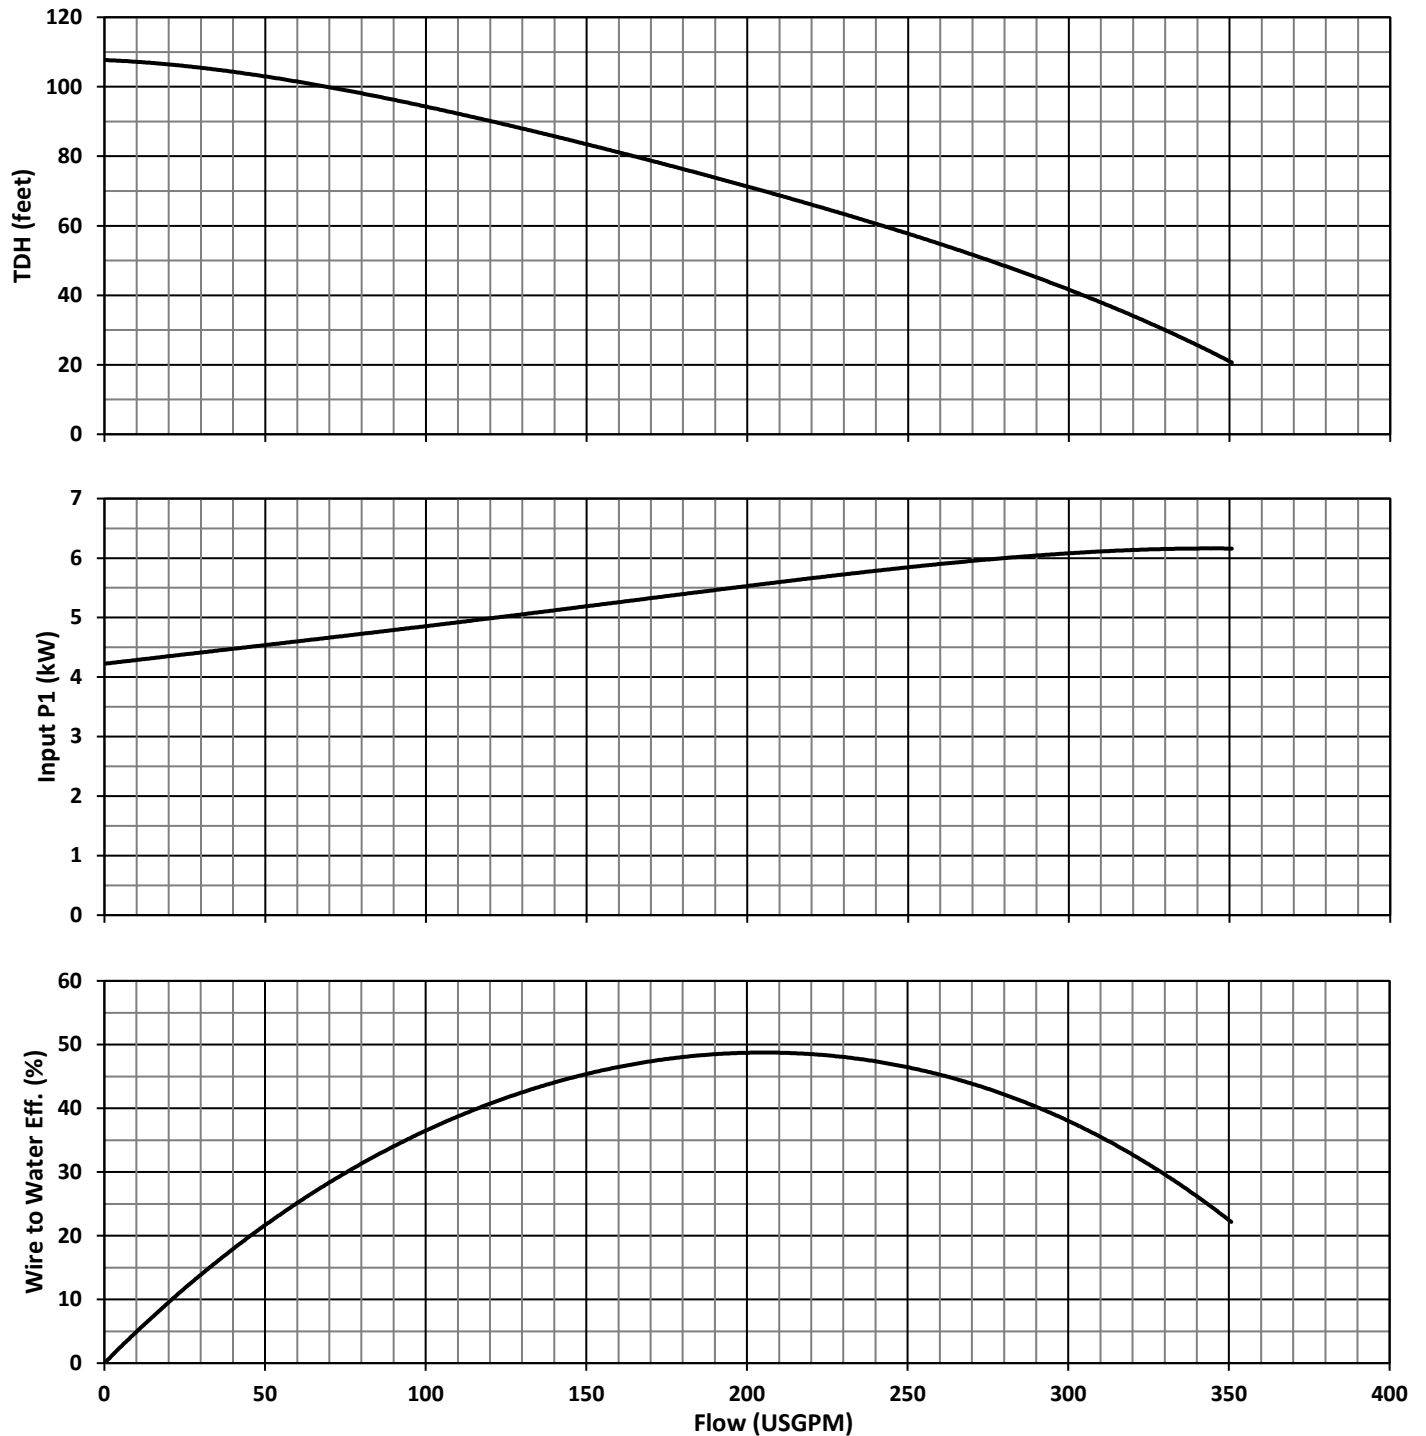

Pump Performance Test - US Units

Test Standard : HI 11.6 Gr 3B


Tested with water at 20°C

Frequency 60 Hz

Pump Speed 3450 RPM

Impeller Ø160mm

Specifications subject to change without notice

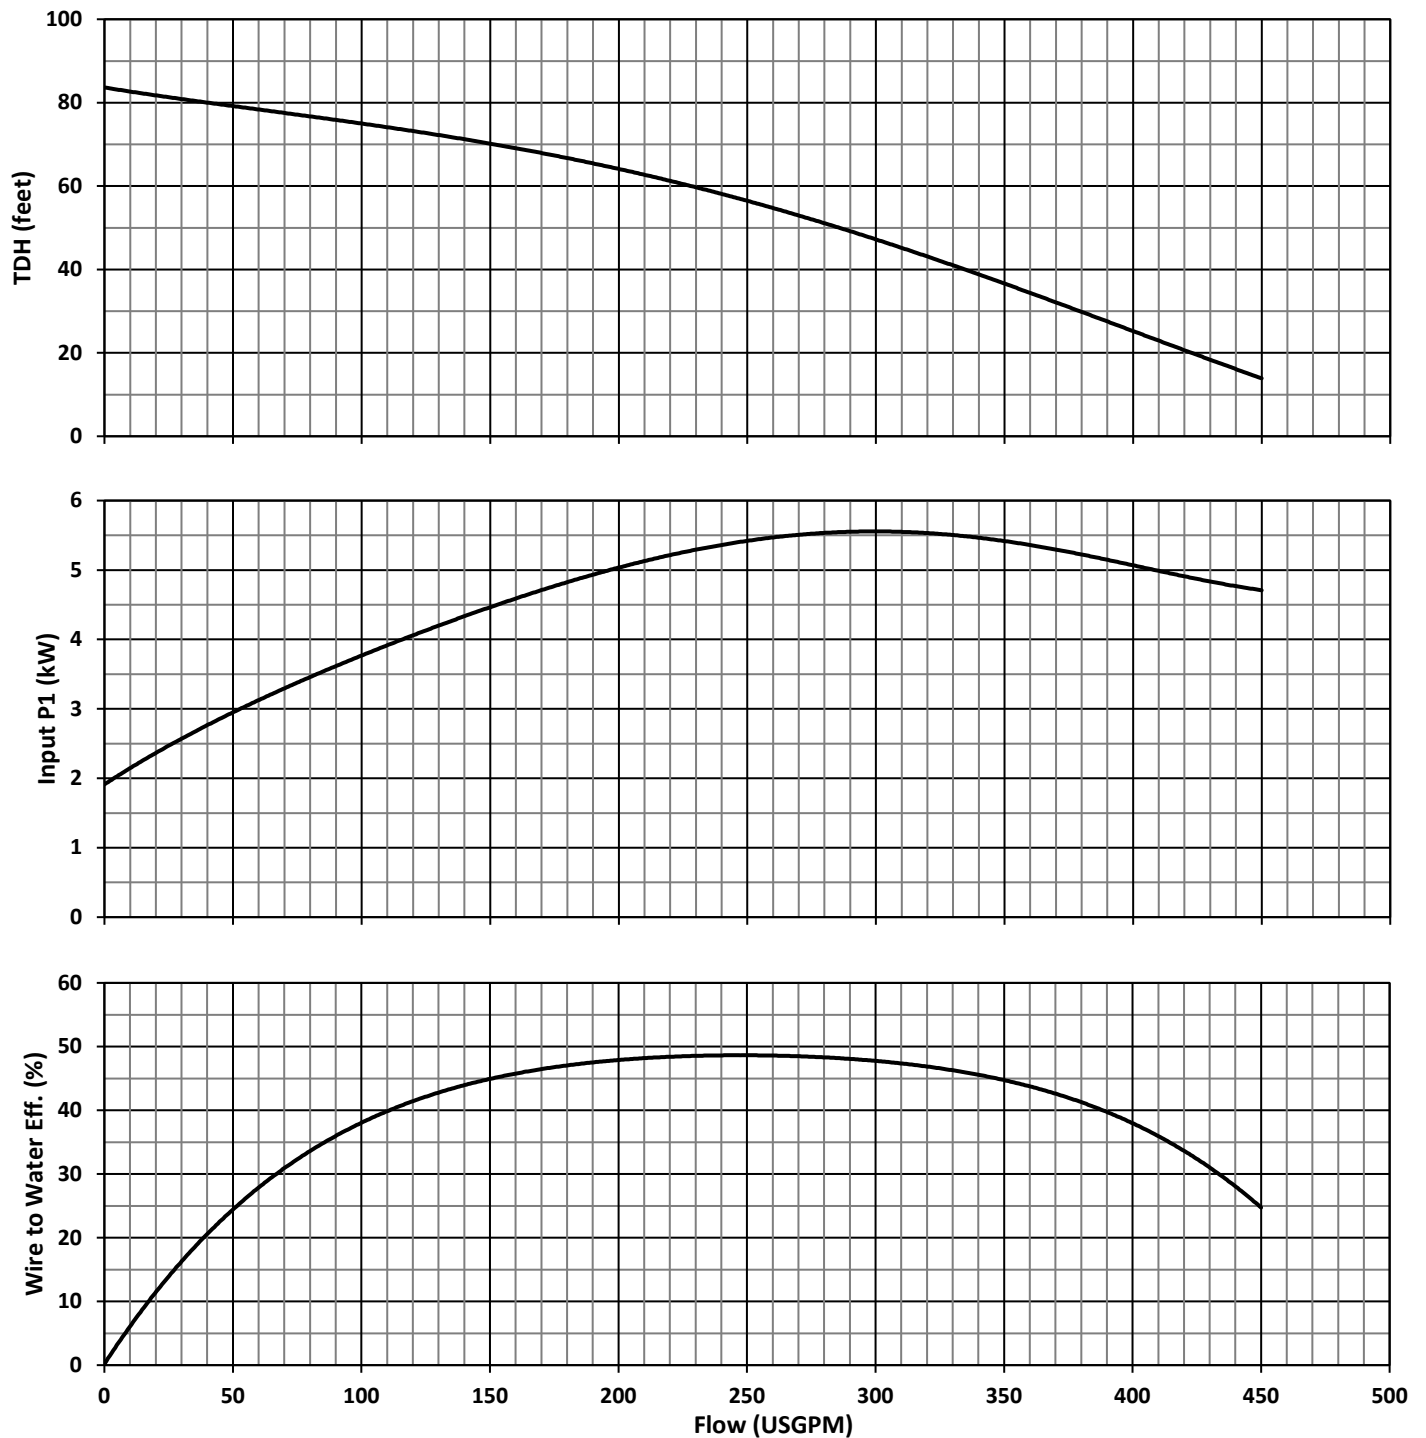

Pump Performance Test - US Units

Test Standard : HI 11.6 Gr 3B

Tested with water at 20°C

Frequency 60 Hz

Pump Speed 3450 RPM

Impeller Ø135mm

Specifications subject to change without notice