
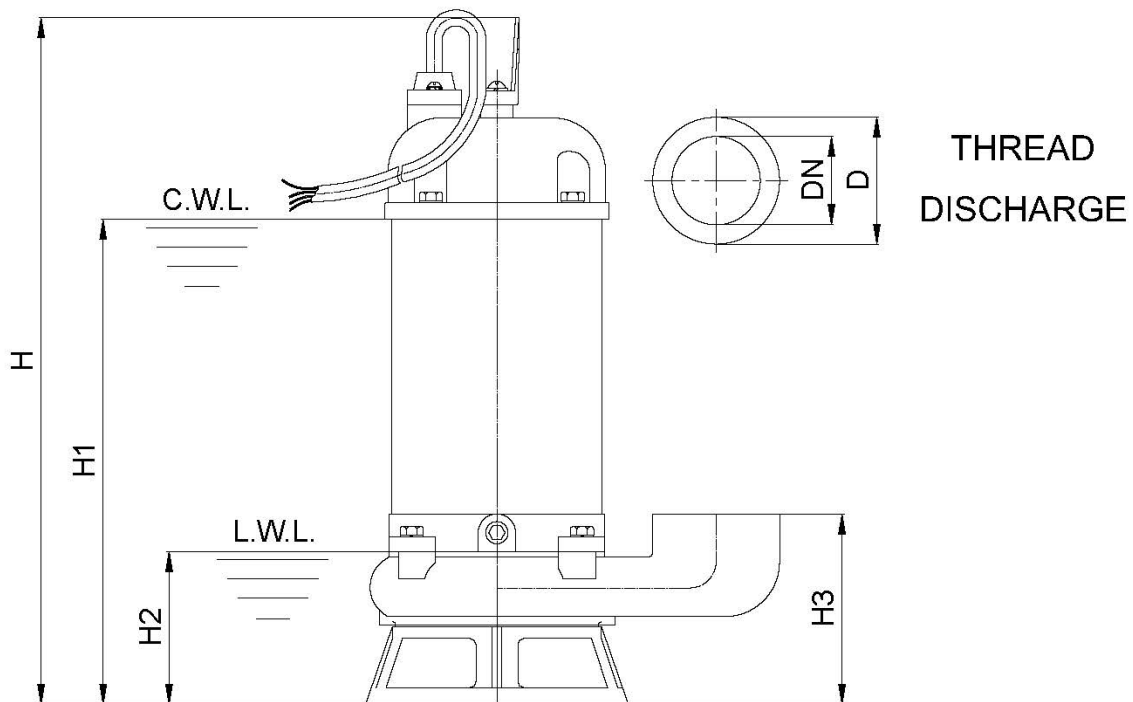


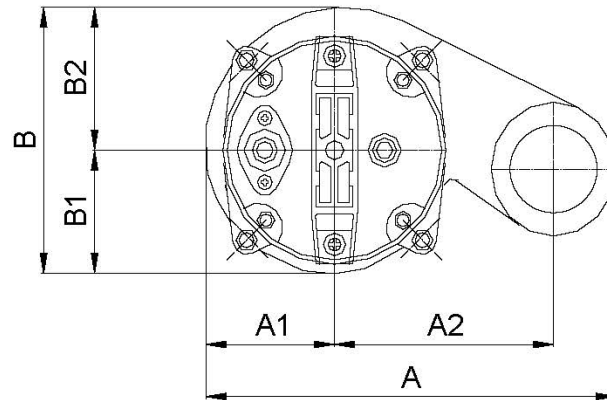

DIMENSIONS - INCH

WEIGHT: lb


MODEL	A	A1	A2	B	B1	B2	D	DN	H	H1	H2	H3	WT
SC-50	9.96	3.74	6.22	7.48	3.74	3.74	2.82	2	16.14	11.22	4.17	4.96	29.26
SC-100	9.96	3.74	6.22	7.48	3.74	3.74	2.82	2	18.90	13.11	4.17	4.96	41.80

C.W.L.:Continuous Running Water Level

WT: Pump Weight

L.W.L.:Lowest Running Water Level

Specifications subject to change without notice

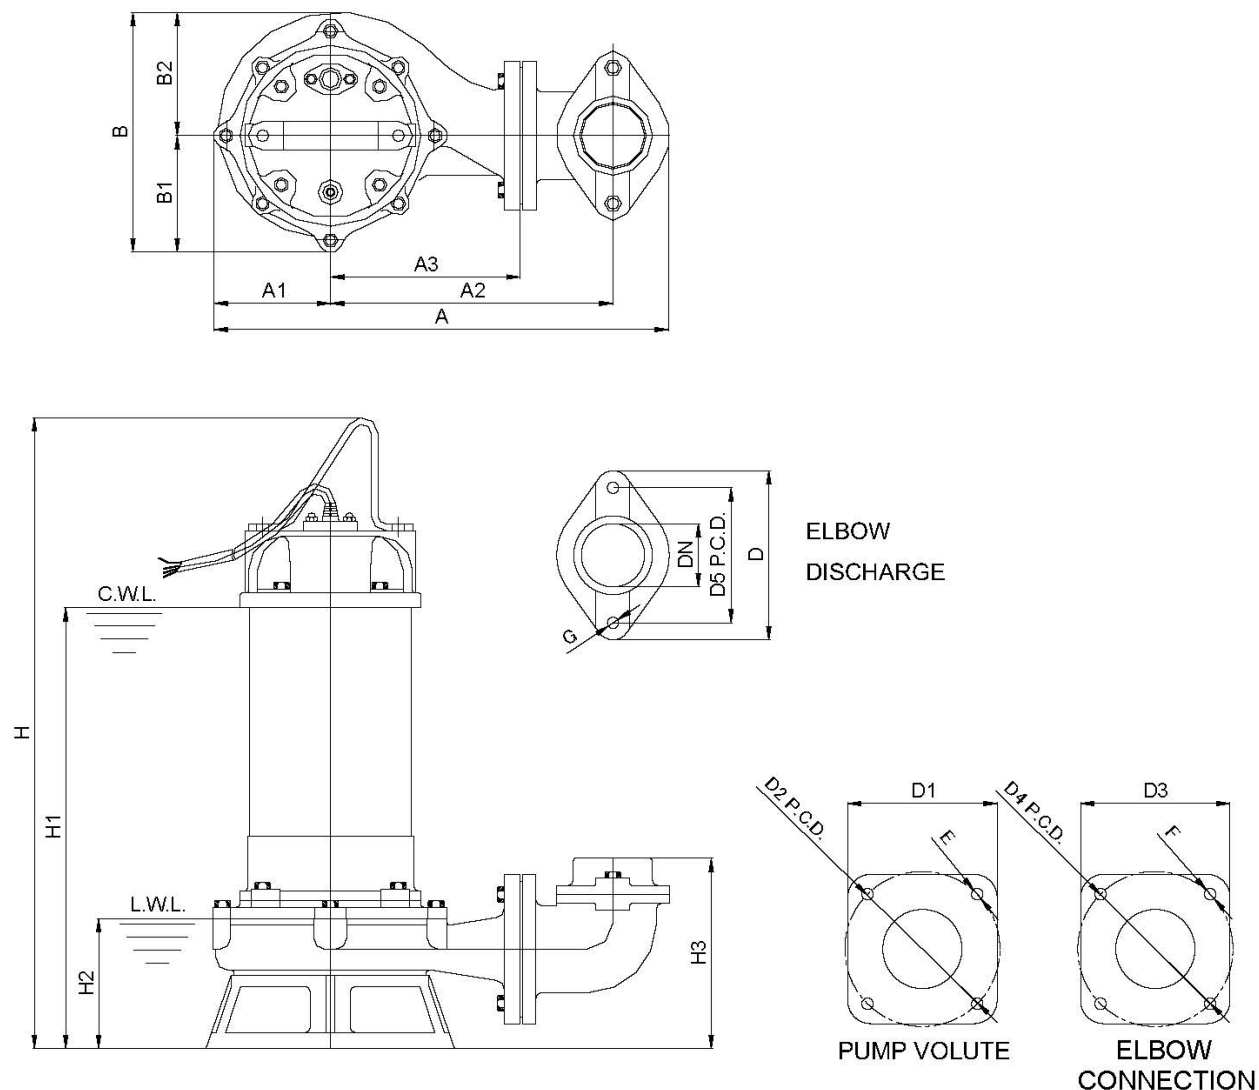

DIMENSIONS - INCH

WEIGHT: lb


MODEL	A	A1	A2	A3	B	B1	B2	D	D1	D2	D3	D4	D5	DN	E	F	G	H	H1	H2	H3	WT
SC-200	16.06	4.25	9.84	6.61	8.54	4.25	4.29	5.91	5.12	5.31	5.12	5.31	4.72	2	0.47	M10	M8	22.05	15.35	4.53	6.61	80.30
SC-200	16.06	4.25	9.84	6.61	8.54	4.25	4.29	5.91	5.12	5.31	5.12	5.31	4.72	3	0.47	M10	M8	22.05	15.35	4.53	6.61	80.30
SC-300	16.06	4.25	9.84	6.61	8.54	4.25	4.29	5.91	5.12	5.31	5.12	5.31	4.72	2	0.47	M10	M8	22.83	16.14	4.53	6.61	82.72
SC-300	16.06	4.25	9.84	6.61	8.54	4.25	4.29	5.91	5.12	5.31	5.12	5.31	4.72	3	0.47	M10	M8	22.83	16.14	4.53	6.61	80.30

C.W.L.:Continuous Running Water Level

WT: Pump Weight

L.W.L.:Lowest Running Water Level

Specifications subject to change without notice

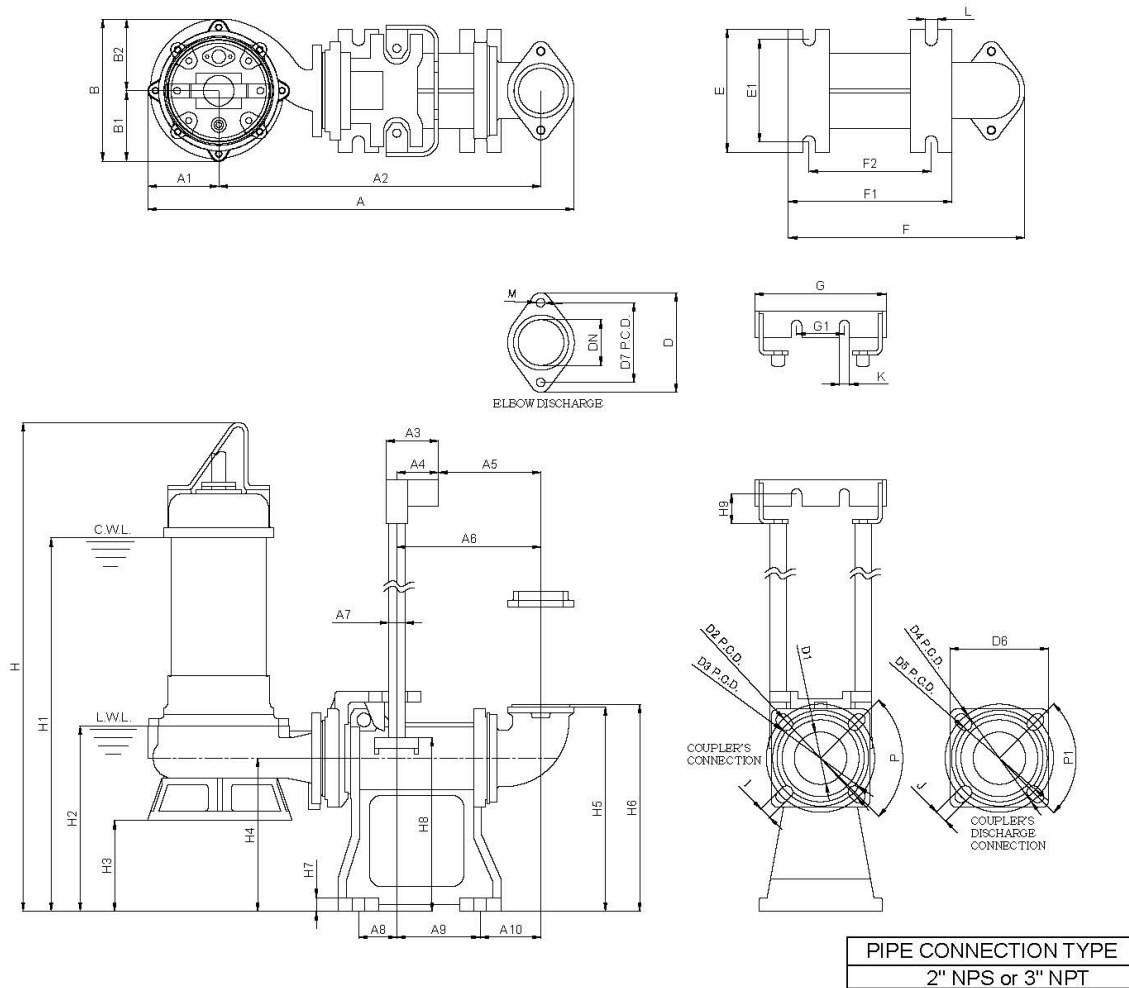

DIMENSIONS - INCH

WEIGHT: lb

MODEL	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	B	B1	B2	D	D1	D2	D3	D4	D5	D6	D7	DN	E	E1
SC-200	25.94	4.25	18.62	3.15	2.36	6.06	8.43	1	2.24	4.84	3.62	8.54	4.25	4.29	5.91	2.91	6.10	5.31	6.10	5.31	5.51	4.72	2	7.09	5.91
SC-200	25.94	4.25	18.62	3.15	2.36	6.06	8.43	1	2.24	4.84	3.62	8.54	4.25	4.29	5.91	2.91	6.10	5.31	6.10	5.31	5.51	4.72	3	7.09	5.91
SC-300	25.94	4.25	18.62	3.15	2.36	6.06	8.43	1	2.24	4.84	3.62	8.54	4.25	4.29	5.91	2.91	6.10	5.31	6.10	5.31	5.51	4.72	2	7.09	5.91
SC-300	25.94	4.25	18.62	3.15	2.36	6.06	8.43	1	2.24	4.84	3.62	8.54	4.25	4.29	5.91	2.91	6.10	5.31	6.10	5.31	5.51	4.72	3	7.09	5.91

MODEL	F	F1	F2	G	G1	H	H1	H2	H3	H4	H5	H6	H7	H8	H9	P	P1	I	J	K	L	M	WT	WT1
SC-200	13.78	9.45	7.09	7.52	2.76	27.36	20.67	9.37	4.92	7.95	9.92	10	0.79	8.07	0.87	90°	90°	0.71	0.71	0.59	0.71	0.47	80.30	30.58
SC-200	13.78	9.45	7.09	7.52	2.76	27.36	20.67	9.37	4.92	7.95	9.92	10	0.79	8.07	0.87	90°	90°	0.71	0.71	0.59	0.71	0.47	80.30	30.58
SC-300	13.78	9.45	7.09	7.52	2.76	28.15	21.46	9.37	4.92	7.95	9.92	10	0.79	8.07	0.87	90°	90°	0.71	0.71	0.59	0.71	0.47	82.72	30.58
SC-300	13.78	9.45	7.09	7.52	2.76	28.15	21.46	9.37	4.92	7.95	9.92	10	0.79	8.07	0.87	90°	90°	0.71	0.71	0.59	0.71	0.47	82.72	30.58

C.W.L.:Continuous Running Water Level


WT: Pump Weight

L.W.L.:Lowest Running Water Level

WT1: Q.D.C. Weight

Document valid only for pump with serial number 1327-001 and up.
Refer to previous document revision for earlier serial number.

Specifications subject to change without notice

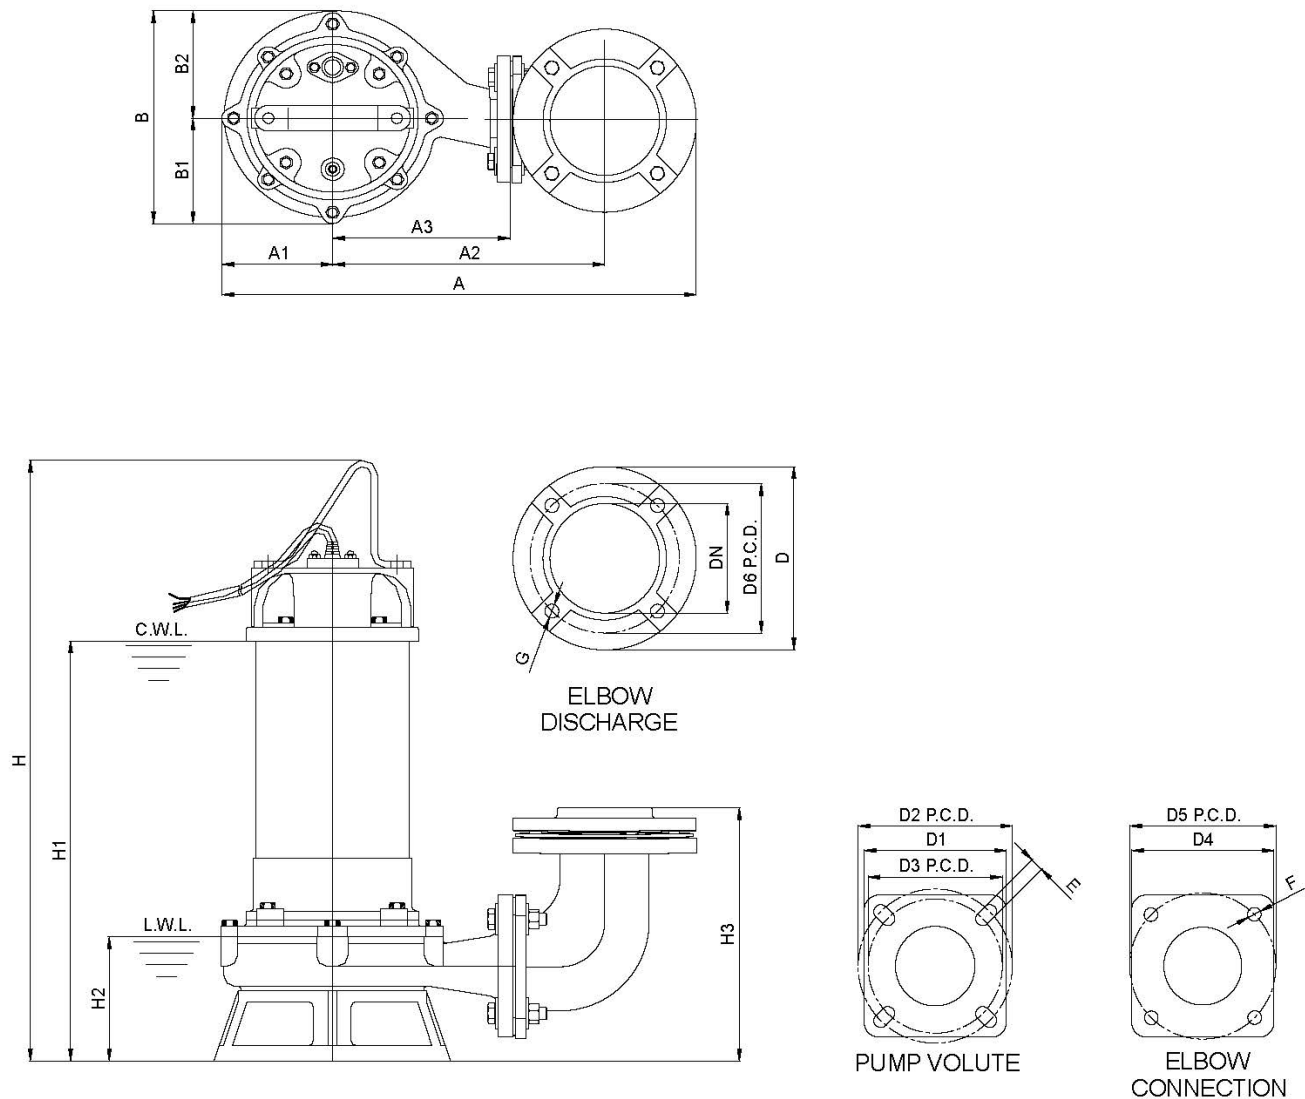

DIMENSIONS - INCH

WEIGHT: lb


MODEL	A	A1	A2	A3	B	B1	B2	D	D1	D2	D3	D4	D5	D6	DN	E	F	G	H	H1	H2	H3	WT
SC-500	17.99	4.33	10.04	6.57	8.94	4.33	4.61	7.24	5.75	6.10	5.31	5.75	5.91	5.91	3	0.51	M10	M8	24.02	16.14	5.39	8.86	127.60
SC-500	17.99	4.33	10.04	6.57	8.94	4.33	4.61	7.24	5.75	6.10	5.31	5.75	5.91	5.91	4	0.51	M10	M8	24.02	17.52	5.39	8.86	127.60
SC-750	17.99	4.33	10.04	6.57	8.94	4.33	4.61	7.24	5.75	6.10	5.31	5.75	5.91	5.91	3	0.51	M10	M8	25.59	17.52	5.39	8.86	127.60
SC-750	17.99	4.33	10.04	6.57	8.94	4.33	4.61	7.24	5.75	6.10	5.31	5.75	5.91	5.91	4	0.51	M10	M8	25.59	19.09	5.39	8.86	127.60

C.W.L.:Continuous Running Water Level

WT: Pump Weight

L.W.L.:Lowest Running Water Level

Specifications subject to change without notice

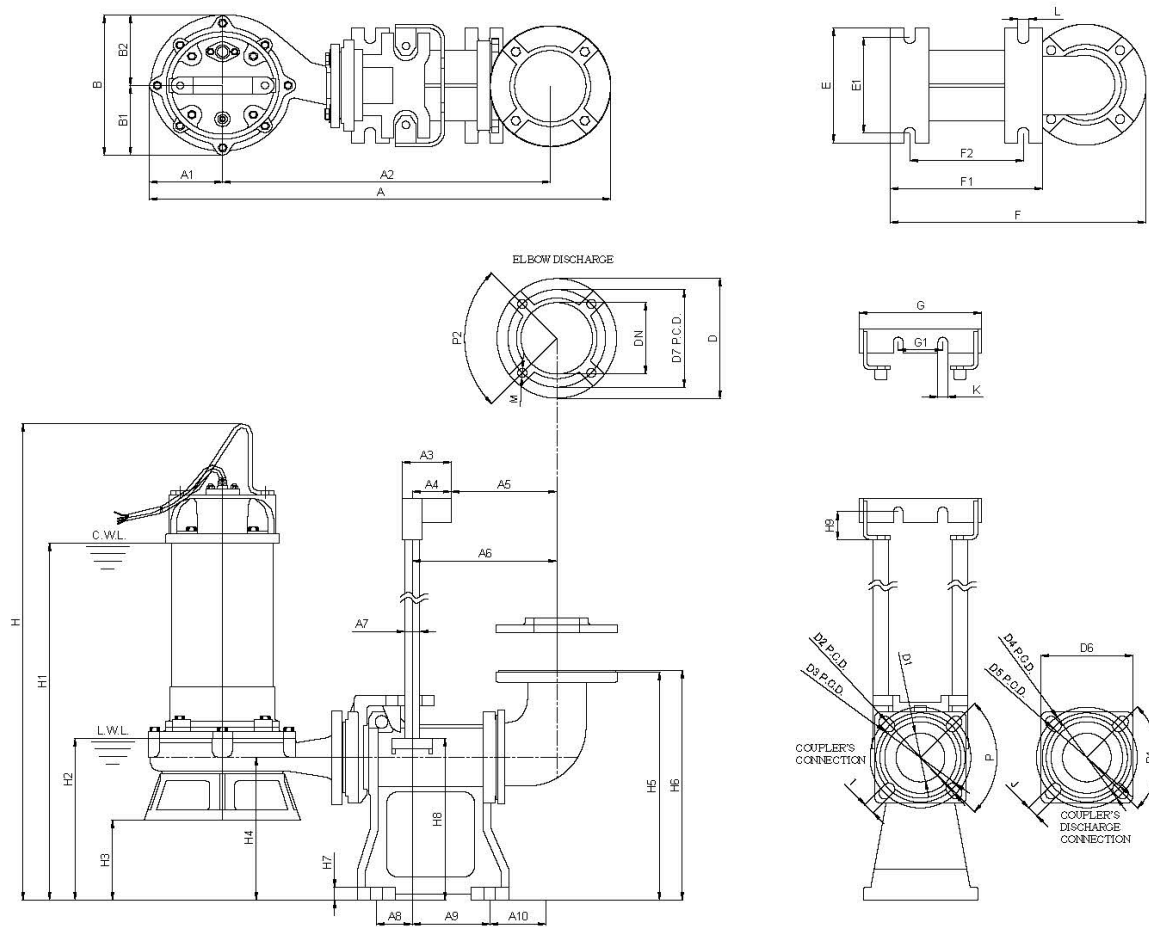

PIPE CONNECTION TYPE
3" or 4" NPT

DIMENSIONS - INCH

WEIGHT: lb

MODEL	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	B	B1	B2	D	D1	D2	D3	D4	D5	D6	D7	DN	E	E1
SC-500	27.17	4.33	18.98	3.15	2.36	6.34	8.70	1	2.24	4.84	3.86	8.94	4.33	4.61	7.24	2.91	6.10	5.31	6.10	5.31	5.51	5.91	3	7.09	5.91
SC-500	27.17	4.33	18.98	3.15	2.36	6.34	8.70	1	2.24	4.84	3.86	8.94	4.33	4.61	7.24	2.91	6.10	5.31	6.10	5.31	5.51	5.91	4	7.09	5.91
SC-750	27.17	4.33	18.98	3.15	2.36	6.34	8.70	1	2.24	4.84	3.86	8.94	4.33	4.61	7.24	2.91	6.10	5.31	6.10	5.31	5.51	5.91	3	7.09	5.91
SC-750	27.17	4.33	18.98	3.15	2.36	6.34	8.70	1	2.24	4.84	3.86	8.94	4.33	4.61	7.24	2.91	6.10	5.31	6.10	5.31	5.51	5.91	4	7.09	5.91

MODEL	F	F1	F2	G	G1	H	H1	H2	H3	H4	H5	H6	H7	H8	H9	P	P1	P2	I	J	K	L	M	WT	WT1
SC-500	13.78	9.45	7.09	7.52	2.76	30.12	23.11	9.37	4.92	7.95	12.36	12.42	0.79	8.07	0.87	90°	90°	90°	0.71	0.71	0.59	0.71	0.47	127.6	30.58
SC-500	13.78	9.45	7.09	7.52	2.76	30.12	23.11	9.37	4.92	7.95	12.36	12.42	0.79	8.07	0.87	90°	90°	90°	0.71	0.71	0.59	0.71	0.47	127.6	30.58
SC-750	13.78	9.45	7.09	7.52	2.76	31.69	24.69	9.37	4.92	7.95	12.36	12.42	0.79	8.07	0.87	90°	90°	90°	0.71	0.71	0.59	0.71	0.47	136.4	30.58
SC-750	13.78	9.45	7.09	7.52	2.76	31.69	24.69	9.37	4.92	7.95	12.36	12.42	0.79	8.07	0.87	90°	90°	90°	0.71	0.71	0.59	0.71	0.47	136.4	30.58

C.W.L.:Continuous Running Water Level

L.W.L.:Lowest Running Water Level

WT: Pump Weight

WT1: Q.D.C. Weight

Document valid only for pump with serial number 1327-001 and up.
Refer to previous document revision for earlier serial number.

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 • www.flowsolutions.com