

	TECHNICAL DATA	AVENGER SERIES	SSD-200
	Dwg: DS-A13-009	Rev: 5	Date: 4/23

MOTOR SPECIFICATIONS

Motor Design	Induction
Motor Type	Enclosed submersible
Insulation Class	Class B
Motor Protection	Bi-metallic Thermal Switch
Bi-Metallic Temp Trip	120° C ± 5° C
Service Factor	1.0
Voltage Tolerance	± 10% from nominal



MOTOR DATA, 60Hz

Model	Phase	Output Power BHP	Volts	Full Load Amps	Locked Rotor Amps	NEMA Code Letter	Power Factor 100% Load	Motor Efficiency 100% Load	Pole/Speed (rpm)
SSD-200	1	2	208	15.5	77.5	K	0.875	0.732	2/3450
	1	2	230	14	70	K	0.987	0.699	2/3450
	3	2	208	8.8	44	J	0.986	0.702	2/3450
	3	2	230	8	40	J	0.903	0.785	2/3450
	3	2	460	4	20	J	0.906	0.746	2/3450
	3	2	575	3.2	16	J	0.901	0.792	2/3450

MATERIALS OF CONSTRUCTION

Discharge Connection	Cast Iron (FC 15)
Motor Housing	AISI 304 Stainless Steel
Oil Chamber	Aluminum (ADC 12)
Volute	Cast Iron (FC 20)
External Hardware	AISI 304 Stainless Steel
O-Rings	NBR
Motor Shaft	Stainless Steel (410)
Upper Bearing	Single row, doubled sealed
Lower Bearing(s)	Single row, doubled sealed
Upper Shaft Seal	CA/CE (carbon/ceramic)
Lower Shaft Seal	SIC/SIC (silicon carbide/silicon carbide)
Impeller	Hytrell (steel coated with thermoplastic polyester elastomer)

DIMENSIONS, WEIGHT, AND MISC.




Pump weight single phase	53lbs (24kg)
Pump weight three phase	53lbs (24kg)
Maximum submergence	33 feet (10m)
Discharge size, standard	3-inch NPS male vertical
Maximum temp. of pumped fluid	104°F (40°C)
Inlet Opening	6mm

CABLE SPECIFICATIONS

MODEL	PHASE/VOLTAGE	POWER CABLE	LENGTH	OUTER JACKET
	1Ø 208V	SJTOW 14/3	50' (15m)	PVC
	1Ø 230V	SJTOW 14/3	50' (15m)	PVC
	3Ø 208V	STOW 16/4	50' (15m)	PVC
	3Ø 230V	STOW 16/4	50' (15m)	PVC
	3Ø 460V	STOW 16/4	50' (15m)	PVC

Power cable suitable for all standard voltages listed in "MOTOR DATA" section.
 Document valid only for pump with serial number 1327-001 and up.
 Refer to previous document revision for earlier serial number.

Specifications subject to change without notice

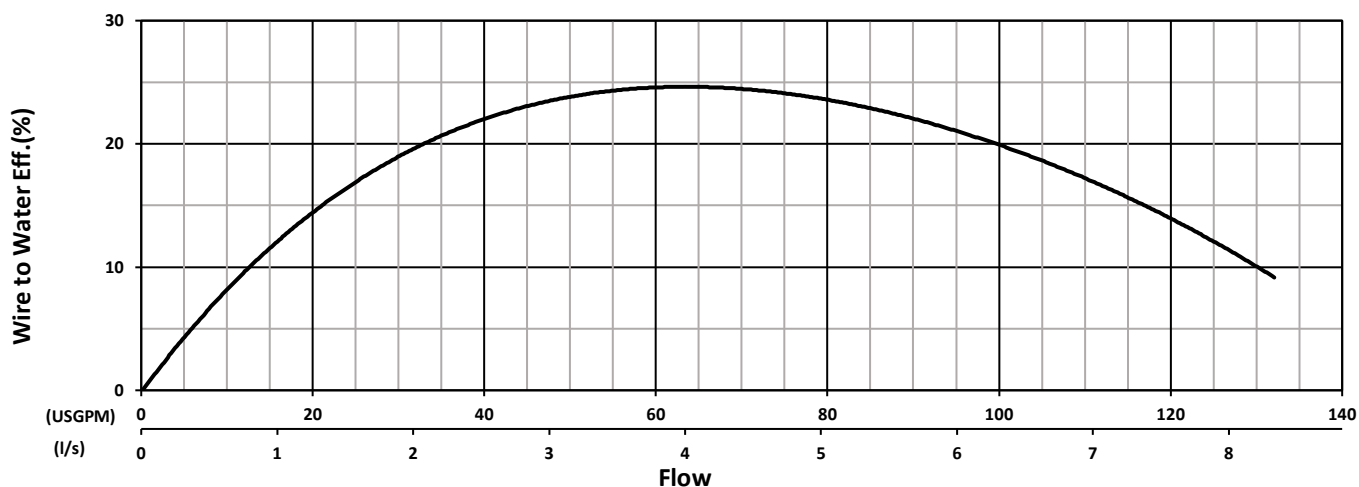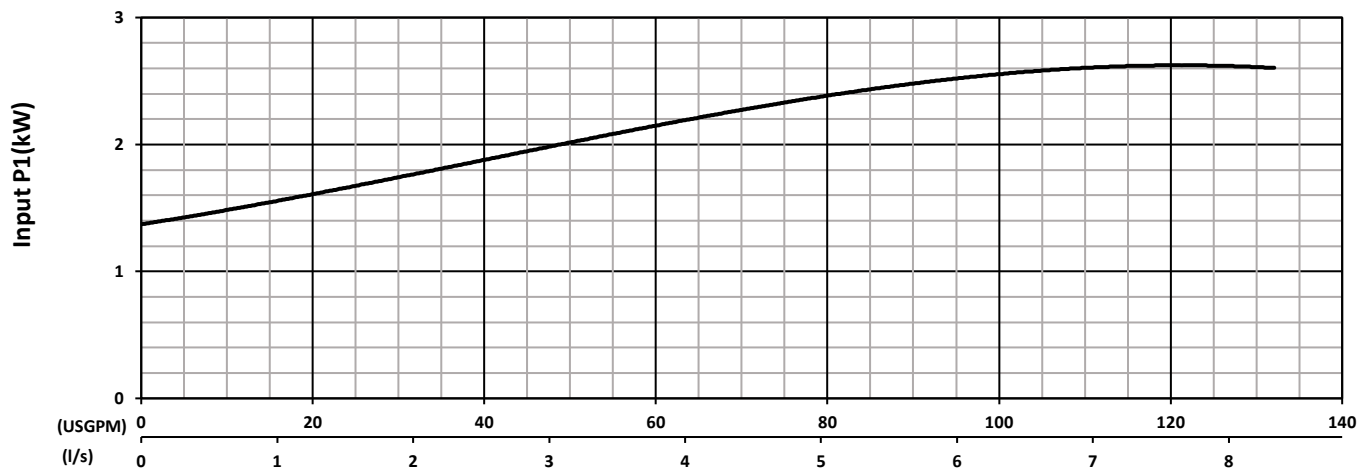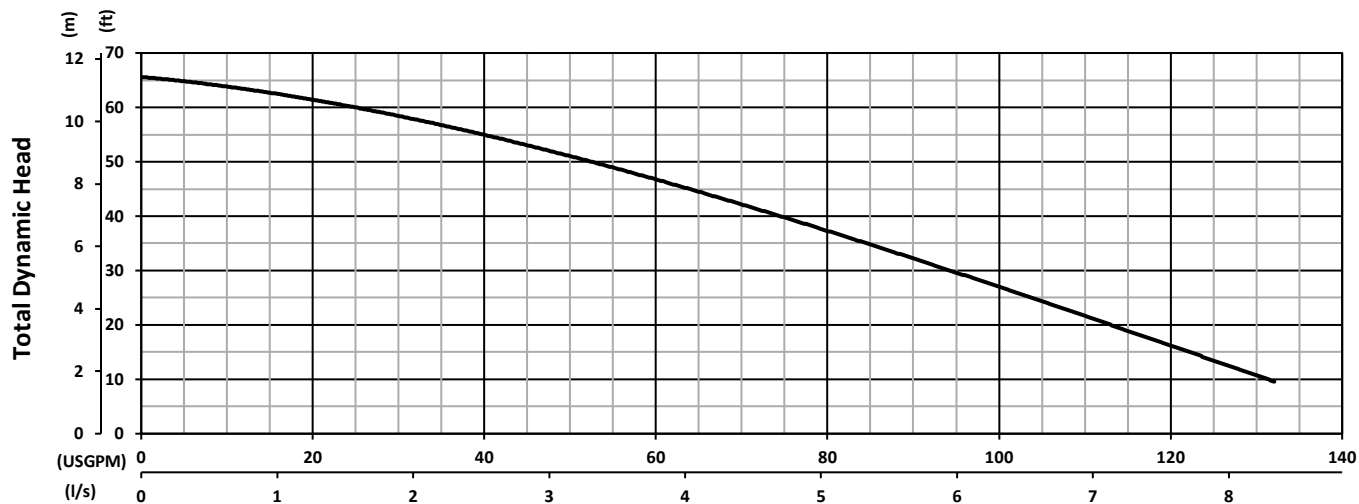

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

Pump Performance Test - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller Ø123mm

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 • www.flowsolutions.com