


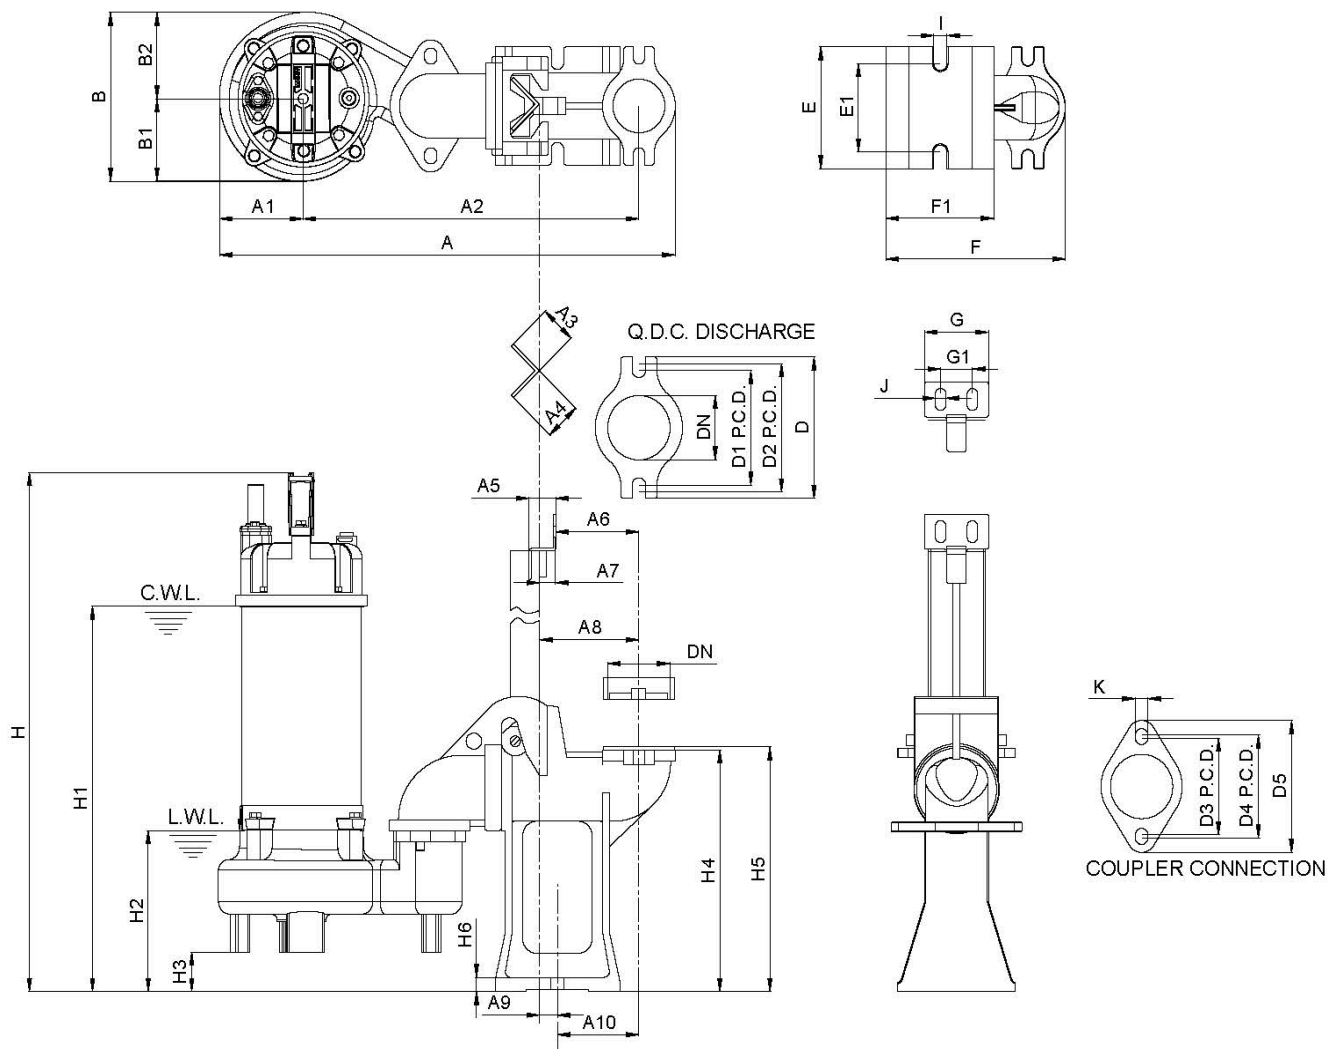

PIPE CONNECTION TYPES	
PT	NPT

DIMENSIONS - INCH

WEIGHT: lb

MODEL	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	B	B1	B2	D	D1	D2	D3	D4	D5
SS-50	16.34	2.95	12.36	1.57	1.57	1.46	3.07	0.59	3.74	0.67	3.07	2.76	3.15	5.91	4.33	3.31	3.54	3.54	3.86	4.8
SS-100	16.34	2.95	12.36	1.57	1.57	1.46	3.07	0.59	3.74	0.67	3.07	2.76	3.15	5.91	4.33	3.31	3.54	3.54	3.86	4.8

MODEL	DN	E	E1	F	F1	G	G1	H	H1	H2	H3	H4	H5	H6	I	J	K	WT	WT1
SS-50	2	4.33	3.15	4.21	4.76	2.36	1.18	17.52	12.68	5.59	1.04	8.9	8.98	0.35	0.51	0.39	0.45	29.04	14.08
SS-100	2	4.33	3.15	4.21	4.76	2.36	1.18	18.7	13.86	5.59	1.04	8.9	8.98	0.35	0.51	0.39	0.45	39.6	14.08

C.W.L.:Continuous Running Water Level

L.W.L.:Lowest Running Water Level


WT: Pump Weight

WT1: Q.D.C. Weight

Specifications subject to change without notice

	Dimensions	AVENGER SERIES	SS-50A
Dwg:	DS-A07-033	Rev:	Date: 11/17


SS-50A

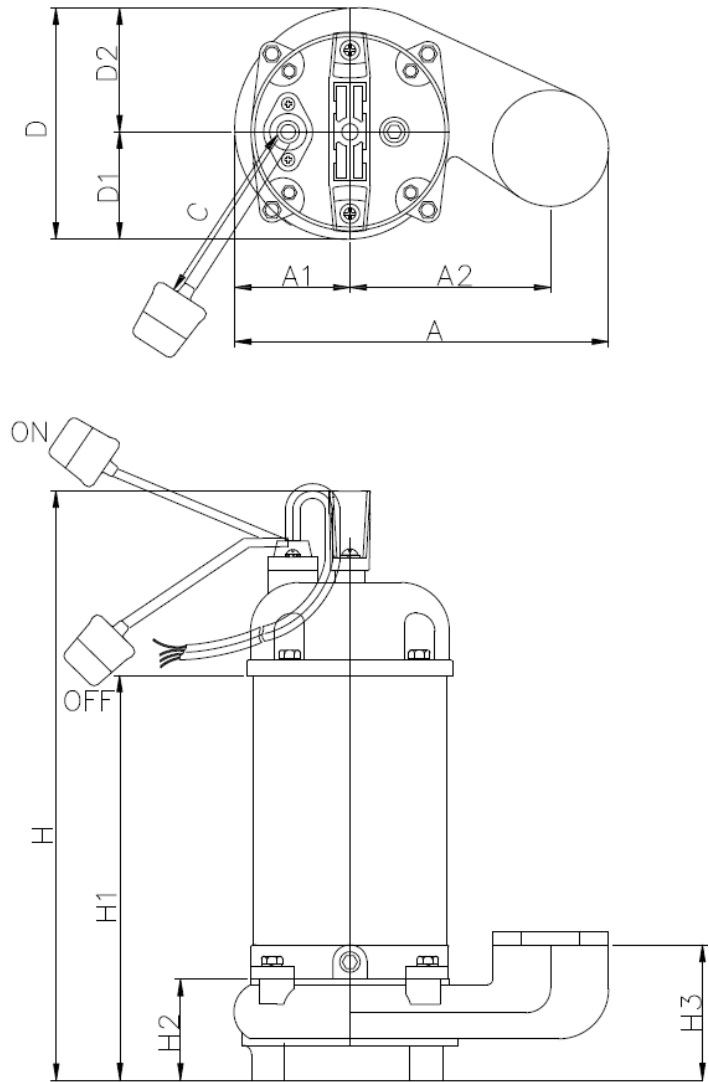

Type	Discharge	A	A1	A2	C	D	D1	D2	H	H1	H2	H3
Dimensions	2" NPT Female	8.98"	2.88"	6.11"	7.75"	5.91"	2.72"	3.19"	16.20"	11.70"	4.61"	4.4"


Specifications subject to change without notice

SS-100A

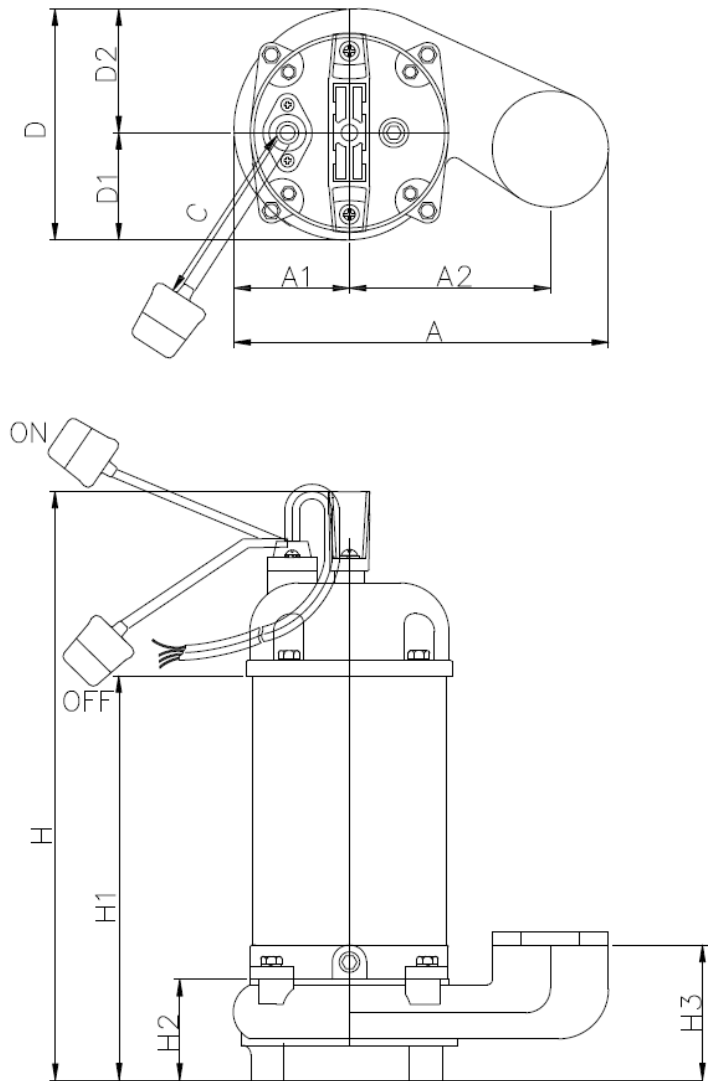

Type	DISCHARGE	A	A1	A2	C	D	D1	D2	H	H1	H2	H3
INCHES	2"	8.98"	2.87"	6.1"	15.5"	5.91"	2.72"	3.19"	16.2"	11.7"	4.61"	5.43"

Specifications subject to change without notice

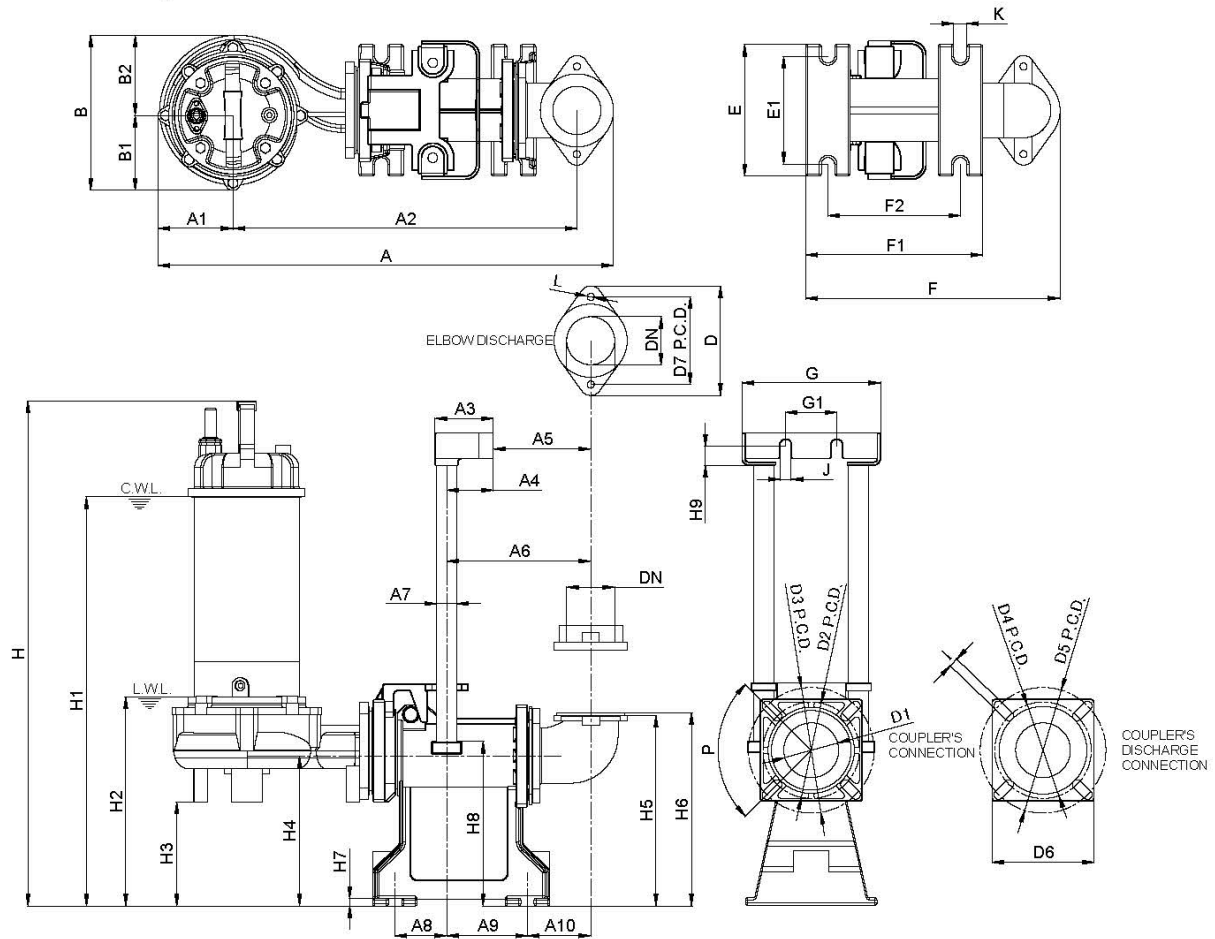

PIPE CONNECTION TYPES	
PT	NPT

DIMENSIONS - INCH

WEIGHT: lb

MODEL	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	B	B1	B2	D	D1	D2	D3	D4	D5	D6	D7	DN	P
SS-200	24.02	4.09	17.91	3.07	2.44	5.28	7.72	1	2.83	4.29	3.43	8.19	4.09	4.09	5.91	2.91	5.31	6.77	5.31	6.77	5.51	4.72	2	90°
SS-200	24.02	4.09	17.91	3.07	2.44	5.28	7.72	1	2.83	4.29	3.43	8.19	4.09	4.09	5.91	2.91	5.31	6.77	5.31	6.77	5.51	4.72	3	90°
SS-300	24.02	4.09	17.91	3.07	2.44	5.28	7.72	1	2.83	4.29	3.43	8.19	4.09	4.09	5.91	2.91	5.31	6.77	5.31	6.77	5.51	4.72	2	90°
SS-300	24.02	4.09	17.91	3.07	2.44	5.28	7.72	1	2.83	4.29	3.43	8.19	4.09	4.09	5.91	2.91	5.31	6.77	5.31	6.77	5.51	4.72	3	90°

MODEL	E	E1	F	F1	F2	G	G1	H	H1	H2	H3	H4	H5	H6	H7	H8	H9	I	J	K	L	WT	WT1
SS-200	7.09	5.91	13.78	9.45	7.13	7.48	2.76	25.98	21.02	9.96	5.28	8.07	9.69	9.8	0.39	8.66	1.02	0.55	0.59	0.71	0.39	76.34	30.58
SS-200	7.09	5.91	13.78	9.45	7.13	7.48	2.76	25.98	21.02	9.96	5.28	8.07	9.69	9.8	0.39	8.66	1.02	0.55	0.59	0.71	0.39	76.34	30.58
SS-300	7.09	5.91	13.78	9.45	7.13	7.48	2.76	27.17	21.81	9.96	5.28	8.07	9.69	9.8	0.39	8.66	1.02	0.55	0.59	0.71	0.39	78.76	30.58
SS-300	7.09	5.91	13.78	9.45	7.13	7.48	2.76	27.17	21.81	9.96	5.28	8.07	9.69	9.8	0.39	8.66	1.02	0.55	0.59	0.71	0.39	78.76	30.58


C.W.L.:Continuous Running Water Level

L.W.L.:Lowest Running Water Level

WT: Pump Weight

WT1: Q.D.C. Weight

Specifications subject to change without notice

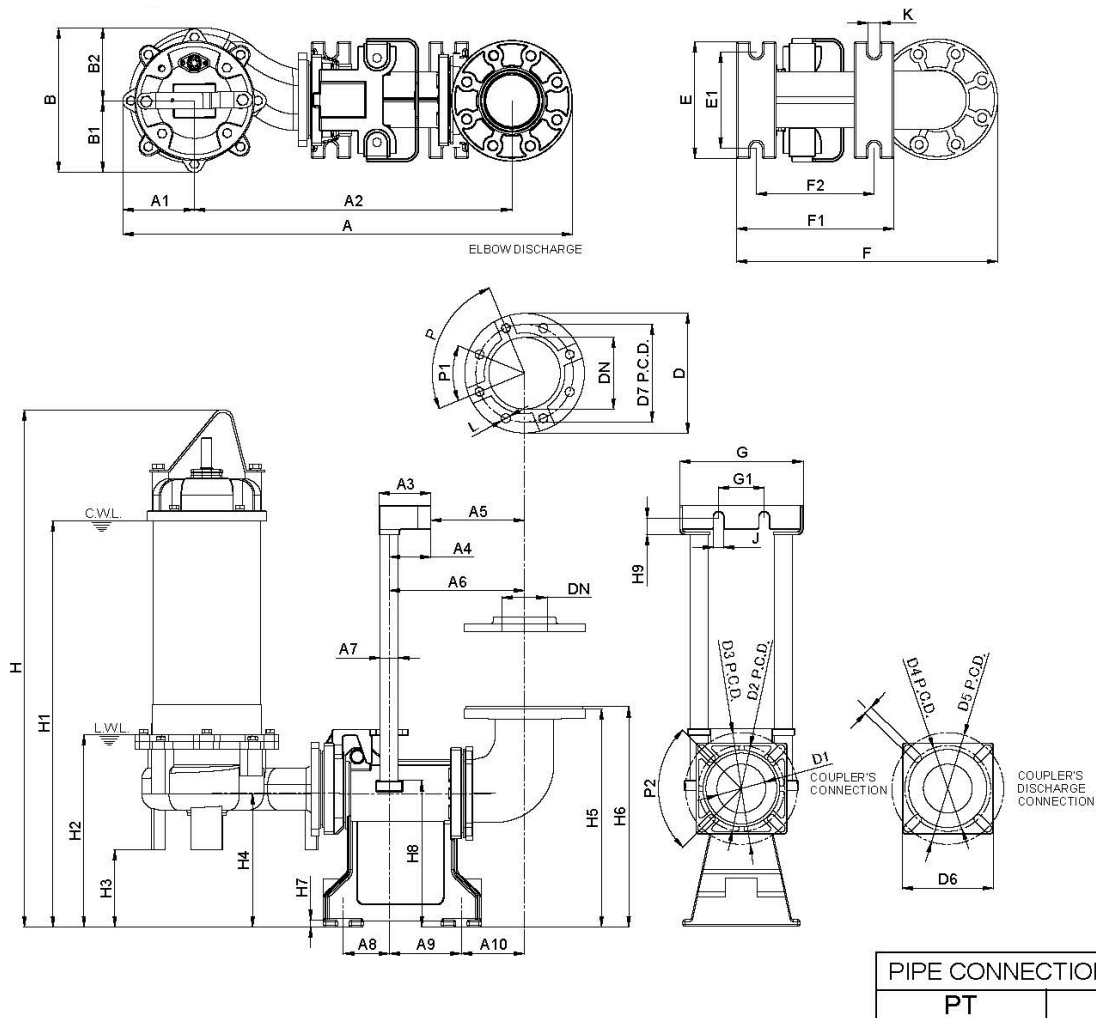

DIMENSIONS - INCH

WEIGHT: lb

MODEL	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	B	B1	B2	D	D1	D2	D3	D4	D5	D6	D7	DN	P
SS-500	26.97	3.94	19.17	3.07	2.44	5.71	8.07	1	2.83	4.29	3.78	8.27	3.74	4.53	7.24	2.91	5.31	6.77	5.31	6.77	5.51	5.91	3	90°
SS-500	26.97	3.94	19.17	3.07	2.44	5.71	8.07	1	2.83	4.29	3.78	8.27	3.74	4.53	7.24	2.91	5.31	6.77	5.31	6.77	5.51	5.91	4	90°
SS-750	26.97	3.94	19.17	3.07	2.44	5.71	8.07	1	2.83	4.29	3.78	8.27	3.74	4.53	7.24	2.91	5.31	6.77	5.31	6.77	5.51	5.91	3	90°
SS-750	26.97	3.94	19.17	3.07	2.44	5.71	8.07	1	2.83	4.29	3.78	8.27	3.74	4.53	7.24	2.91	5.31	6.77	5.31	6.77	5.51	5.91	4	90°

MODEL	P1	P	E	E1	F	F1	F2	G	G1	H	H1	H2	H3	H4	H5	H6	H7	H8	H9	I	J	K	L	WT	WT1
SS-500	45°	90°	7.09	5.91	15.94	9.45	7.13	7.48	2.76	29.09	22.6	10.47	4.17	8.07	12.4	12.48	0.39	8.66	1.02	0.55	0.59	0.71	0.55	123.2	30.58
SS-500	45°	90°	7.09	5.91	15.94	9.45	7.13	7.48	2.76	29.09	22.6	10.47	4.17	8.07	12.4	12.48	0.39	8.66	1.02	0.55	0.59	0.71	0.55	123.2	30.58
SS-750	45°	90°	7.09	5.91	15.94	9.45	7.13	7.48	2.76	30.67	24.17	10.47	4.17	8.07	12.4	12.48	0.39	8.66	1.02	0.55	0.59	0.71	0.55	136.4	30.58
SS-750	45°	90°	7.09	5.91	15.94	9.45	7.13	7.48	2.76	30.67	24.17	10.47	4.17	8.07	12.4	12.48	0.39	8.66	1.02	0.55	0.59	0.71	0.55	136.4	30.58

C.W.L.:Continuous Running Water Level
L.W.L.:Lowest Running Water Level

WT: Pump Weight
WT1: Q.D.C. Weight