

MOTOR SPECIFICATIONS

Motor Design	Induction
Motor Type	Enclosed submersible
Insulation Class	Class F
Motor Protection	Bi-metallic Thermal Switch
Bi-Metallic Temp Trip	120° C ± 5° C
Service Factor	1.15
Voltage Tolerance	± 10% from nominal



MOTOR DATA, 60Hz

Model	Phase	Output Power BHP	Volts	Full Load Amps	Locked Rotor Amps	NEMA Code Letter	Power Factor 100% Load	Motor Efficiency 100% Load	Pole/Speed (rpm)
WCP 1100 HH	3	11	230	33.1	165.5	G	0.86	0.87	2/3450
	3	11	460	16.5	82.5	G	0.87	0.88	2/3450
	3	11	575	13.3	67.5	G	0.88	0.87	2/3450

MATERIALS OF CONSTRUCTION

Upper Motor Lid	Cast iron
Motor Housing	AISI 304 Stainless Steel
Oil Chamber	Cast iron
Volute	Cast iron
External Hardware	AISI 304 Stainless Steel
O-Rings	NBR
Motor Shaft	AISI Stainless Steel 410 (in pumped media)
Upper Bearing	C3 Shielded ball bearings
Lower Bearing(s)	C3 Shielded ball bearings
Upper Shaft Seal	CA/CE (carbon/ceramic)
Lower Shaft Seal	SIC/SIC (silicon carbide/silicon carbide)
Impeller	High Chrome Iron

DIMENSIONS, WEIGHT, AND MISC.

Pump weight single phase	203lbs (92kg)
Pump weight three phase	203lbs (92kg)
Maximum submergence	66 feet (20m)
Discharge size, standard	3-inch NPT male vertical
Maximum temp. of pumped fluid	104°F (40°C)
Free Passage size	0.3" (7mm)

CABLE SPECIFICATIONS

MODEL	PHASE/VOLTAGE	POWER CABLE	LENGTH	OUTER JACKET
WCP 1100 HH	3Ø-230V	8/3 G-GC	100 feet (30.48m)	PVC
	3Ø-460V	8/3 G-GC	100 feet (30.48m)	PVC
	3Ø-575V	8/3 G-GC	100 feet (30.48m)	PVC

Power cable suitable for all standard voltages listed in "MOTOR DATA" section.






PERFORMANCE CURVE

WCP 1100 HH

Dwg: DS-A28-007

Rev: --

Date: 2/19/2018

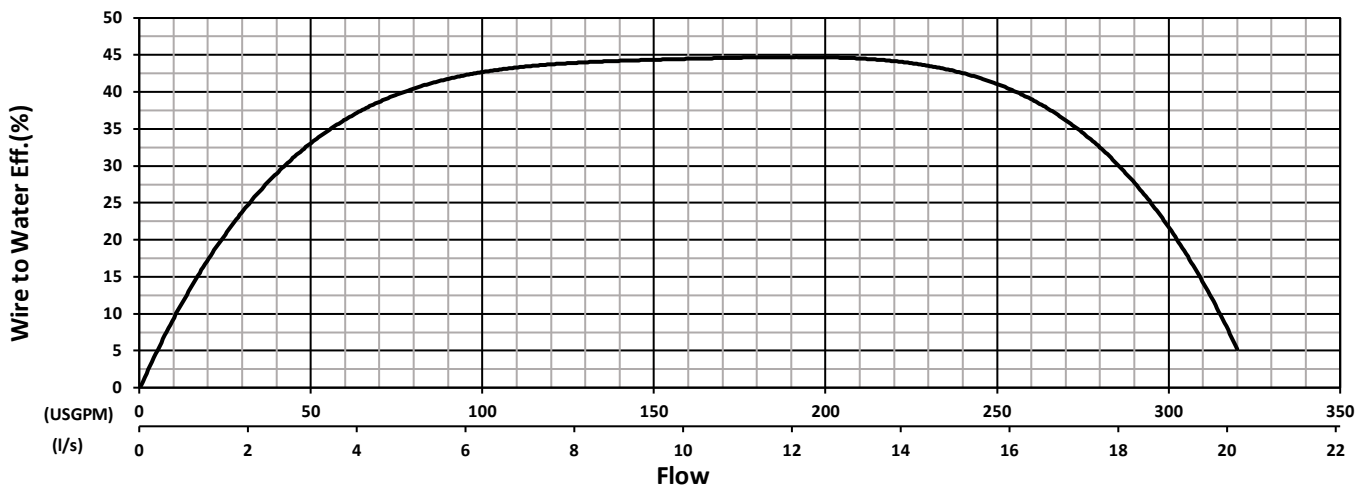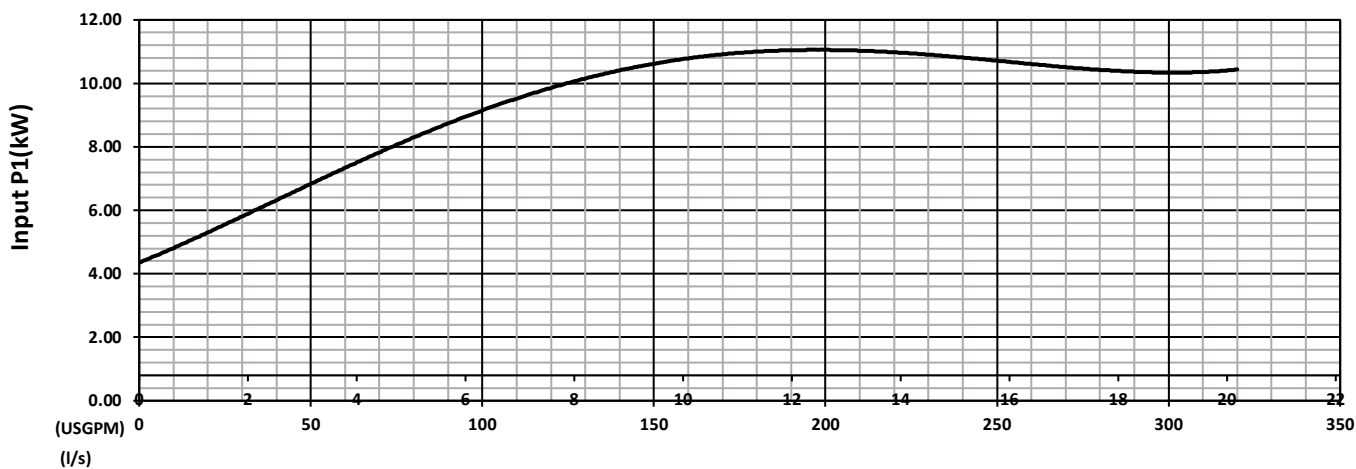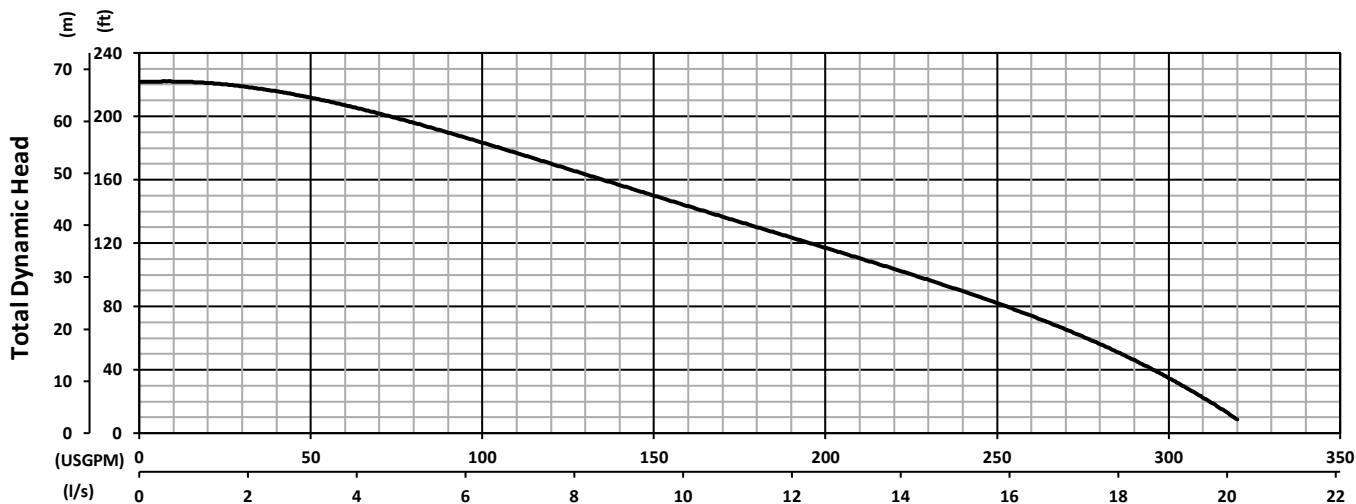

Test Standard : HI 11.6 Gr 3B
 Tested with water at 20°C

Pump Performance Test - Dual Units

Frequency 60 Hz
 Pump Speed 3450 RPM
 Impeller Ø156mm

Specifications subject to change without notice