

TECHNICAL DATA
MODEL JX15HSS
BJM Pumps® SUBMERSIBLE PUMP - CAST IRON
GENERAL DATA



208/230/460/575V

MAX. FLOW: GPM (L/min)	105 GPM (397 L/min)
MAX. HEAD: ft (m)	75' (22.8 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SUMP, SIDE DISCHARGE
MINIMUM SUBMERSION DEPTH: in(mm)	9.5" (241 mm)
SOLID SIZE: in (mm)	3/16" (4.7 mm)
STRAINER OPENING	0.5625"x0.25" (14.3x6.3 mm) slot
IMPELLER DIAMETER: in (mm)	5" (128 mm)
DISCHARGE SIZE	2" NPT-MALE
PUMP WEIGHT, without cable: lbs (kg)	60 lbs (27.3 kg)
SHIPPING WEIGHT: lbs (kg)	69 lbs (31.4 kg)

CONSTRUCTION / MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/CERAMIC
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE
MOTOR CASING	304 SS
PUMP VOLUTE	CAST IRON
IMPELLER- MULTI VANE	CAST IRON
STRAINER	304 SS
LIPSEAL & O-RINGS	BUNA-N
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN SEAL CHAMBER	9 U.S. FL. OZ. (265 C.C.)
QTY. OIL IN MOTOR STATOR	No oil in motor stator (After ser# 42043). 13.5 U.S. FL. OZ. (400 C.C.) (Before ser# 42043).
BALL BEARING: PERM. LUBE. UPPER	6203
BALL BEARING: PERM. LUBE. LOWER	6304

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 2 (CONTINUOUS DUTY ³)			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE ¹ - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	6.3	6	3	2.3
LOCKED ROTOR CURRENT (LRA)	44.6	44	22	15.5
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD			
POWER CORD: GAGE; LENGTH	A.W.G. 16/4; 33' (10 m), STOW			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			
SEAL LEAK DETECTOR ² (OPTIONAL)	Seal Minder®; MOISTURE SENSING PROBE			

1- Available in other voltages (and in 50 Hz).

2- Requires a seal fail circuit in control panel for warning signal.

3 - Continuous duty motor – see minimum submersion depth at General Data table above.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive


New Haven, CT. 06513, USA

Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

MODEL: JX15HSS

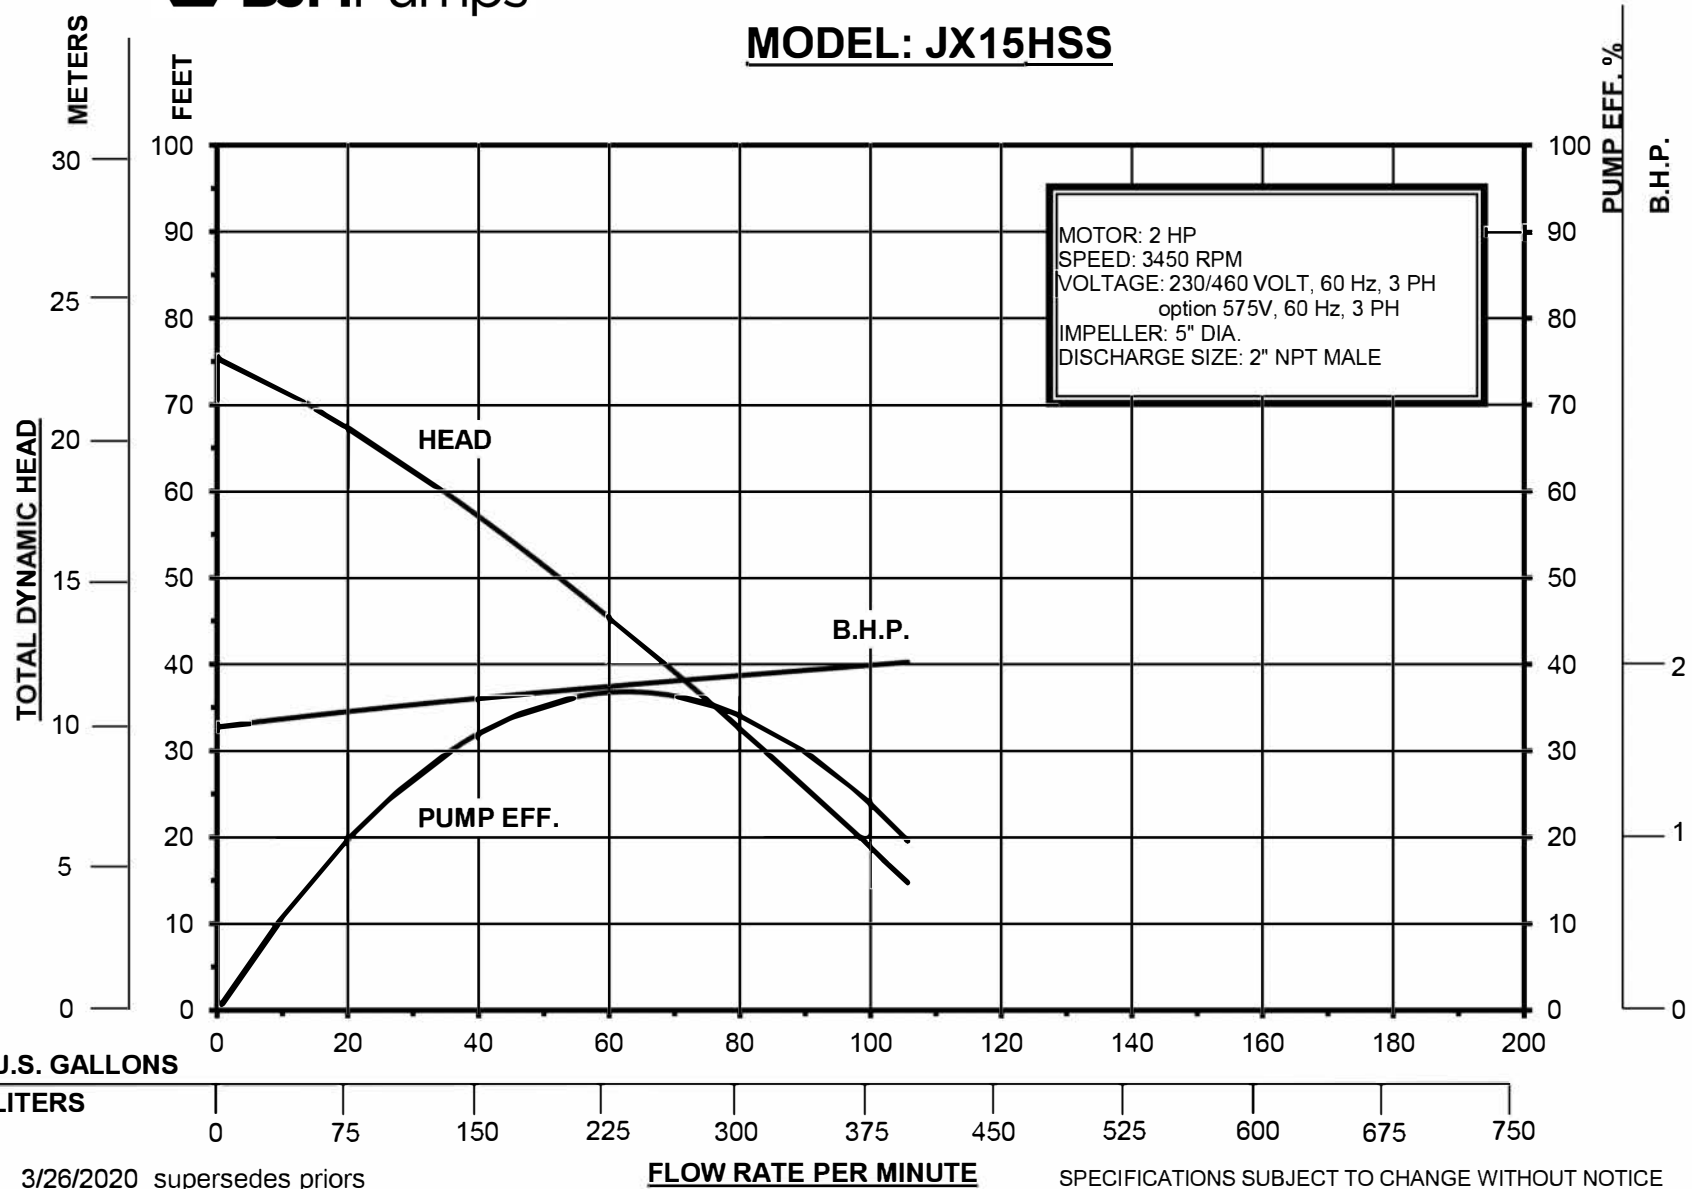

MOTOR: 2 HP
 SPEED: 3450 RPM
 VOLTAGE: 230/460 VOLT, 60 Hz, 3 PH
 option 575V, 60 Hz, 3 PH
 IMPELLER: 5" DIA.
 DISCHARGE SIZE: 2" NPT MALE

3/26/2020 supersedes priors

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE