

Visit our website: www.flowsolutions.com

TECHNICAL DATA
MODEL HAZ55CH
MSHA APPROVED PUMP AND CONTROL ASSEMBLY
HEAVY DUTY SLURRY PUMP – CHROME IRON / HARDENED DUCTILE IRON

GENERAL DATA

MAX. FLOW: GPM (L/min)	449 GPM (1699 L/min)
MAX. HEAD: ft (m)	69' (21 m)
PUMP TYPE	SLURRY HANDLING
SOLID SIZE: in (mm)	1" (25.4 mm)
STRAINER OPENING: in (mm)	1.375" (34.9 mm)
PUMP DOWN WATER LEVEL: in (mm)	12" (305 mm)
IMPELLER DIAMETER: in (mm)	10.82" (275 mm)
DISCHARGE SIZE	3" NPT-MALE
SHIPPING WEIGHT: lbs (kg)	Approx. 440 lbs. (200 kg)

CONSTRUCTION / MATERIAL DATA

DUAL MECHANICAL SEALS	SILICON CARBIDE/SILICON CARBIDE
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	MULTI VANE, HI-CHROME
STRAINER/STAND	STEEL
LIP SEALS & O-RINGS	BUNA-N
ROTOR SHAFT	410 SS
QTY. OIL IN SEAL CHAMBER	49 U.S. FL. OZ. (1450 C.C.)
BALL BEARING: PERM. LUBE. UPPER	6306
BALL BEARING: PERM. LUBE. LOWER	6308

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 7.5 (CONTINUOUS DUTY)		
MOTOR RPM	1750		
MOTOR INSULATION CLASS	H		
MOTOR SERVICE FACTOR	1.15		
VOLTAGE - 3 PH, 60 Hz	230V	460V	575V
CURRENT F.L.A.	19.5	9.5	7.8
LOCKED ROTOR CURRENT (LRA)	130	65	48
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD		
POWER CORD: GAGE; LENGTH	A.W.G. 10/5; 50' (15.2m), SOOW, MSHA listed		
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)		

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.


104 John W Murphy Drive
 New Haven, CT. 06513, USA
 Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



BJM Pumps

MODEL: HAZ55CH

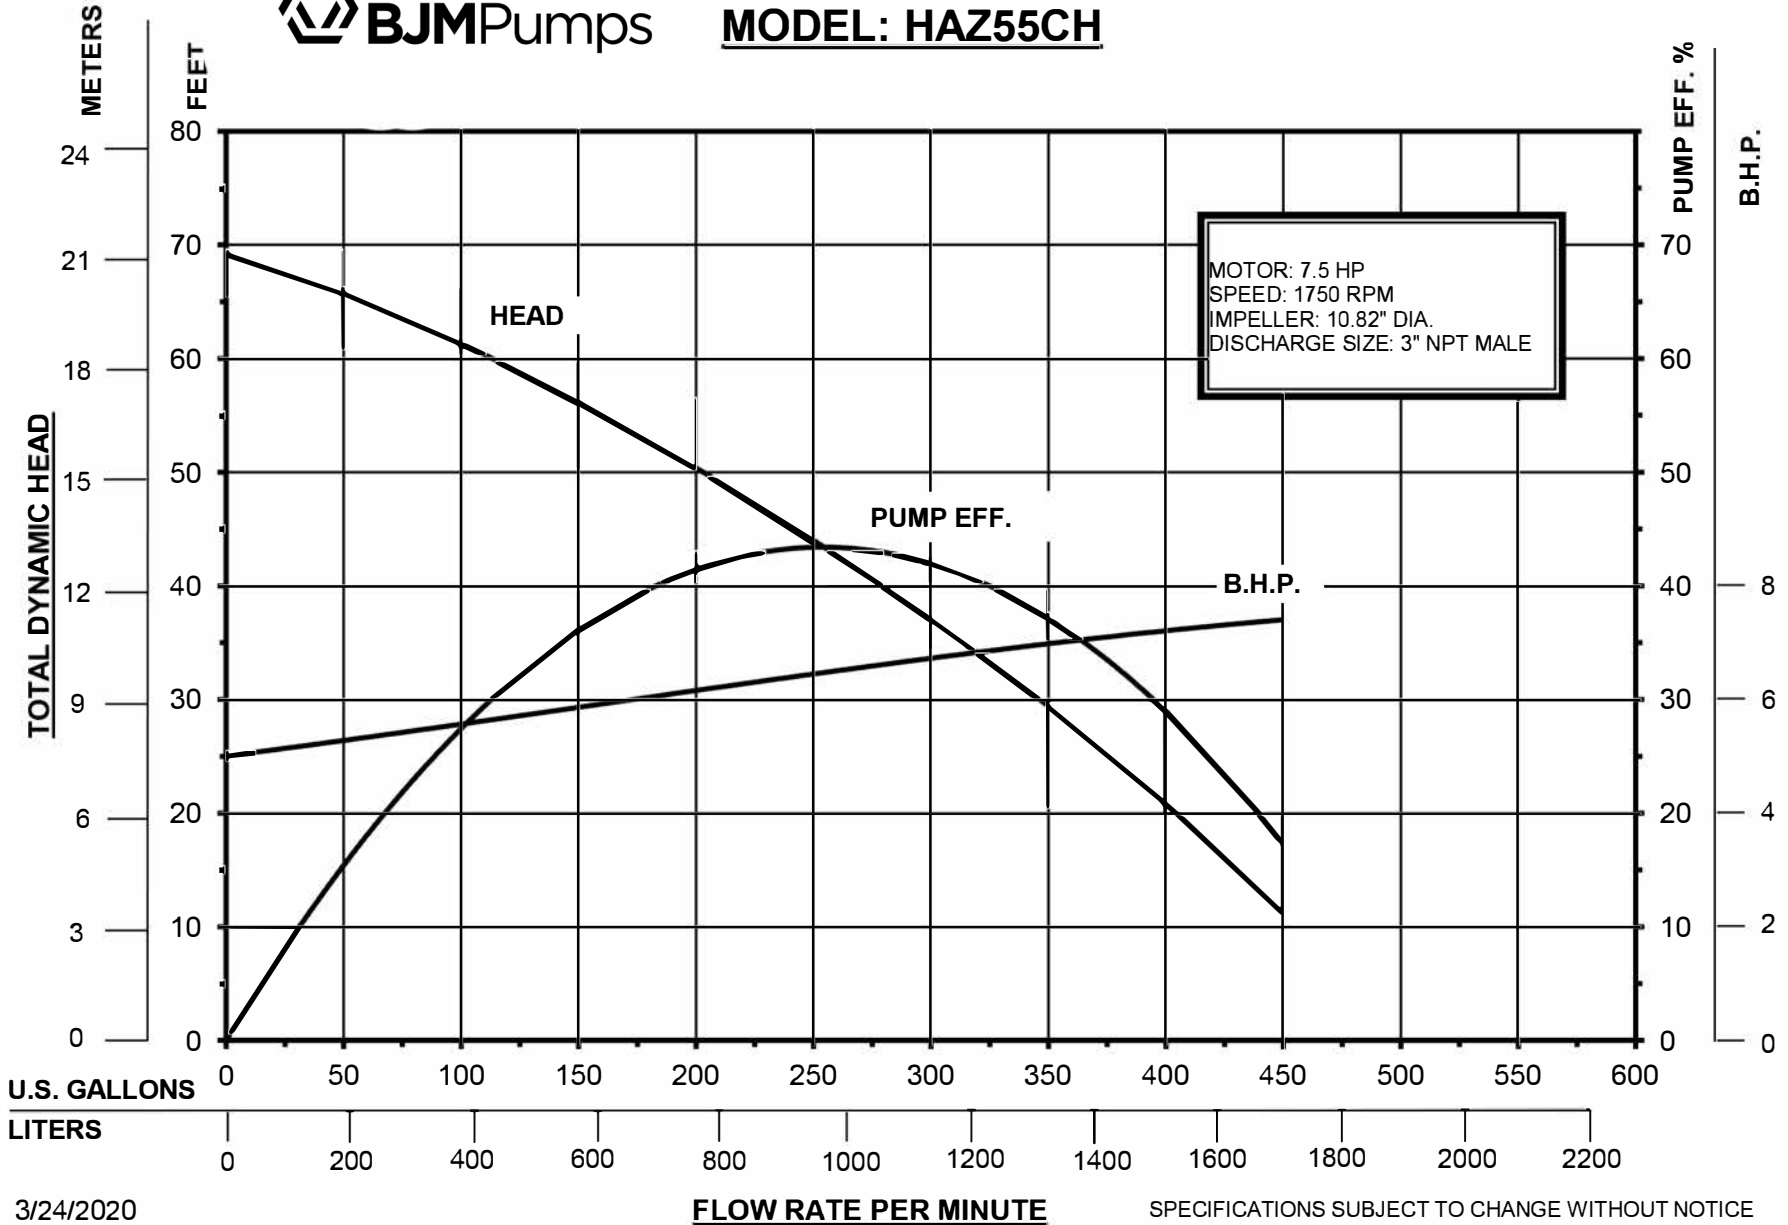

3/24/2020

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE