

INDUSTRIAL
FLOW
SOLUTIONS™**TECHNICAL DATA****BJM Pumps® A4-22****Dwg:**

DS-C43-013

Rev:

2

Date:

9/9/2024

GENERAL DATA

MAX. FLOW:	377 GPM (1427.1 L/min)
MAX. HEAD:	39' (11.9m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SINGLE VANE NON-CLOG
MINIMUM SUBMERSION DEPTH:	23" (562 mm)
SOLID SIZE:	3" (75 mm)
IMPELLER DIAMETER:	7.21" (183 mm)
DISCHARGE SIZE	DN80 PN16
PUMP WEIGHT, without cable:	152.1 lbs (69 kg)
SHIPPING WEIGHT:	156.2 lbs (70.86 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR CASING	CAST IRON, EN 1561
PUMP VOLUTE	CAST IRON, EN 1561
IMPELLER	CAST IRON, EN 1561
O-RINGS	BUNA
ROTOR SHAFT	STAINLESS STEEL AISI 420
EXTERNAL HARDWARE	STAINLESS STEEL A2-70
BALL BEARING: PERM. LUBE. UPPER	6205-ZZCMDNS7S6
BALL BEARING: PERM. LUBE. LOWER	3205B-2ZRTNG

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 3 (CONTINUOUS DUTY ²)	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	F	
MOTOR SERVICE FACTOR	1.1	
VOLTAGE ¹ - 60 Hz	230V	460V
CURRENT F.L.A.	9.6	4.8
LOCKED ROTOR CURRENT (LRA)	37.4	18.7
POWER CORD: GAGE; LENGTH	AWG 16/7, 33' (10m), SOOW	
MOTOR PROTECTION	THERMAL OVERLOAD	
SEAL LEAK DETECTOR ³	Seal Minder® MOISTURE SENSING PROBE	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® A4-22

Dwg:




DS-C43-008

Rev:

1

Date:

5/20/2024

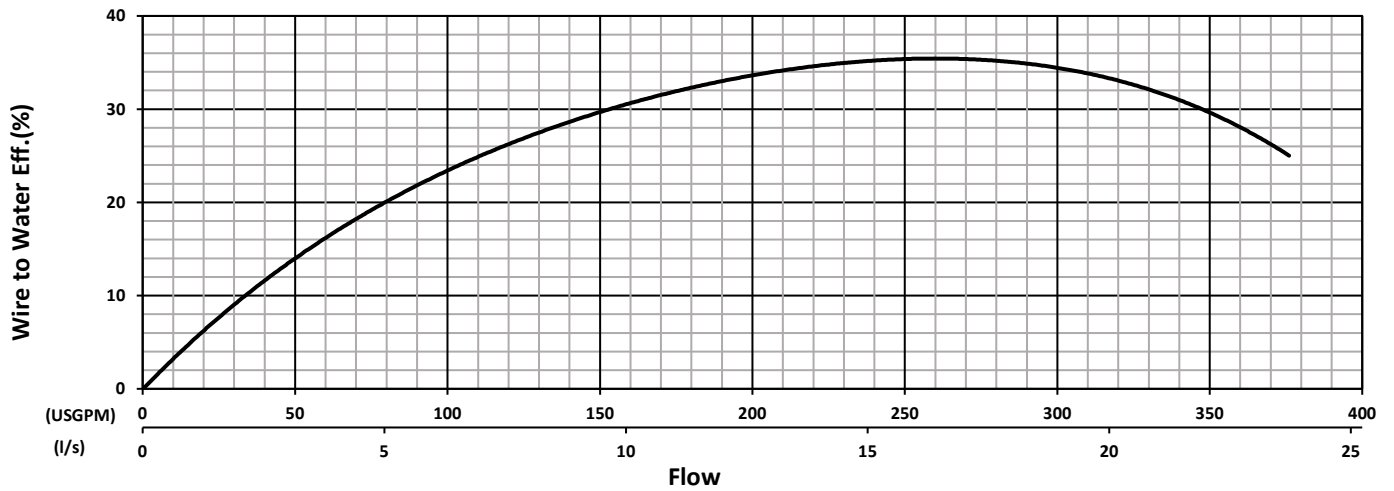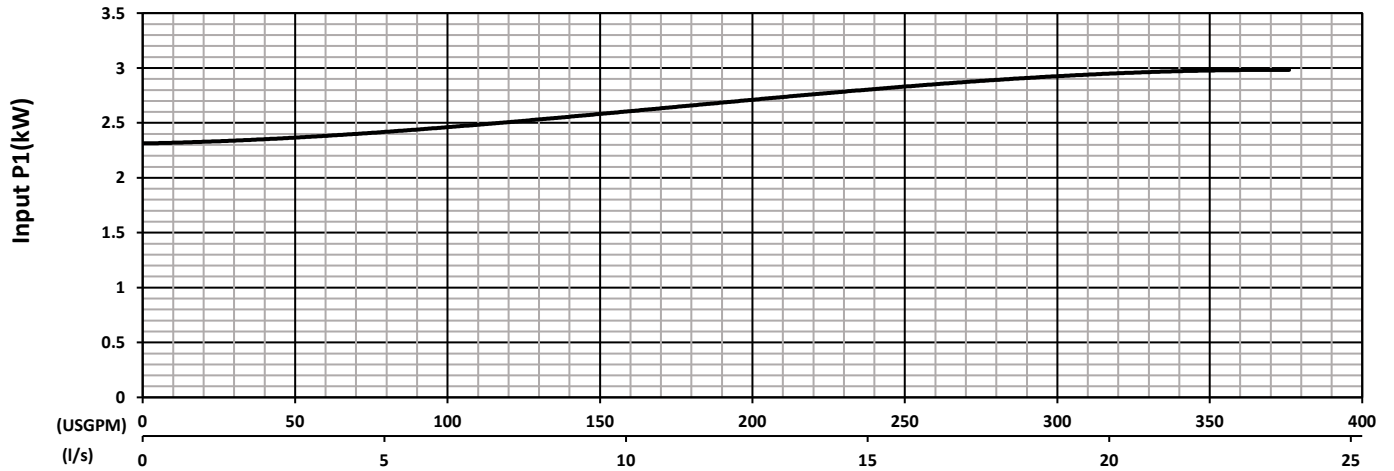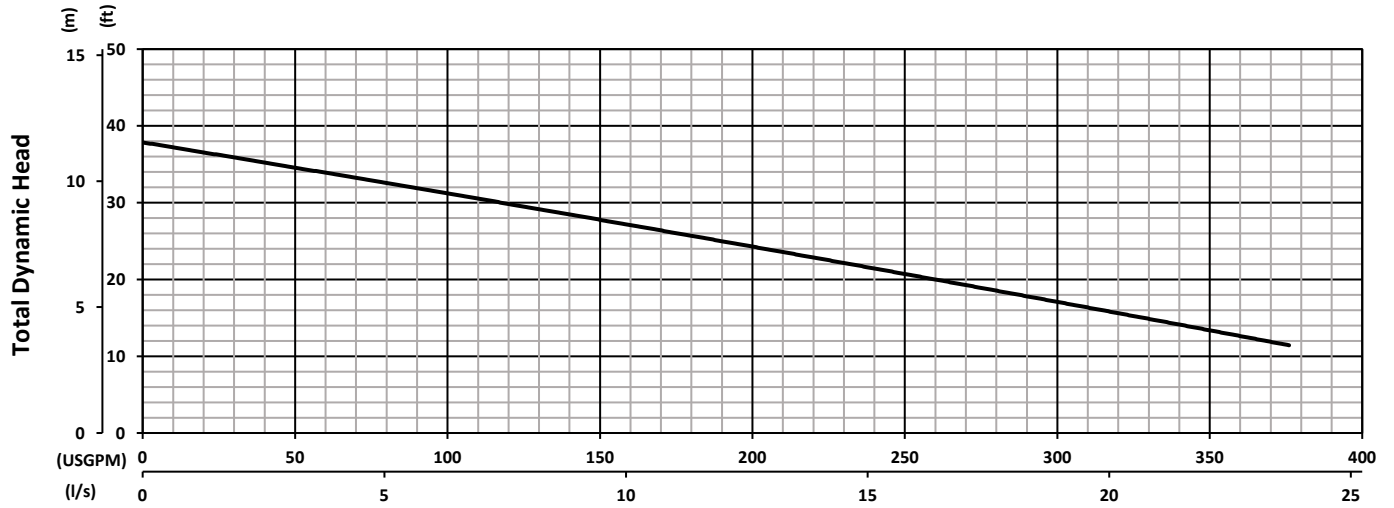

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

22 - Dual Units

Frequency	60 Hz
Pump Speed	1750 RPM
Impeller	183mm

Specifications subject to change without notice