

INDUSTRIAL
FLOW
SOLUTIONS™**TECHNICAL DATA****BJM Pumps® A4-75****Dwg:**

DS-C43-009

Rev:

2

Date:

9/9/2024

GENERAL DATA

MAX. FLOW:	944 GPM (3573.4 L/min)
MAX. HEAD:	79' (24.1m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SINGLE VANE NON-CLOG
MINIMUM SUBMERSION DEPTH:	29" (718 mm)
SOLID SIZE:	3.6" (90 mm)
IMPELLER DIAMETER:	8.41" (213.4 mm)
DISCHARGE SIZE	DN100 PN16
PUMP WEIGHT, without cable:	242.5 lbs (110 kg)
SHIPPING WEIGHT:	248.7 lbs (112.8 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR CASING	CAST IRON, EN 1561
PUMP VOLUTE	CAST IRON, EN 1561
IMPELLER	CAST IRON, EN 1561
O-RINGS	BUNA
ROTOR SHAFT	STAINLESS STEEL AISI 420
EXTERNAL HARDWARE	STAINLESS STEEL A2-70
BALL BEARING: PERM. LUBE. UPPER	6206-ZZCMDNS7S6
BALL BEARING: PERM. LUBE. LOWER	3306B-2ZRTNG

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 10 (CONTINUOUS DUTY ²)
MOTOR RPM	1750
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE ¹ - 60 Hz	460V
CURRENT F.L.A.	14
LOCKED ROTOR CURRENT (LRA)	85.3
POWER CORD: GAGE; LENGTH	AWG 12/4 + 16/3, 33' (10m), SOOW
MOTOR PROTECTION	THERMAL OVERLOAD
SEAL LEAK DETECTOR ³	Seal Minder® MOISTURE SENSING PROBE
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® A4-75

Dwg:




DS-C43-003

Rev:

1

Date:

5/3/2024

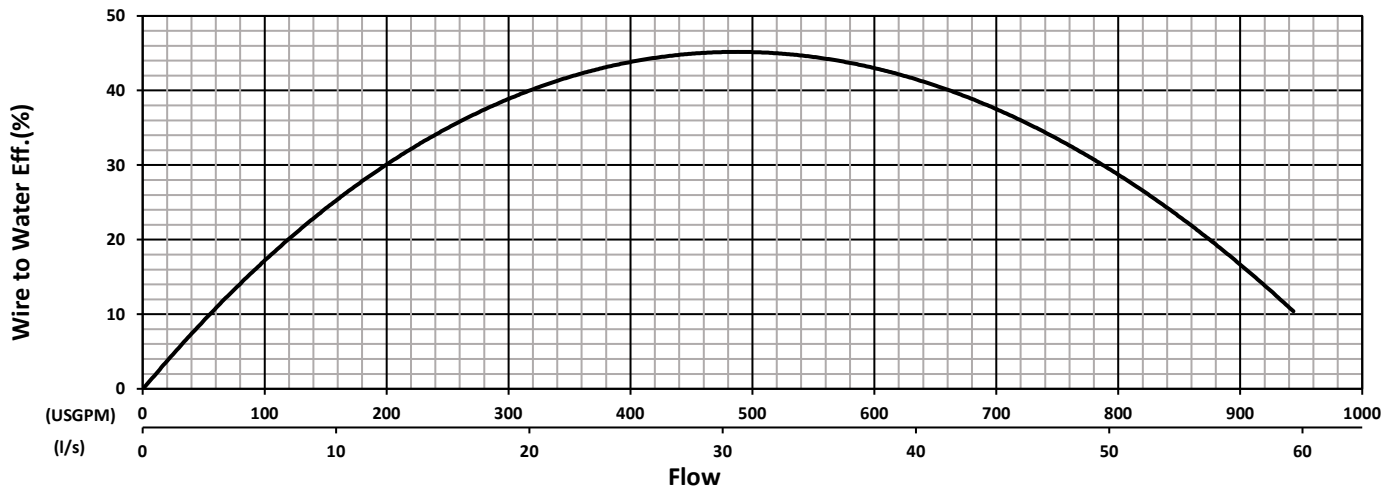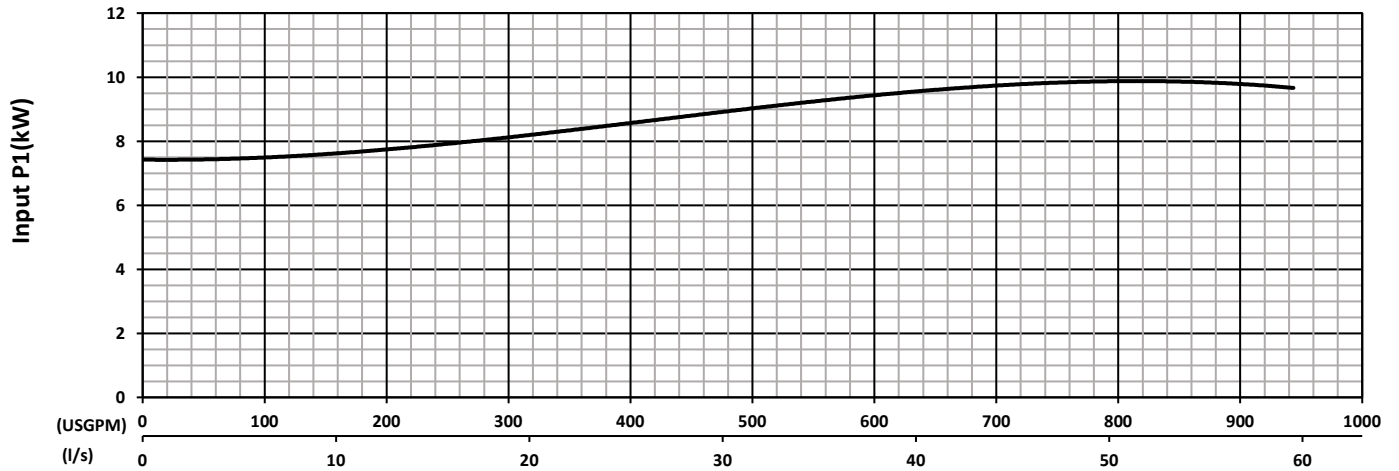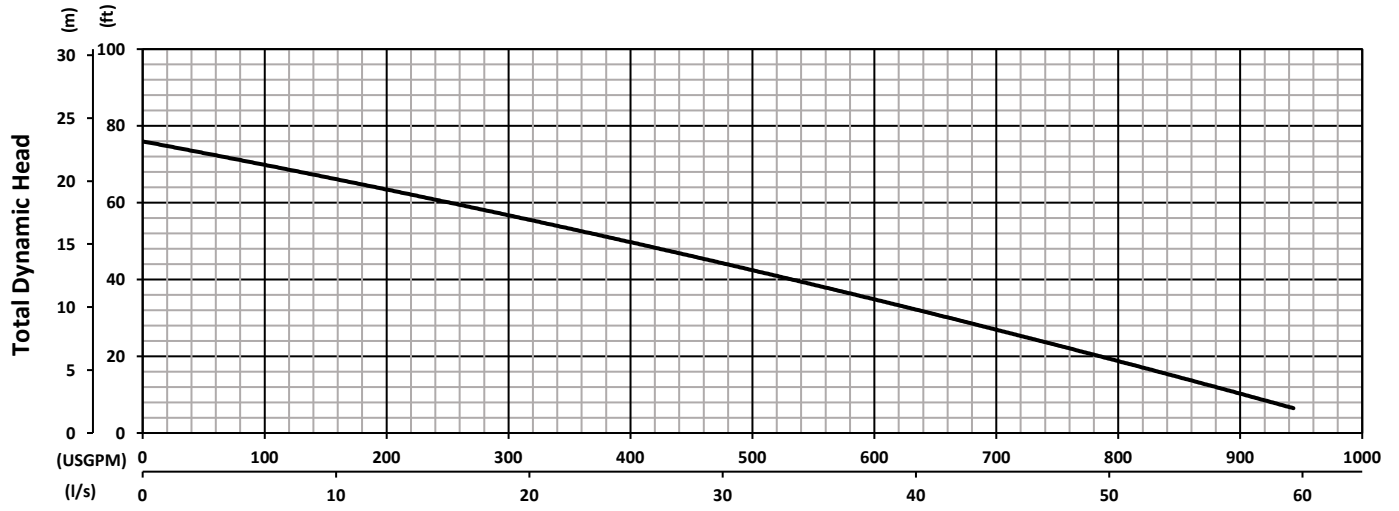

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

75 - Dual Units

Frequency	60 Hz
Pump Speed	1750 RPM
Impeller	213.4mm

Specifications subject to change without notice