



INDUSTRIAL
FLOW
SOLUTIONS™

TECHNICAL DATA

BJM Pumps® V2-15

Dwg:	DS-C61-011	Rev:	1	Date:	3/5/2024
-------------	------------	-------------	---	--------------	----------

GENERAL DATA

MAX. FLOW:	179 GPM (677.6 L/min)
MAX. HEAD:	32' (9.8m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON-CLOG VORTEX
MINIMUM SUBMERSION DEPTH:	19" (481 mm)
SOLID SIZE:	2" (50 mm)
IMPELLER DIAMETER:	4.18" (106 mm)
DISCHARGE SIZE	DN65 PN10
PUMP WEIGHT, without cable:	90.4 lbs (41 kg)
SHIPPING WEIGHT:	91.5 lbs (41.5 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR CASING	CAST IRON, EN 1561
PUMP VOLUTE	CAST IRON, EN 1561
IMPELLER	CAST IRON, EN 1561
O-RINGS	BUNA
ROTOR SHAFT	STAINLESS STEEL AISI 420
EXTERNAL HARDWARE	STAINLESS STEEL A2-70
BALL BEARING: PERM. LUBE. UPPER	6204-ZZCMDNS7S6
BALL BEARING: PERM. LUBE. LOWER	3204B-2ZRTNG

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 2 (CONTINUOUS DUTY ²)
MOTOR RPM	3450
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE ¹ - 60 Hz	460V
CURRENT F.L.A.	3.4
LOCKED ROTOR CURRENT (LRA)	19.8
POWER CORD: GAGE; LENGTH	AWG 16/7, 33' (10m), SOOW
MOTOR PROTECTION	THERMAL OVERLOAD
SEAL LEAK DETECTOR ³	Seal Minder® MOISTURE SENSING PROBE
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® V2-15

Dwg:




DS-C61-010

Rev:

1

Date:

2/27/2024

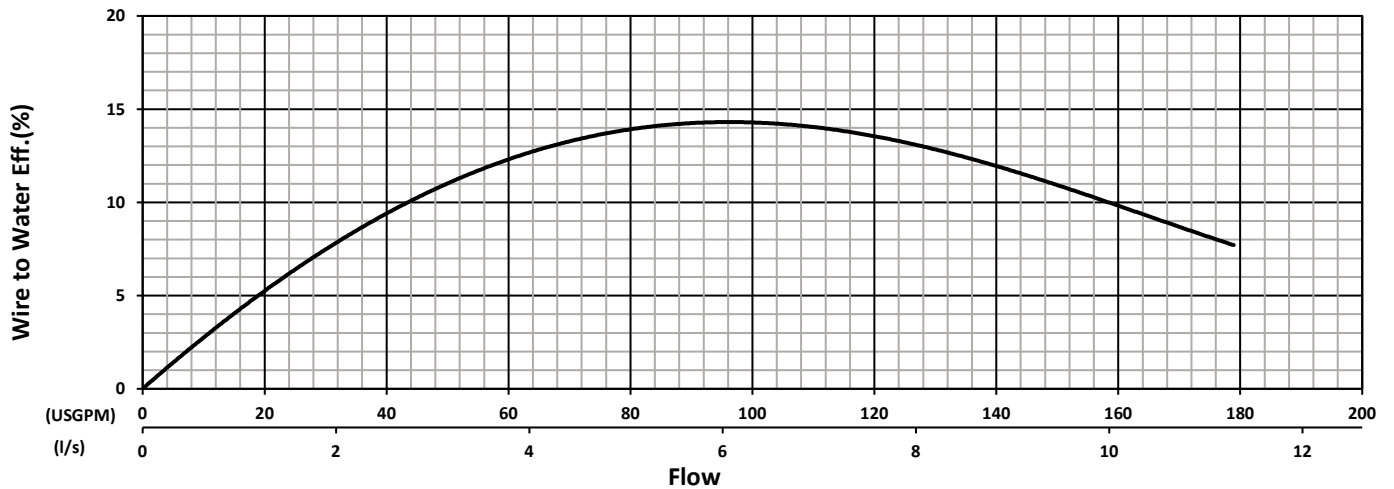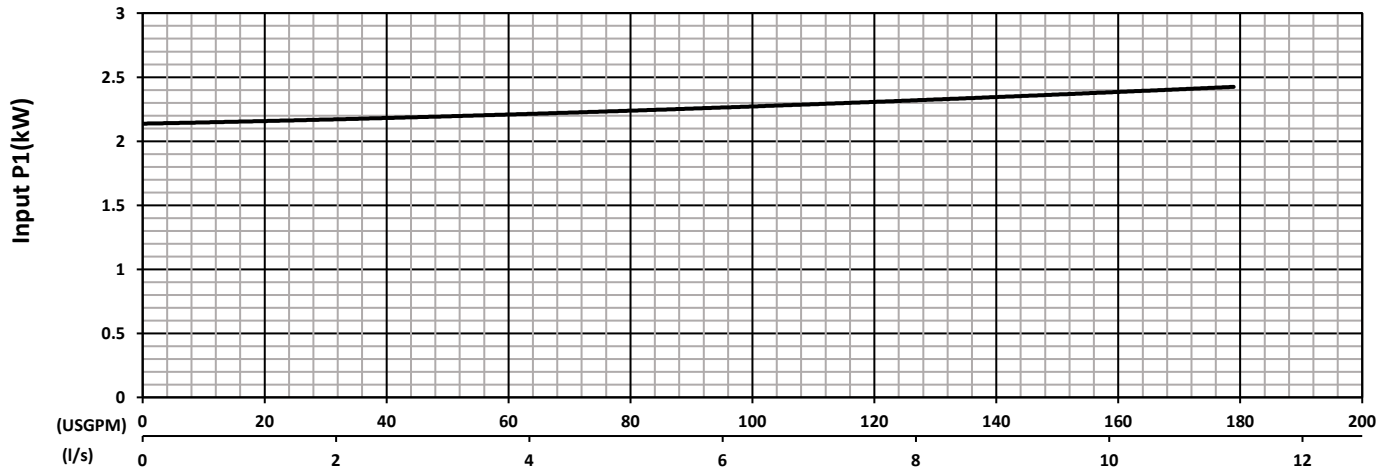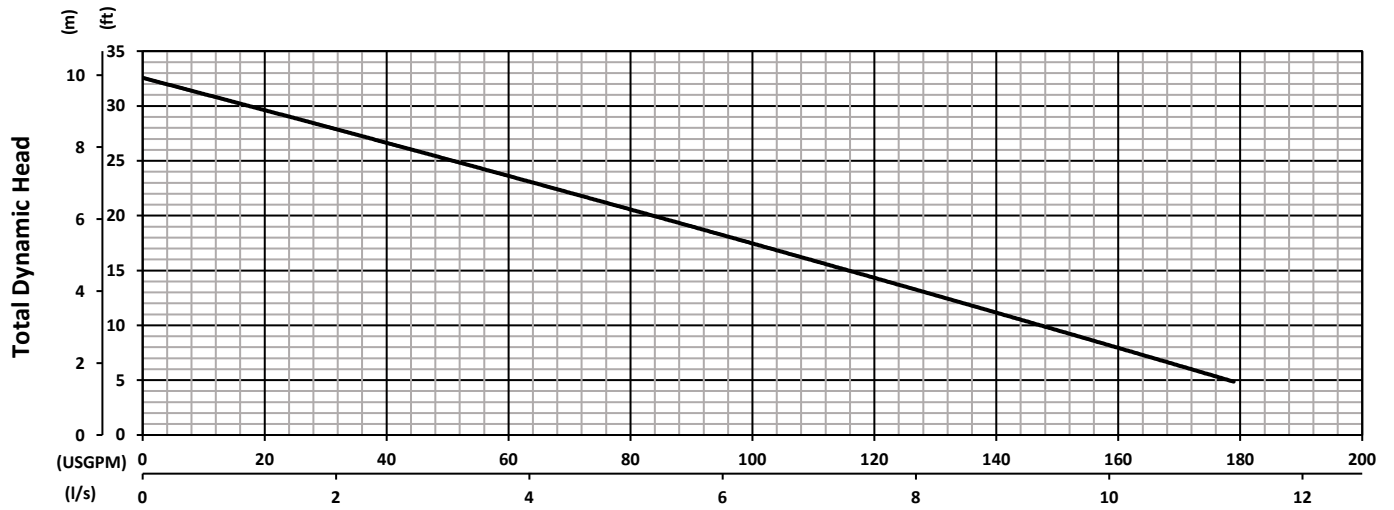

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

15 - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller 106mm

Specifications subject to change without notice