



INDUSTRIAL
FLOW
SOLUTIONS™

TECHNICAL DATA

BJM Pumps® V2-75

Dwg:	DS-C61-014	Rev:	2	Date:	9/9/2024
-------------	------------	-------------	---	--------------	----------

GENERAL DATA

MAX. FLOW:	514 GPM (1945.7 L/min)
MAX. HEAD:	89' (27.1m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON-CLOG VORTEX
MINIMUM SUBMERSION DEPTH:	25" (610 mm)
SOLID SIZE:	2.8" (70 mm)
IMPELLER DIAMETER:	6.23" (158 mm)
DISCHARGE SIZE	DN80 PN16
PUMP WEIGHT, without cable:	154.3 lbs (70 kg)
SHIPPING WEIGHT:	200.6 lbs (91 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR CASING	CAST IRON, EN 1561
PUMP VOLUTE	CAST IRON, EN 1561
IMPELLER	CAST IRON, EN 1561
O-RINGS	BUNA
ROTOR SHAFT	STAINLESS STEEL AISI 420
EXTERNAL HARDWARE	STAINLESS STEEL A2-70
BALL BEARING: PERM. LUBE. UPPER	6206-ZZCMDNS7S6
BALL BEARING: PERM. LUBE. LOWER	3306B-2ZRTNG

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 10 (CONTINUOUS DUTY ²)
MOTOR RPM	3450
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE ¹ - 60 Hz	460V
CURRENT F.L.A.	14
LOCKED ROTOR CURRENT (LRA)	85.3
POWER CORD: GAGE; LENGTH	AWG 12/4 + 16/3, 33' (10m), SOOW
MOTOR PROTECTION	THERMAL OVERLOAD
SEAL LEAK DETECTOR ³	Seal Minder® MOISTURE SENSING PROBE
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® V2-75

Dwg:




DS-C61-006

Rev:

1

Date:

1/16/2024

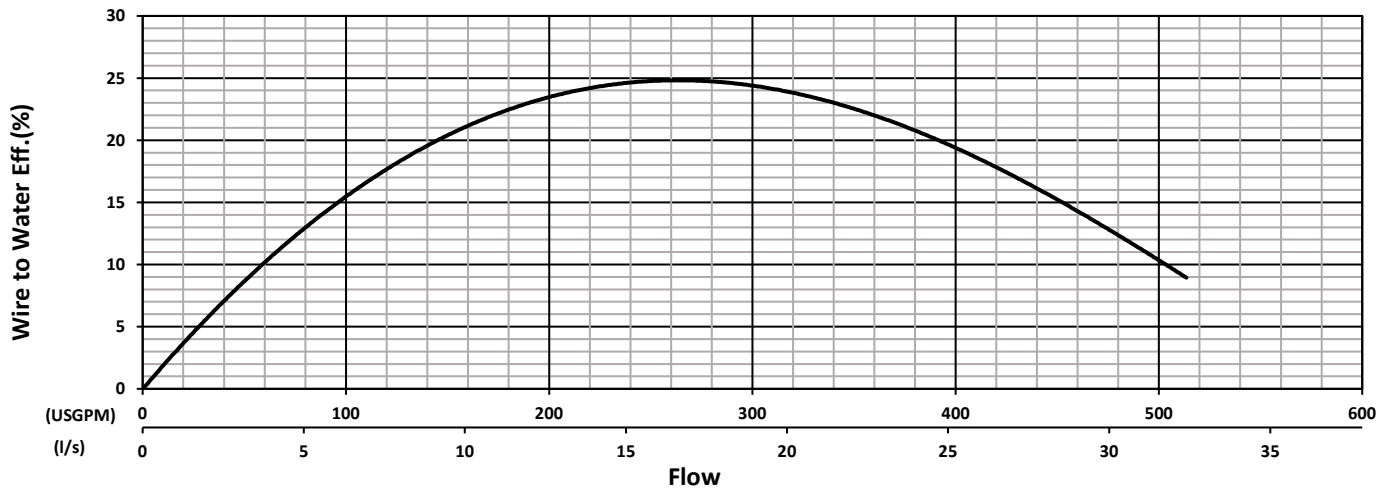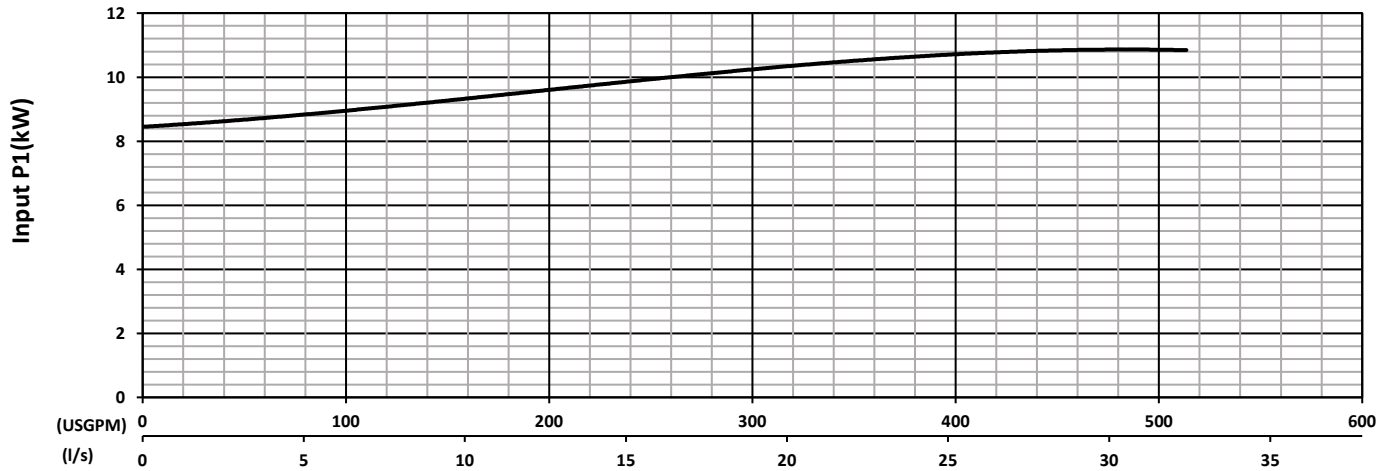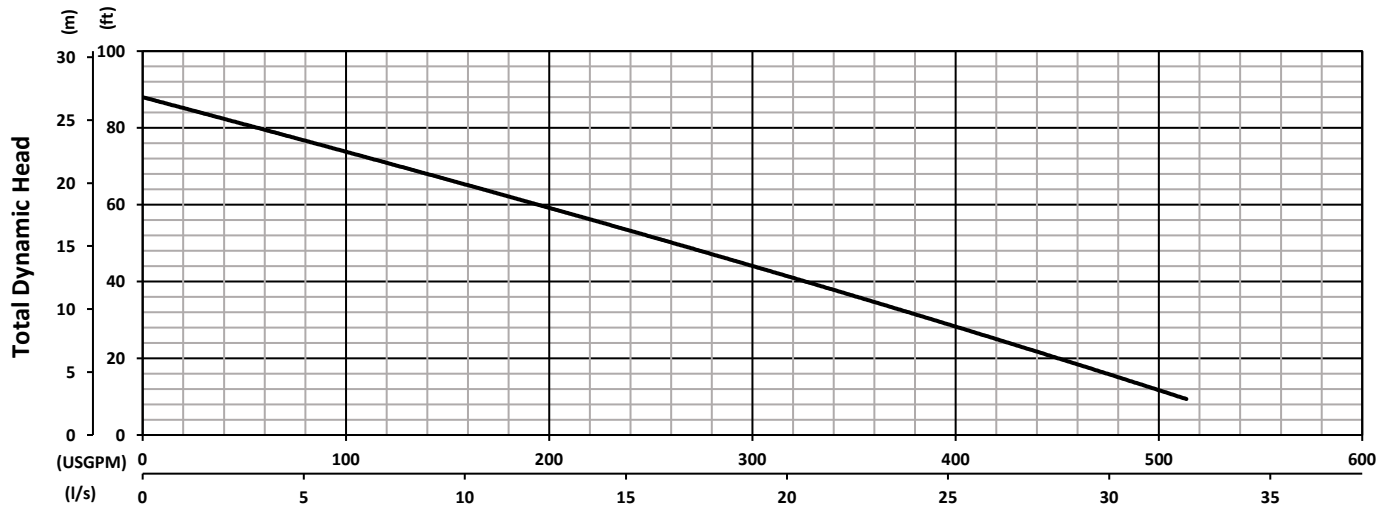

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

75 - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller 158mm

Specifications subject to change without notice