



INDUSTRIAL
FLOW
SOLUTIONS™

TECHNICAL DATA

BJM Pumps® V4-15

Dwg:

DS-C62-010

Rev:

1

Date:

5/28/2024

GENERAL DATA

| | |
|-----------------------------|---|
| MAX. FLOW: | 276 GPM (1044.8 L/min) |
| MAX. HEAD: | 30' (9.1m) |
| MAX. SUBMERSION DEPTH: | 65' (20m) or limited to length of power cord, Consult factory for deeper depths |
| PUMP TYPE | NON-CLOG VORTEX |
| MINIMUM SUBMERSION DEPTH: | 18" (453 mm) |
| SOLID SIZE: | 3" (75 mm) |
| IMPELLER DIAMETER: | 5.75" (146 mm) |
| DISCHARGE SIZE | DN80 PN16 |
| PUMP WEIGHT, without cable: | 108 lbs (49 kg) |
| SHIPPING WEIGHT: | 112.1 lbs (50.86 kg) |

CONSTRUCTION / MATERIAL DATA

| | |
|---------------------------------|-------------------------------------|
| UPPER MECHANICAL SEAL | CARBON/CERAMIC FKM |
| LOWER MECHANICAL SEAL | SILICON CARBIDE/SILICON CARBIDE FKM |
| MOTOR CASING | CAST IRON, EN 1561 |
| PUMP VOLUTE | CAST IRON, EN 1561 |
| IMPELLER | CAST IRON, EN 1561 |
| O-RINGS | BUNA |
| ROTOR SHAFT | STAINLESS STEEL AISI 420 |
| EXTERNAL HARDWARE | STAINLESS STEEL A2-70 |
| BALL BEARING: PERM. LUBE. UPPER | 6204-ZZCMDNS7S6 |
| BALL BEARING: PERM. LUBE. LOWER | 3204B-2ZRTNG |

ELECTRICAL / MOTOR DATA

| | |
|---------------------------------|--|
| MOTOR: TYPE, RATING HP | SUBMERSIBLE, 2 (CONTINUOUS DUTY ²) |
| MOTOR RPM | 1750 |
| MOTOR INSULATION CLASS | F |
| MOTOR SERVICE FACTOR | 1.1 |
| VOLTAGE ¹ - 60 Hz | 460V |
| CURRENT F.L.A. | 3.4 |
| LOCKED ROTOR CURRENT (LRA) | 19.8 |
| POWER CORD: GAGE; LENGTH | AWG 16/7, 33' (10m), SOOW |
| MOTOR PROTECTION | THERMAL OVERLOAD |
| SEAL LEAK DETECTOR ³ | Seal Minder® MOISTURE SENSING PROBE |
| MAXIMUM LIQUID TEMPERATURE | 104°F (40°C) |

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® V4-15

Dwg:




DS-C62-003

Rev:

1

Date:

5/20/2024

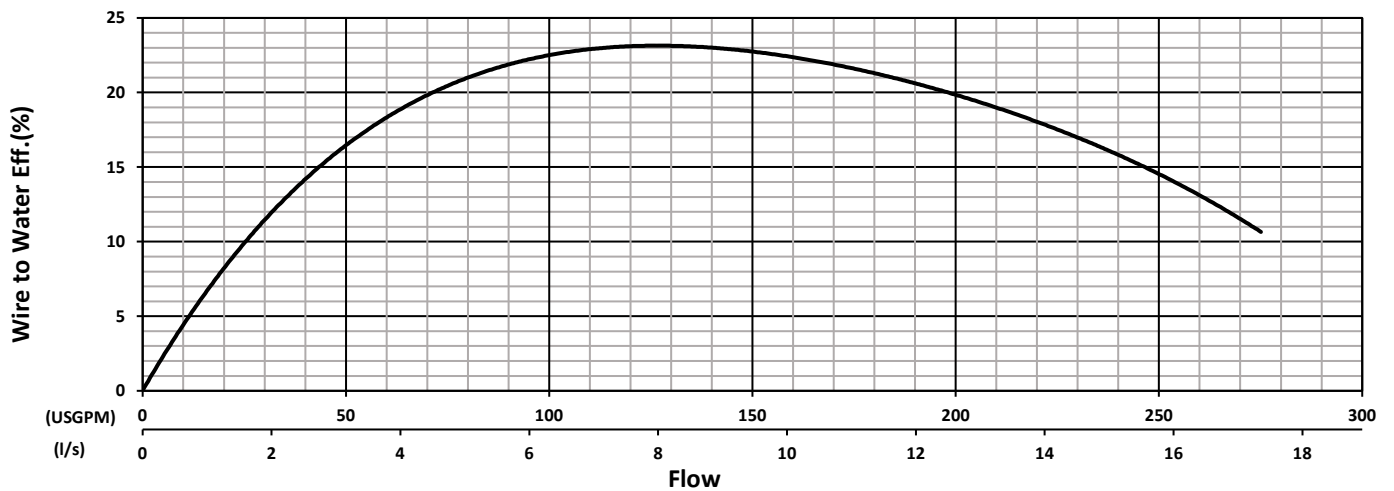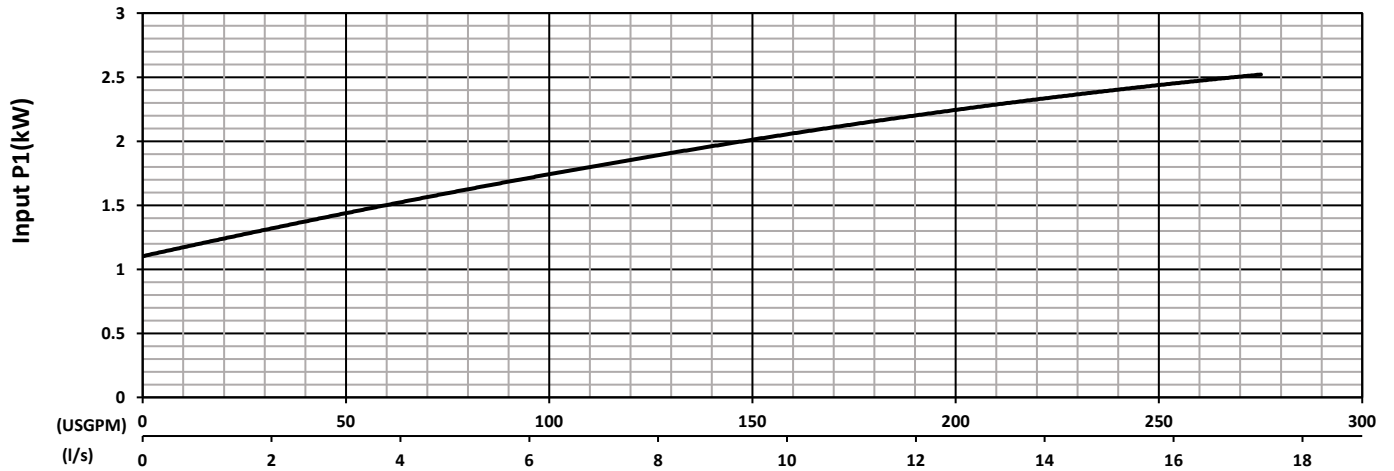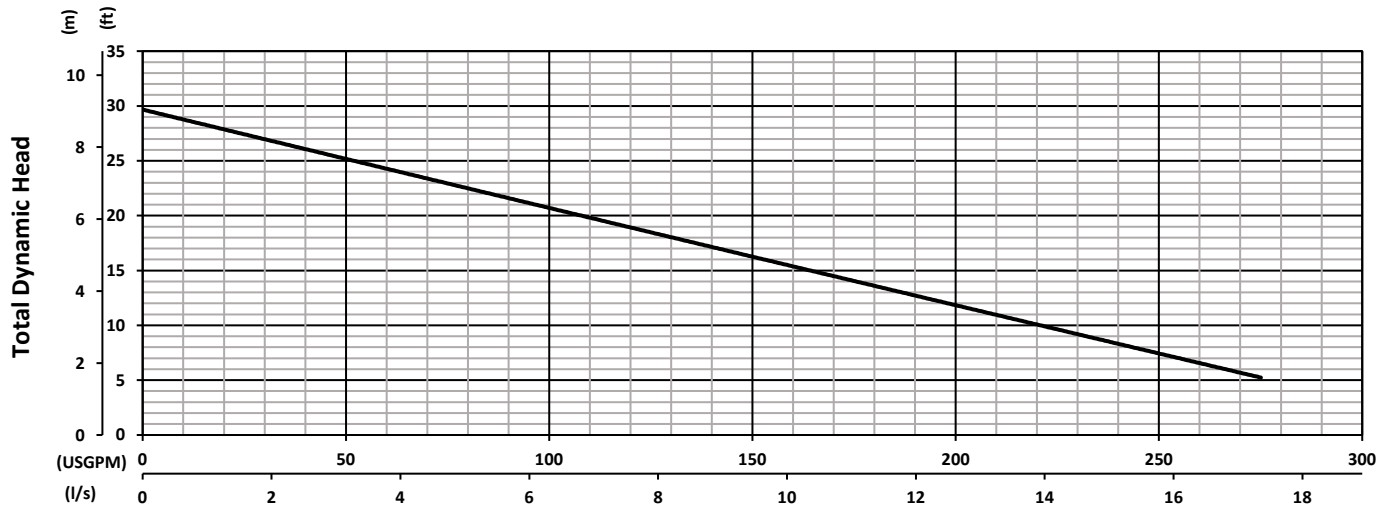

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

15 - Dual Units

Frequency 60 Hz
Pump Speed 1750 RPM
Impeller 146mm

Specifications subject to change without notice