

MOTOR SPECIFICATIONS

Motor Design	NEMA design B, squirrel cage induction, air filled
Motor Type	Enclosed submersible, IP 68
Maximum submergence	65 feet (20m)
Insulation Class	Class F, rated at 155° C
Motor Protection	Bi-metallic Thermal Switch
Bi-Metallic Temp Trip	130° C ± 5° C
Service Factor	1.15
Max. Liquid Temperature	104°F (40°C)
Voltage Tolerance	± 10% from nominal



MOTOR DATA, 60Hz

Model	Phase	Output Power BHP	Volts	Full Load Amps	Locked Rotor Amps	NEMA Code Letter	Power Factor 100% Load	Motor Efficiency 100% Load	Pole/Speed (rpm)
SL750-2	1	6.4	230	22	151	F	.90	.86	2/3450
			230	17.8	122.6	J	.80	.86	2/3450
	3	6.4	460	8.9	61.3	J	.80	.86	2/3450
			575	8.6	49	J	.80	.86	2/3450

MATERIALS OF CONSTRUCTION

Upper Motor Lid	356-T6 Aluminum
Motor Housing	356-T6 Aluminum
Oil Chamber	AISI 304 Stainless Steel
Strainer	AISI 304 Stainless Steel
Volute	ASTM A-48, Class 35B
External Hardware	AISI 304 Stainless Steel
O-Rings	NBR
Motor Shaft	AISI 416 Stainless Steel
Upper Bearing	Deep groove ball bearing, double sealed
Lower Bearing	Double row angular contact ball bearing, double shielded
Shaft Seal	SiC/SiC
Impeller	AISI 316 Stainless Steel

DIMENSIONS, WEIGHT, AND MISC.

Pump weight (without cable)	127 lbs (57.6kg)
Discharge size	3-inch NPT male vertical
Strainer Opening	18.90mm

CABLE SPECIFICATIONS

MODEL	PHASE/VOLTAGE	POWER CABLE	LENGTH	OUTER JACKET
SL750-2	1Ø-230V	Drill Cord SOOW 12/4	50' Standard	CPE, Heavy Duty
	3Ø-230V	Drill Cord SOOW 10/5, 12/4	50' Standard	CPE, Heavy Duty
	3Ø-460V	Drill Cord SOOW 12/5, 10/5, 12/4	50' Standard	CPE, Heavy Duty
	3Ø-575V	Drill Cord SOOW 12/5, 10/5, 12/4	50' Standard	CPE, Heavy Duty






PERFORMANCE CURVE

Trash Pumps SL750-2

Dwg: DS-A19-003

Rev: 3

Date: 11/6/2017

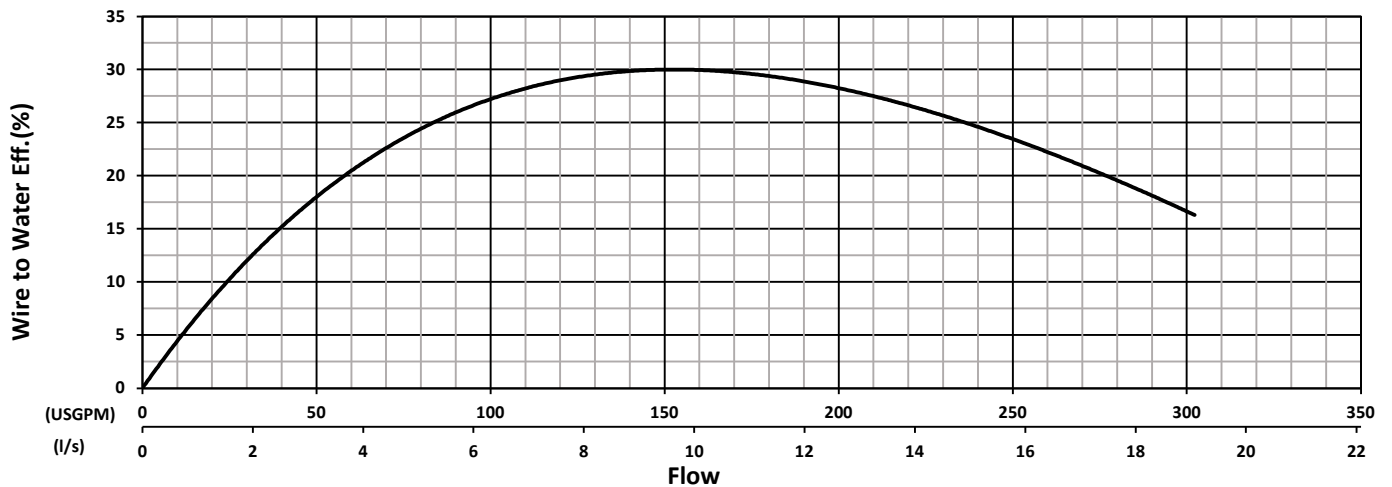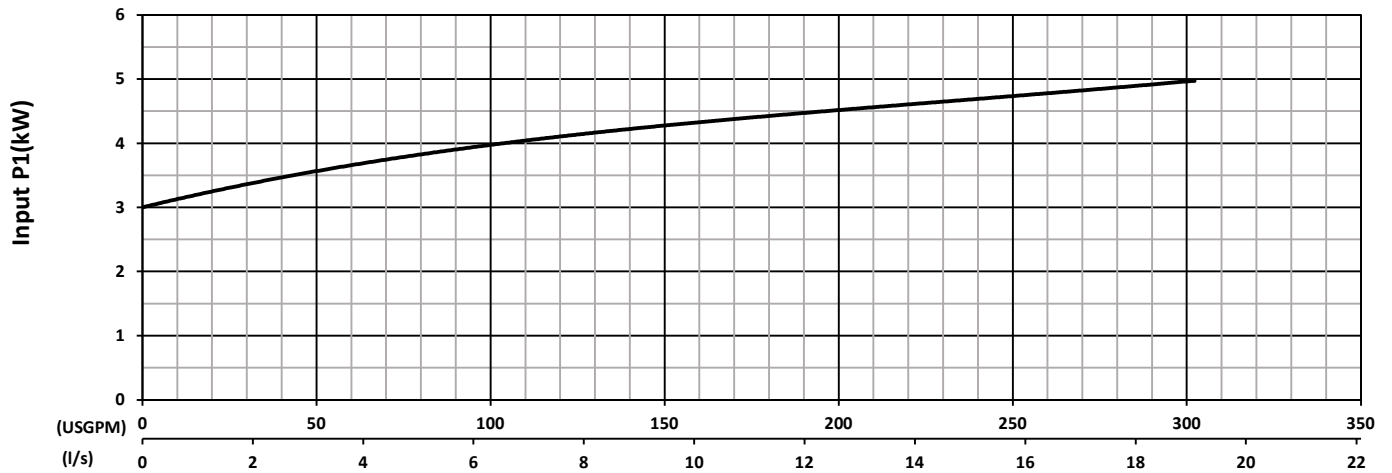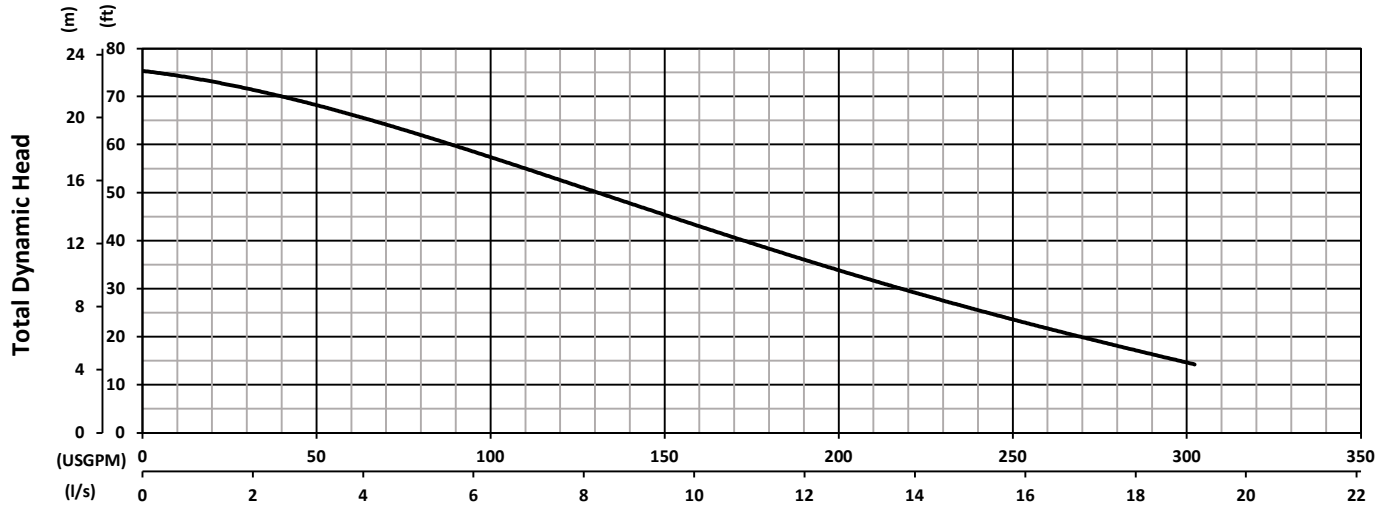

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

Pump Performance Test - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller Ø140mm

Specifications subject to change without notice