

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps®		
	Perfecta TIGF32 50Hz-3Ph			Dwg:	DS-C20-014	Rev:
				Date:	11/3/2025	

GENERAL DATA

MAX. FLOW:	45 GPM (170.3 L/min)
MAX. HEAD:	25' (7.6m)
MAX. SUBMERSION DEPTH:	32' (10m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	CHEMICAL RESISTANT DEWATERING
MINIMUM SUBMERSION DEPTH:	4" (85 mm)
SOLID SIZE:	0.25" (6.35 mm)
IMPELLER DIAMETER:	3.55" (90 mm)
DISCHARGE SIZE	1 ¼" NPT-FEMALE or 1 ½" TAPERED HOSE
PUMP WEIGHT, without cable:	17.4 lbs (7.9 kg)
SHIPPING WEIGHT:	26.7 lbs (12.12 kg)

CONSTRUCTION / MATERIAL DATA

UPPER LIP SEAL ¹	FKM or EPDM
LOWER LIP SEAL ¹	FKM or EPDM
O-RINGS ¹	FKM or EPDM
PUMP TOP COVER	Ultramid B3 WG 7
PUMP HANDLE	Polypropylene
PUMP CASING	NORYL GTX830
IMPELLER	NORYL GTX830
SUCTION COVER	NORYL GTX830
STRAINER	PPO-PA (Polyphenylene Oxide)
FLOAT	Hostalen PPH 7350 FL
ROTOR SHAFT	TITANIUM
EXTERNAL HARDWARE	TITANIUM
BALL BEARING: PERM. LUBE. UPPER	6001
BALL BEARING: PERM. LUBE. LOWER	6002

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 0.4
MOTOR RPM	2800
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE 3PH - 50 Hz	400V
CURRENT F.L.A.	1.2
POWER CORD: GAGE; LENGTH	AWG 16/4, 22' (6.7m), SOOW Super Vu-Tron Jacket
FLOAT CORD: GAGE	AWG 16/3, 22' (6.7m), SOOW Super Vu-Tron Jacket
MOTOR PROTECTION	OVERLOAD RELAY
MAXIMUM LIQUID TEMPERATURE	135°F (57°C)

1 - Multiple elastomer configurations available (Please indicate selection when ordering)

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL FLOW SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® Perfecta 50 Hz

Dwg:




DS-C20-002

Rev:

1

Date:

9/18/2024

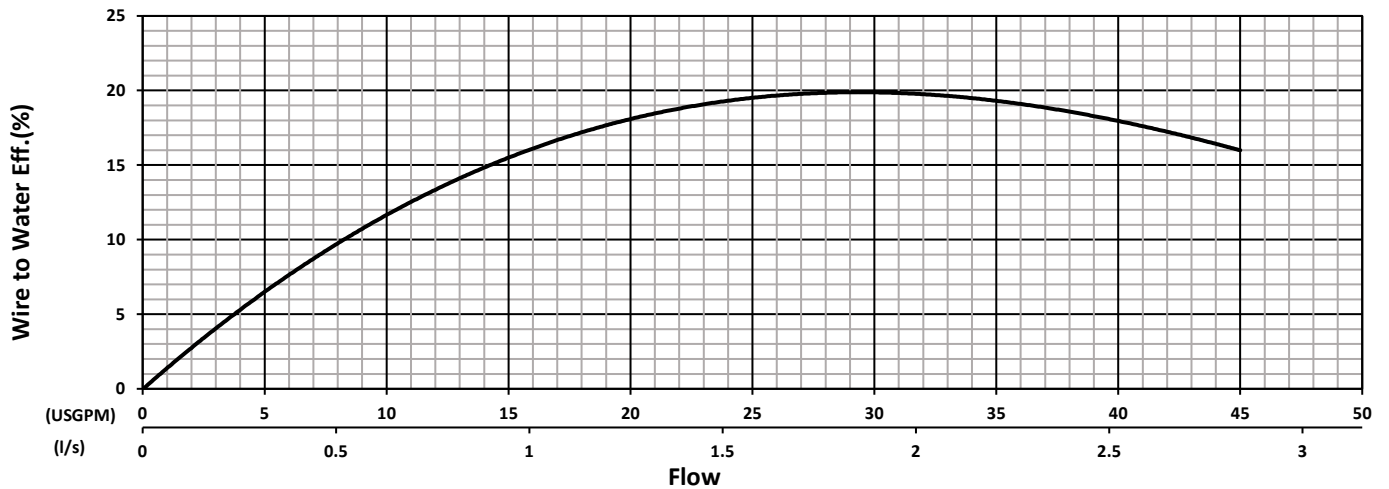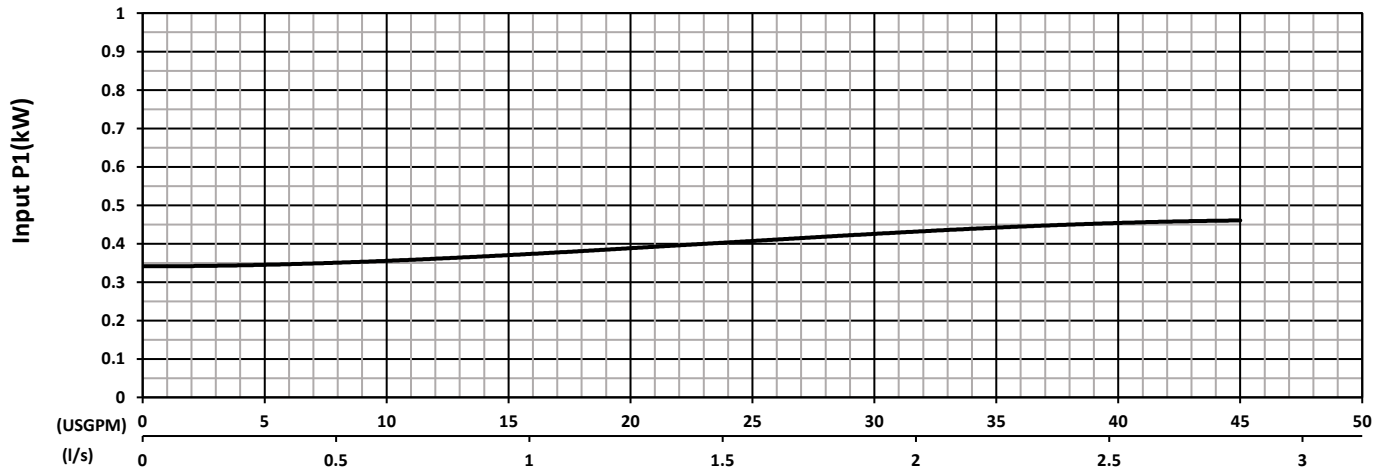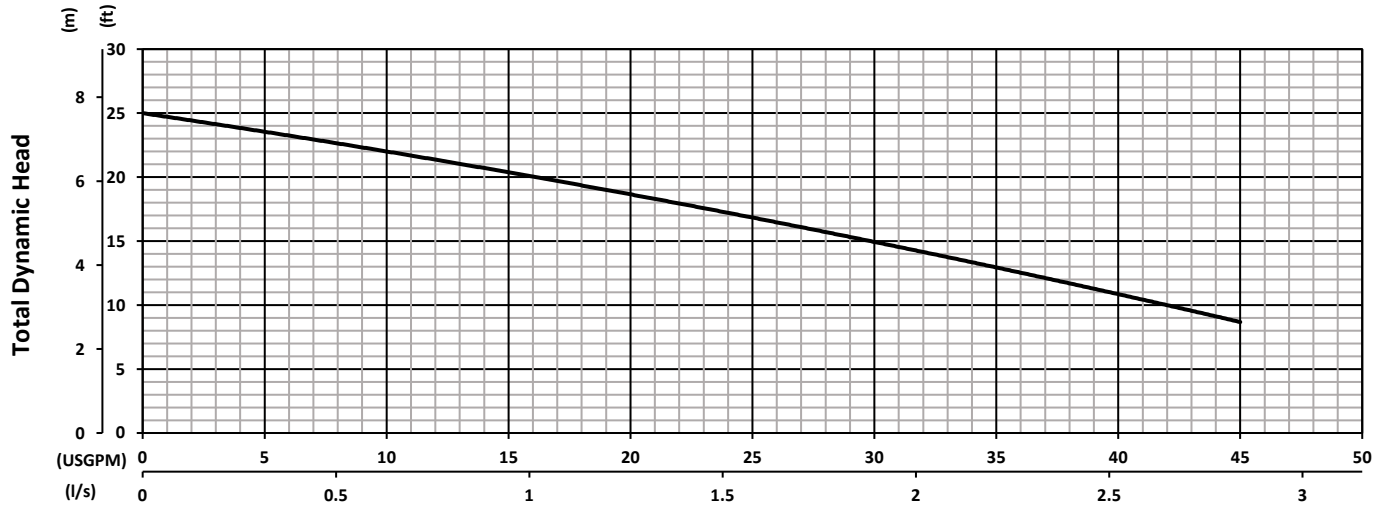

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

50 Hz - Dual Units

Frequency
Pump Speed
Impeller

50 Hz
3450 RPM
90mm

Specifications subject to change without notice