

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps® A4L-149		
	Dwg:	DS-C64-006	Rev:	1	Date:	10/10/2024

GENERAL DATA

MAX. FLOW:	2340 GPM (8857.9 L/min)
MAX. HEAD:	30' (9.1m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON-CLOG SOLIDS HANDLING
MINIMUM SUBMERSION DEPTH:	40" (996 mm)
SOLID SIZE:	4.4" (110 mm)
IMPELLER DIAMETER:	7.29" (185 mm)
DISCHARGE SIZE	DN200 PN10
PUMP WEIGHT, without cable:	652.6 lbs (296 kg)
SHIPPING WEIGHT:	782.6 lbs (355 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR CASING	CAST IRON, EN 1561
PUMP VOLUTE	CAST IRON, EN 1561
IMPELLER	CAST IRON, EN 1561
O-RINGS & LIP SEALS	BUNA
ROTOR SHAFT	STAINLESS STEEL AISI 420
EXTERNAL HARDWARE	STAINLESS STEEL A2-70
BALL BEARING: PERM. LUBE. UPPER	NU 207EW/C3
BALL BEARING: PERM. LUBE. LOWER	6312-DDUC3BQHS6

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 20 (CONTINUOUS DUTY ²)
MOTOR RPM	1750
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE ¹ - 60 Hz	460V
CURRENT F.L.A.	27
LOCKED ROTOR CURRENT (LRA)	136.4
POWER CORD: GAGE; LENGTH	AWG 8/4 + 16/3, 33' (10m), SEOOW
MOTOR PROTECTION	THERMAL OVERLOAD
SEAL LEAK DETECTOR ³	Seal Minder® MOISTURE SENSING PROBE
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® A4L-149

Dwg:


DS-C64-005

Rev:

1

Date:

10/10/2024

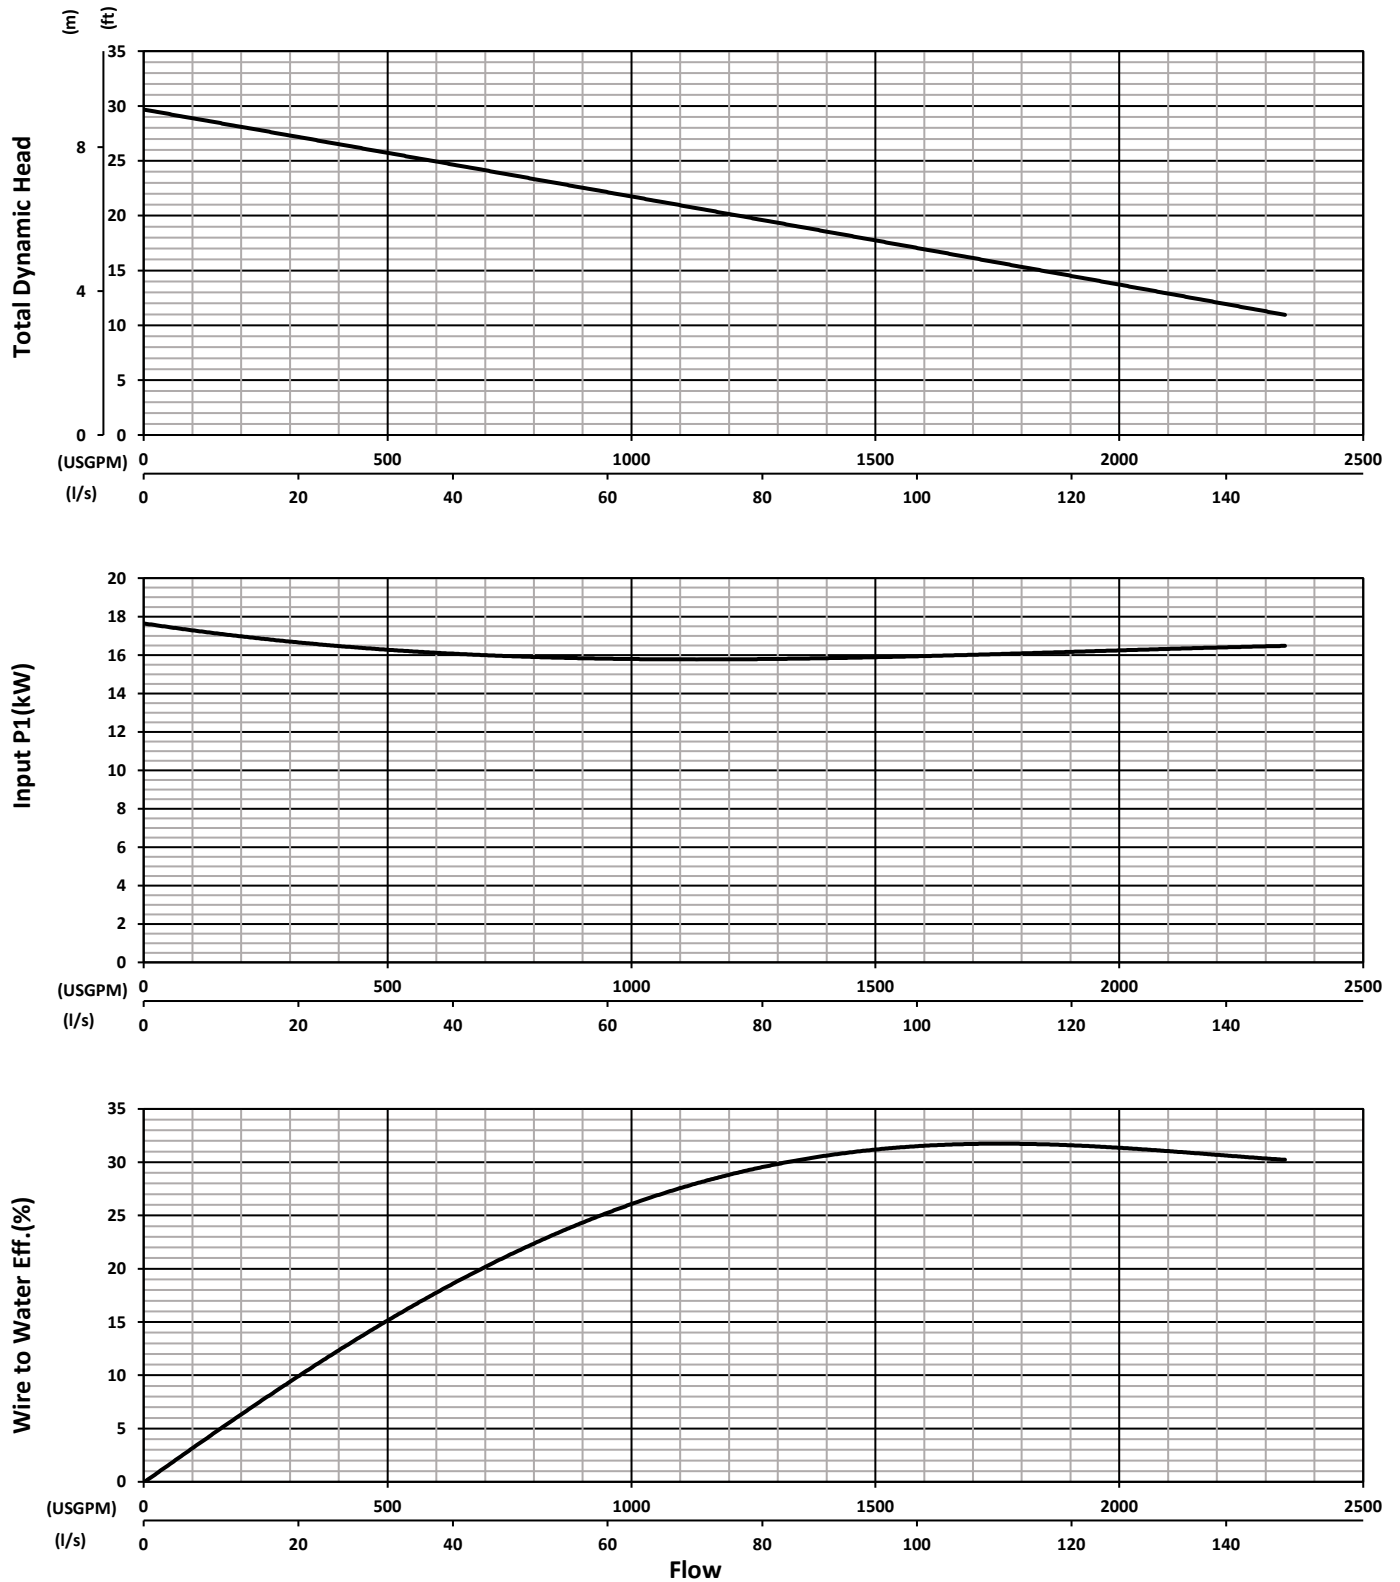

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

149 - Dual Units

Frequency 60 Hz
Pump Speed 1750 RPM
Impeller 185mm

Specifications subject to change without notice