

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps® A4L-263		
	Dwg:	DS-C64-020	Rev:	1	Date:	10/30/2024

GENERAL DATA

MAX. FLOW:	3188 GPM (12067.9 L/min)
MAX. HEAD:	71' (21.6m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON-CLOG SOLIDS HANDLING
MINIMUM SUBMERSION DEPTH:	42" (1048 mm)
SOLID SIZE:	4.4" (110 mm)
IMPELLER DIAMETER:	10.12" (257 mm)
DISCHARGE SIZE	DN200 PN10
PUMP WEIGHT, without cable:	756.2 lbs (343 kg)
SHIPPING WEIGHT:	886.3 lbs (402 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR CASING	CAST IRON, EN 1561
PUMP VOLUTE	CAST IRON, EN 1561
IMPELLER	CAST IRON, EN 1561
O-RINGS & LIP SEALS	BUNA
ROTOR SHAFT	STAINLESS STEEL AISI 420
EXTERNAL HARDWARE	STAINLESS STEEL A2-70
BALL BEARING: PERM. LUBE. UPPER	NU 207EW/C3
BALL BEARING: PERM. LUBE. LOWER	6314-DDUC3ENSS6

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 35.3 (CONTINUOUS DUTY ²)
MOTOR RPM	1750
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE ¹ - 60 Hz	460V
CURRENT F.L.A.	46.4
LOCKED ROTOR CURRENT (LRA)	234.3
POWER CORD: GAGE; LENGTH	AWG 8/4, 50' (15m), Type-G
MOTOR PROTECTION	THERMAL OVERLOAD
SEAL LEAK DETECTOR ³	Seal Minder® MOISTURE SENSING PROBE
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)

1 - Available in other voltages for 50Hz

2 - Continuous duty motor - see minimum submersion depth above

3 - Requires a seal fail circuit in control panel for warning signal

©2024 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® A4L-263

Dwg:




DS-C64-019

Rev:

1

Date:

10/30/2024

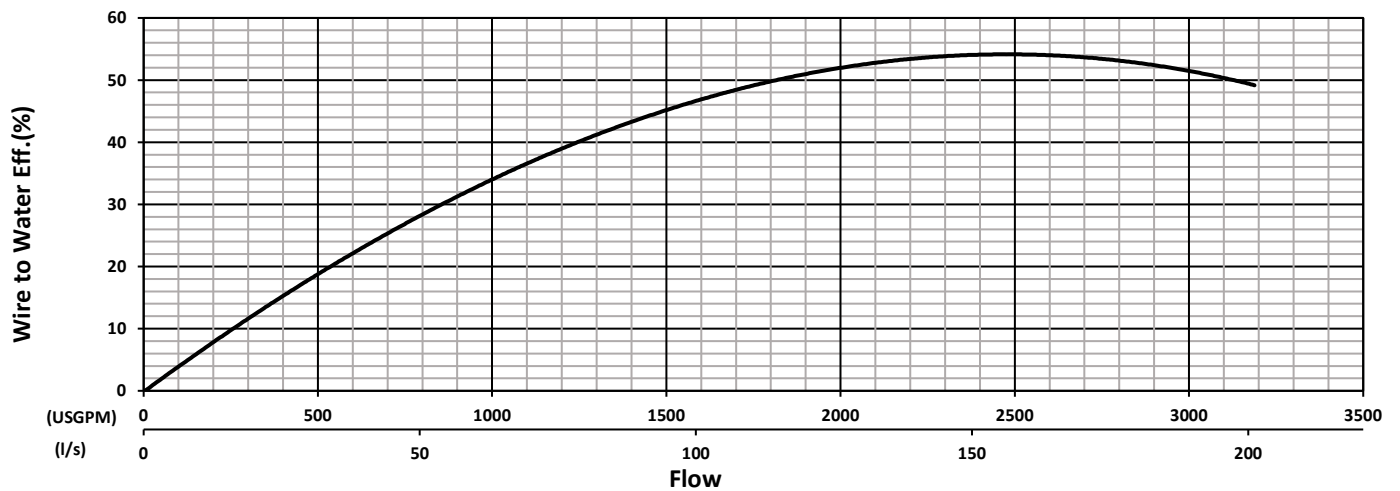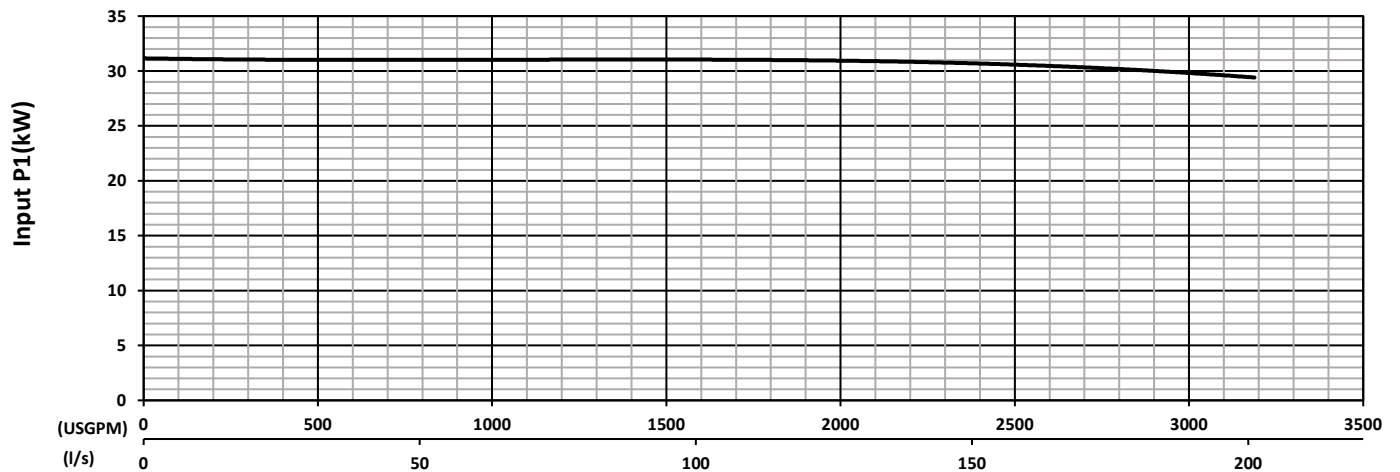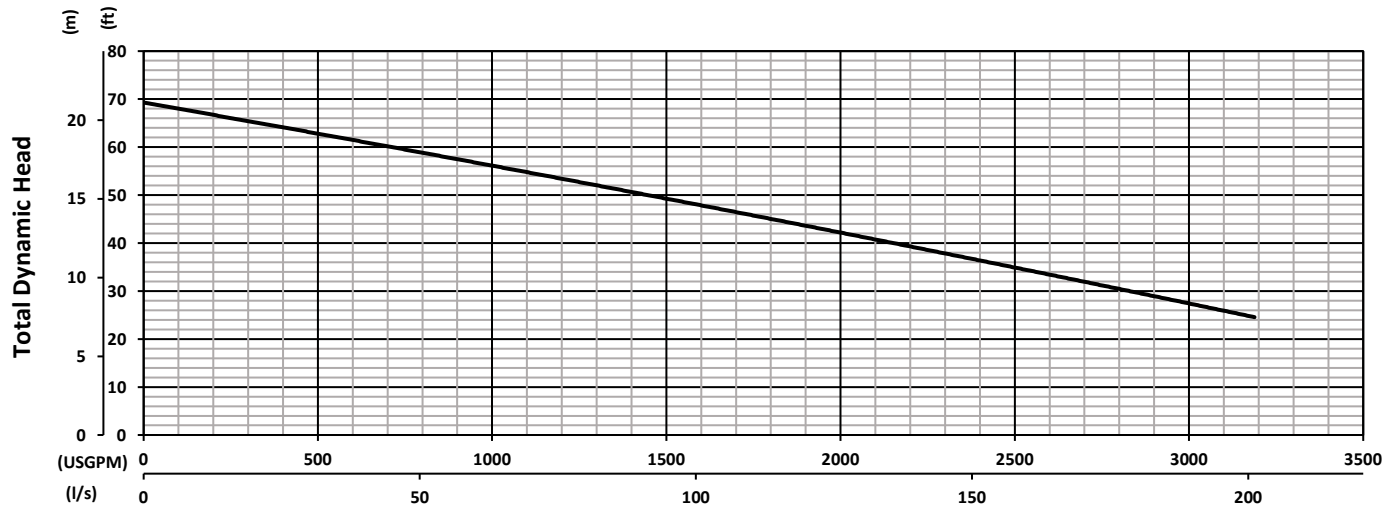

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

263 - Dual Units

Frequency
Pump Speed
Impeller

60 Hz
1750 RPM
257mm

Specifications subject to change without notice