

**TECHNICAL DATA**  
**MODEL KZN150LRF**  
**HI-HARD SEVERE DUTY SLURRY PUMP – CHROME IRON / HI HARD VOLUTE**  
**For High Temperature Service**

**GENERAL DATA**

MAX. FLOW: GPM (L/min)	1611 GPM (6097 L/min)
MAX. HEAD: ft (m)	70.5' (21.4 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SLURRY HANDLING, HIGH TEMPERATURE
SOLID SIZE: in (mm)	1.5" (38.1 mm)
STRAINER OPENING: in (mm)	1.375" (34.9 mm)
IMPELLER DIAMETER: in (mm)	9.44" (240 mm)
DISCHARGE SIZE	6" NPT-MALE
PUMP WEIGHT, without cable: lbs (kg)	581 lbs (264.1 kg)
SHIPPING WEIGHT: lbs (kg)	685 lbs. (311.4 kg)

**CONSTRUCTION/MATERIAL DATA**

DUAL MECHANICAL SEALS	SILICON CARBIDE/SILICON CARBIDE - VITON® FITTED
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON WITH INTERIOR HARDNESS COATING TO 1180 DPH(Rc 71)
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	MULTI VANE, HI-CHROME
STRAINER/STAND	STEEL
LIP SEALS & O-RINGS	VITON
ROTOR SHAFT	410 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN MOTOR STATOR	OIL-FILLED W/ SHELL FM 32, NSF APPROVED
QTY. OIL IN SEAL CHAMBER	125 U.S. FL. OZ. (3700 C.C.), SHELL FM 32, NSF APPROVED
BALL BEARING: OIL LUBRICATED UPPER	6306
BALL BEARING: OIL LUBRICATED LOWER	6310

**ELECTRICAL /MOTOR DATA**

MOTOR: TYPE, RATING HP	Submersible, Oil-Filled , Continuous Duty, 20	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	R, 428°F (220°C)	
MOTOR SERVICE FACTOR	1.15	
VOLTAGE - 3 PH, 60 Hz	460V	575V option
CURRENT F.L.A.	26	19.8
LOCKED ROTOR CURRENT (LRA)	148	128
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)	
POWER CORD: GAGE; LENGTH	A.W.G. 8/4; 50' (15.2m), HIGH TEMP. RATED CORD	
SENSOR CABLE: GAGE; LENGTH	A.W.G. 18/4; 50' (15.2m), HIGH TEMP. RATED CABLE	
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)	
SEAL LEAK DETECTOR <sup>1</sup>	Seal Minder®; MOISTURE SENSING PROBE	

1- Requires a seal fail circuit in control panel for warning signal.


©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive  
 New Haven, CT. 06513, USA  
 Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Viton® is a registered trademark of DuPont Performance Elastomers.  
 Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

**MODEL: KZN150LRF**

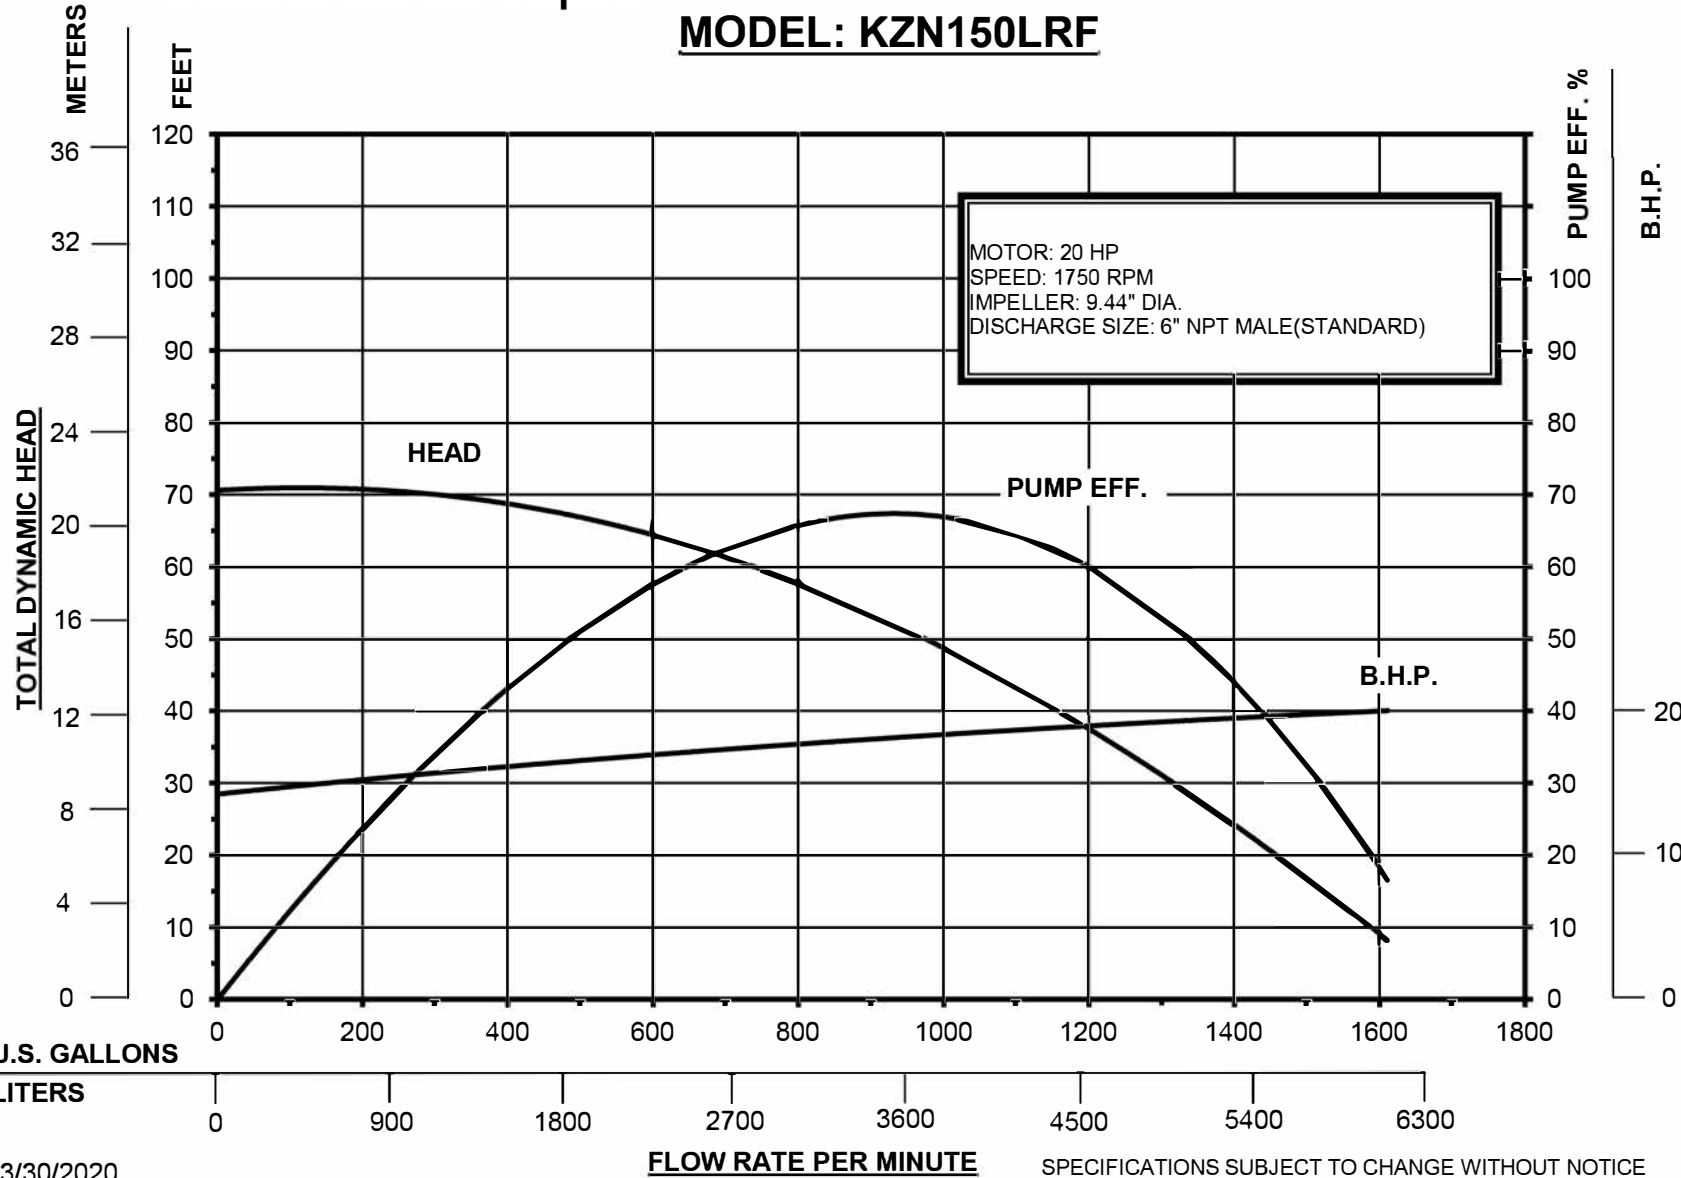

3/30/2020

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE