



**TECHNICAL DATA**  
**MODEL LWA75**  
**LIGHT WEIGHT AGITATOR DEWATERING PUMP—CHROME IRON / DUCTILE IRON**

**GENERAL DATA**

MAX. FLOW: GPM (L/min)	670 GPM (2536 L/min)
MAX. HEAD: ft (m)	85' (26 m)
PUMP TYPE	TOP DISCHARGE, DEWATERING, AGITATOR
SOLID SIZE: in (mm)	0.4" (11 mm)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
MIN. SUBMERSION DEPTH: ft (m)	7.9" (200 mm)
DISCHARGE SIZE	6" NPT
PUMP WEIGHT, without cable: lbs (kg)	181 lbs. (82 kg)
SHIP WEIGHT: lbs (kg)	225 lbs. (102 kg)

**CONSTRUCTION / MATERIAL DATA**

MECHANICAL SEAL - UPPER	CARBON/CERAMIC
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE
MOTOR HOUSING	304 SS
PUMP VOLUTE	HARDENED DUCTILE IRON, 301 BHN
SUCTION COVER	CAST IRON, 223 BHN
WEAR PLATE	HIGH CHROME, 653 BHN
AGITATOR	HARDENED DUCTILE IRON, 477 BHN
IMPELLER	HIGH CHROME, 653 BHN
STRAINER/STAND	STEEL
LIP SEALS & O-RINGS	BUNA-N
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS

**ELECTRICAL / MOTOR DATA**


MOTOR: TYPE, RATING HP	SUBMERSIBLE, 10 (CONTINUOUS DUTY)	
MOTOR RPM	3450	
MOTOR INSULATION CLASS	F	
MOTOR SERVICE FACTOR	1.15	
VOLTAGE - 3 PH, 60 Hz	460V	575V
CURRENT F.L.A.	12.8	10.2
MOTOR PROTECTION	OVERLOAD REQUIRED IN CONTROL	
POWER CORD: GAGE; LENGTH; TYPE	A.W.G. 12/5; 50' (15 m); SOOW(EPR JACKET)	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive  
 New Haven, CT. 06513, USA  
 Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT  
 LWA® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

### MODEL: LWA75

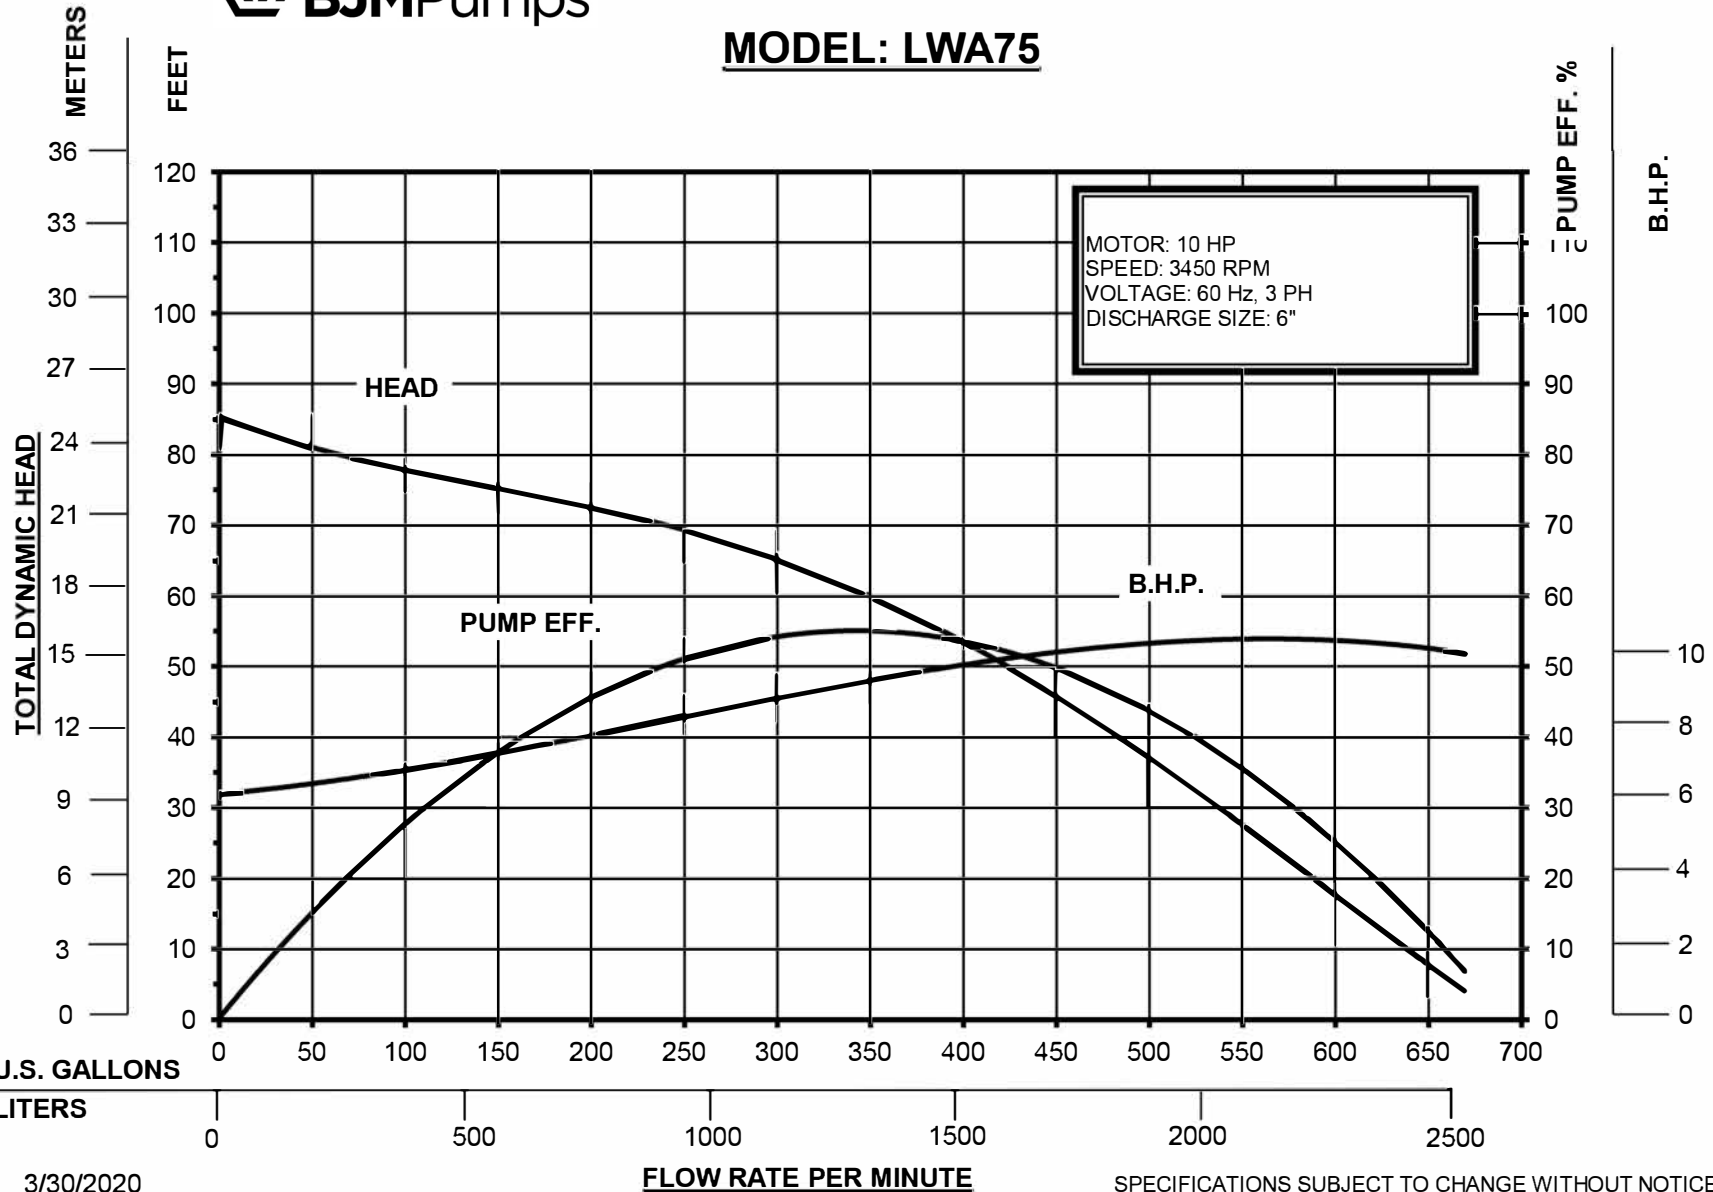

3/30/2020

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE