

TECHNICAL DATA
MODEL SV15C
BJM Pumps® SUBMERSIBLE PUMP - CAST IRON



GENERAL DATA

208/230/460/575V

MAX. FLOW: GPM (L/min)	171 GPM (647 L/min)
MAX. HEAD: ft (m)	29' (8.8 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	NON CLOG VORTEX
MINIMUM SUBMERSION DEPTH: in(mm)	13.5" (343 mm)
SOLID SIZE: in (mm)	2.5" (64 mm)
IMPELLER DIAMETER: in (mm)	3.74" (95 mm)
DISCHARGE SIZE	3" NPT-FEMALE
SLIDE RAIL SYSTEM	3"
PUMP WEIGHT, without cable: lbs (kg)	87 lbs (39.6 kg)
SHIPPING WEIGHT: lbs (kg)	96 lbs. (43.6kg)

CONSTRUCTION / MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/ SILICON CARBIDE, FKM
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE, FKM
MOTOR HOUSING	304 SS
PUMP VOLUTE	DUCTILE IRON
IMPELLER	VORTEX, CAST IRON
LIP SEALS & O-RINGS	BUNA-N
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN SEAL CHAMBER	9.3 U.S. FL. OZ. (275 C.C.)
BALL BEARING: PERM. LUBE. UPPER	6203
BALL BEARING: PERM. LUBE. LOWER	6304

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 2 (CONTINUOUS DUTY ³)			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE ¹ - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	6.3	6	3	2.3
LOCKED ROTOR CURRENT (LRA)	44.6	44	22	15.5
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD			
POWER CORD: GAGE; LENGTH	A.W.G. 16/4; 33' (10m), STOW			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			
SEAL LEAK DETECTOR ² (OPTIONAL)	Seal Minder®; MOISTURE SENSING PROBE			

1- Available in other voltages (and in 50 Hz).

2- Requires a seal fail circuit in control panel for warning signal.

3 - Continuous duty motor – see minimum submersion depth at General Data table above.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

104 John W Murphy Drive
 New Haven, CT. 0613, USA


Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.

© 2020 Industrial Flow Solutions Operating, LLC. All rights reserved.

MODEL: SV15C

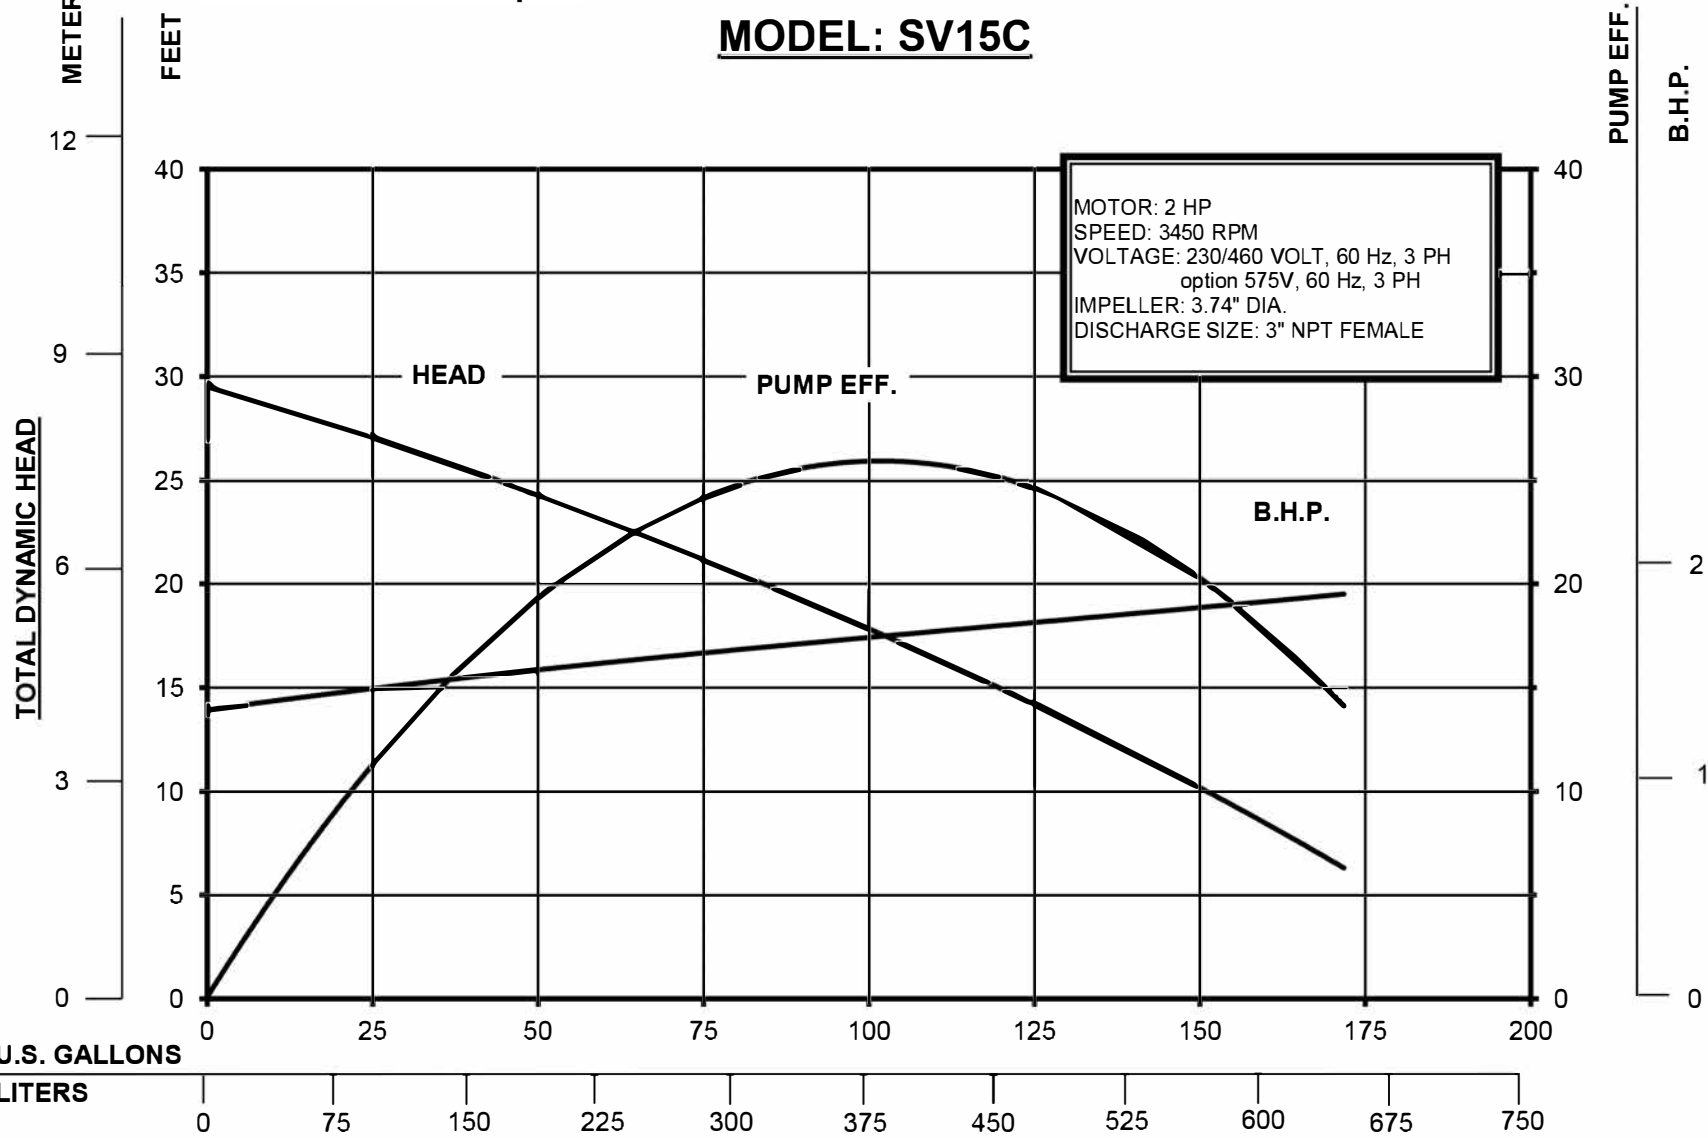

4/29/2020

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE