

INDUSTRIAL
FLOW
SOLUTIONS™**TECHNICAL DATA****BJM Pumps® XP-JX22HSS****Dwg:**

DS-C36-003


Rev:

1

Date:

2/5/2025

GENERAL DATA

APPROVALS:	EXPLOSION PROOF FM APPROVED CLASS1, DIVISION 1, GROUP C & D	
MAX. FLOW:	151 GPM (571.6 L/min)	
MAX. HEAD:	96' (29.3m)	
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths	
PUMP TYPE	DEWATERING	
MINIMUM SUBMERSION DEPTH:	29" (728 mm)	
SOLID SIZE:	0.4" (9.5 mm)	
IMPELLER DIAMETER:	5.52" (140 mm)	
DISCHARGE SIZE	2" NPT-FEMALE	
SLIDE RAIL SIZE	NON-SPARKING 3" SLIDE RAIL, BERS-0320V-EX	
PUMP WEIGHT, without cable:	156.5 lbs (71 kg)	
SHIPPING WEIGHT:	167.6 lbs (76 kg)	

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/SILICON CARBIDE FKM
MOTOR HOUSING	CAST IRON, EPOXY COATED
PUMP VOLUTE	316 SS
IMPELLER	316 SS
STRAINER	316 SS
O-RINGS & LIP SEALS	FKM
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: PERM. LUBE. UPPER	6305ZZC3
BALL BEARING: PERM. LUBE. LOWER	6307ZZC3

ELECTRICAL / MOTOR DATA

MOTOR: TYPE, RATING HP	SUBMERSIBLE, 3 (CONTINUOUS DUTY ²)			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	F			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE - 60 Hz	208V	230V	460V	575V
CURRENT F.L.A.	9.4	8.9	4.5	3.6
LOCKED ROTOR CURRENT (LRA)	52	59	29.5	24
POWER CABLE: GAGE; LENGTH	AWG 14/4, 50' (15.2m), SOOW			
SENSOR CABLE: GAGE; LENGTH	AWG 14/4, 50' (15.2m), SOOW			
MOTOR PROTECTION ¹	TWO NORMALLY CLOSED THERMOSTATS			
SEAL LEAK DETECTOR ¹	SINGLE ELECTRODE LEAKAGE DETECTOR			
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)			


1 - Seal fail and thermal sensor cable must be properly connected to maintain warranty

2 - Continuous duty motor - see minimum submersion depth above

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA
(860) 631-3618 • www.flowsolutions.com

MODEL: XP-JX22HSS

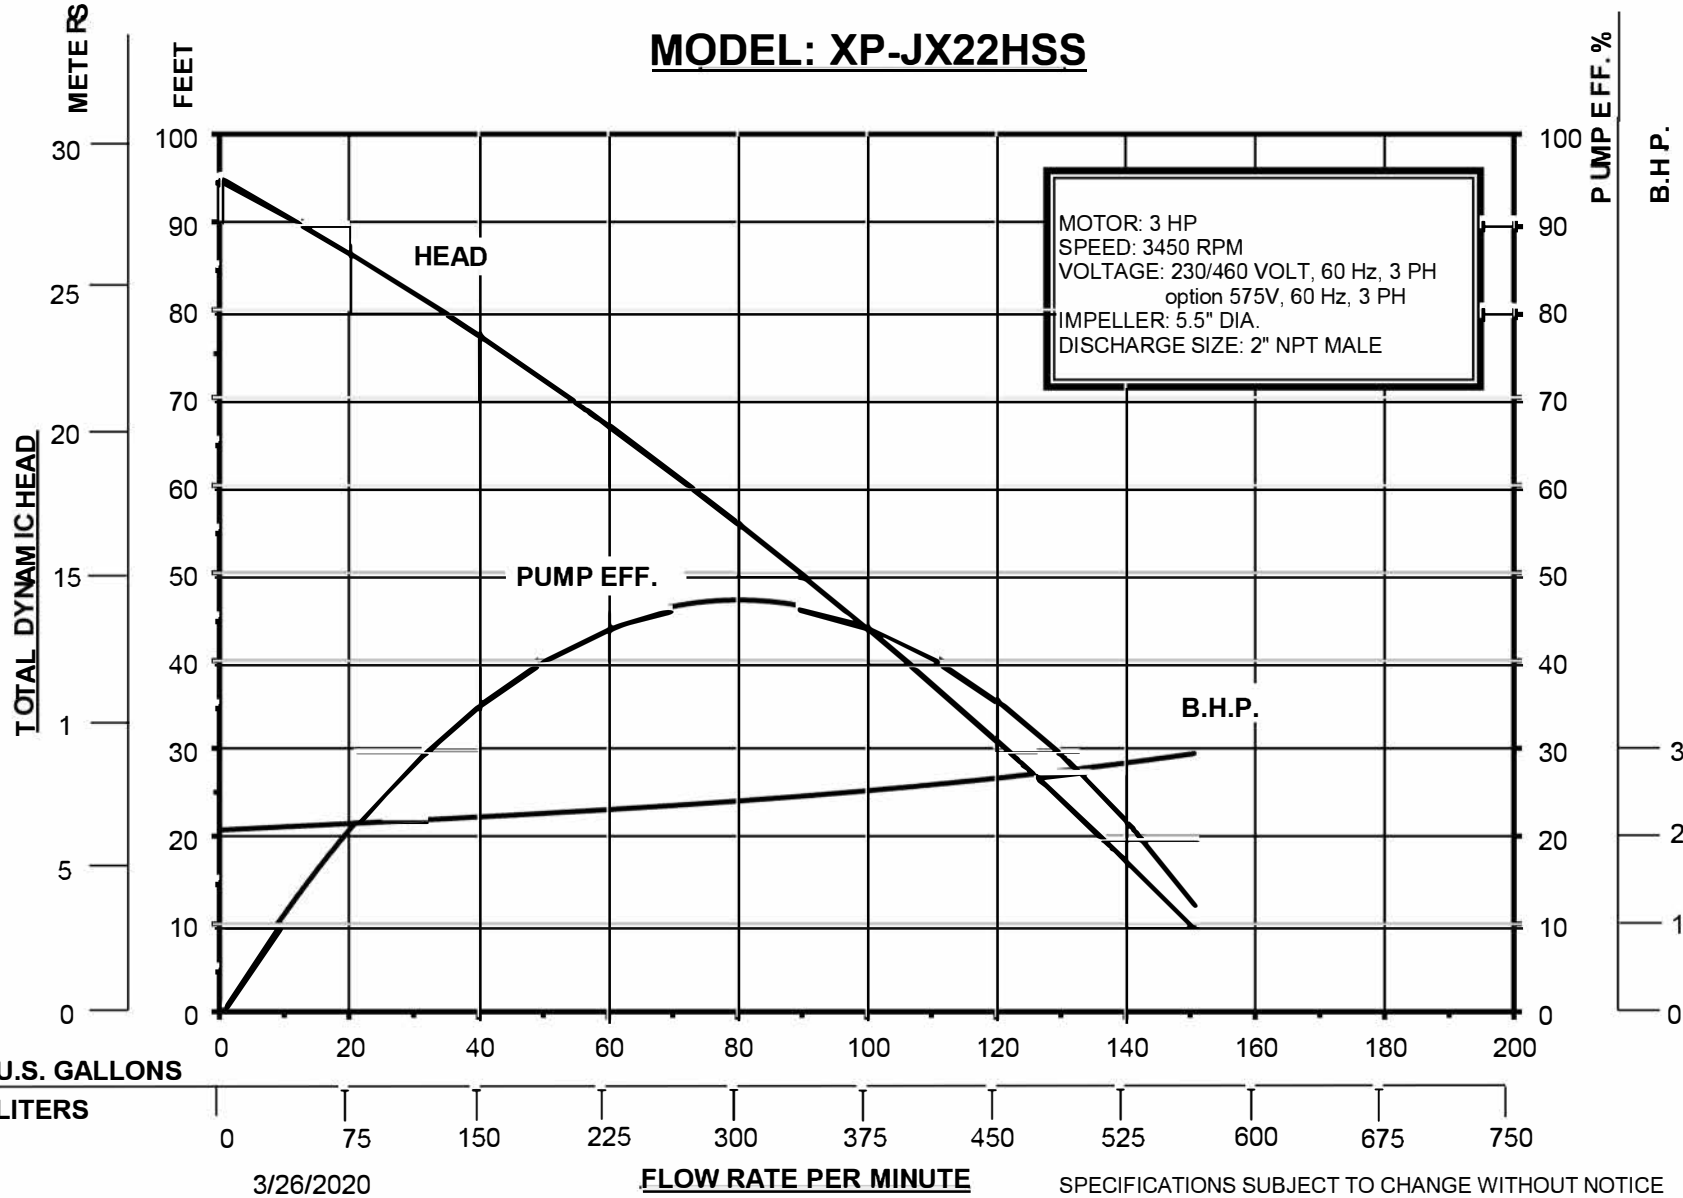

3/26/2020

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE