



INDUSTRIAL
FLOW
SOLUTIONS™

TECHNICAL DATA

Stancor® Dewatering Pumps S750 HH & HV

Dwg: DS-A18-011 Rev: 6 Date: 2/23/2026

Motor Specifications

Motor Design	NEMA design B, squirrel cage induction, air filled
Motor Type	Enclosed submersible, IP 68
Maximum	65 feet (20m)
Insulation Class	Class H, rated at 180° C (356° F)
Motor Protection	Bi-metallic Thermal Switch
Bi-Metallic Temp Trip	130° C ± 5° C (266° F ± 41° F)
Service Factor	1.15
Max. Liquid	104°F (40°C)
Voltage Tolerance	± 10% from nominal
CSA Approval (Optional Upon Request)	CSA-C22.2 No. 108-14 - CSA-C22.2 No. 77-95 (R 2009)



Motor Data, 60Hz

Model	Phase	Output Power BHP	Volts	Full Load Amps	Locked Rotor Amps	NEMA Code Letter	Power Factor	Motor Efficiency	Pole/ Speed (Rpm)
								100% Load	
S750	1Ø	6.4	208V	24.3	166.8	F	0.76	0.8	2/3450
			230V	22	151	F	0.76	0.8	2/3450
	3Ø		208V	19.7	135.7	J	0.76	0.8	2/3450
			230V	17.8	122.6	J	0.76	0.8	2/3450
			460V	8.9	61.3	J	0.76	0.8	2/3450
			575V	8.6	49	J	0.76	0.8	2/3450

Materials of Constuction

	Standard	High Chrome
Material	Standard	High Chrome
Upper Motor Lid	356-T6 Aluminum	356-T6 Aluminum
Motor Housing	356-T6 Aluminum	356-T6 Aluminum
Lower Seal Housing	AISI 304 Stainless Steel	ASTM A532 Class III Type Chromium
Volute	356-T6 Aluminum - Rubber Lined	356-T6 Aluminum - Polyurethane Lined
External Hardware	AISI 304 Stainless Steel	AISI 304 Stainless Steel
O-Rings	NBR	NBR
Motor Shaft	AISI 416 Stainless Steel	AISI 416 Stainless Steel
Upper Bearing	Deep groove ball bearing, double shielded	Deep groove ball bearing, double shielded
Lower Bearing	Double row angular contact ball bearing, double shielded	Double row angular contact ball bearing, double shielded
Shaft Seal	SiC/SiC	SiC/SiC
Impeller	AISI 316 Stainless Steel	ASTM A532 Class III Type Chromium

DIMENSIONS, WEIGHT, AND MISC.

Pump weight (without cable)	87 lbs (39.5kg)
Discharge size, HH	3 inch NPT male vertical
Discharge size, HV	4 inch NPT male vertical
Strainer Opening	9mmX22mm

CABLE SPECIFICATIONS

Model	Phase/Voltage	Power Cable*	Length	Outer Jacket	
S750	1Ø	208V	8/3 G-GC	50' Standard	CPE, Heavy Duty
		230V	10/4 SOOW	50' Standard	CPE, Heavy Duty
	3Ø	208V	10/4 SOOW	50' Standard	CPE, Heavy Duty
		230V	12/4 SOOW	50' Standard	CPE, Heavy Duty
		460V	12/4 SOOW	50' Standard	CPE, Heavy Duty
		575V	12/4 SOOW	50' Standard	CPE, Heavy Duty

* Additional cable sizes and materials available for standard and CSA models upon request.

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 •

www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

Stancor® Dewatering Pumps S750 HH

Dwg:




DS-A18-013

Rev:

6

Date:

12/18/25

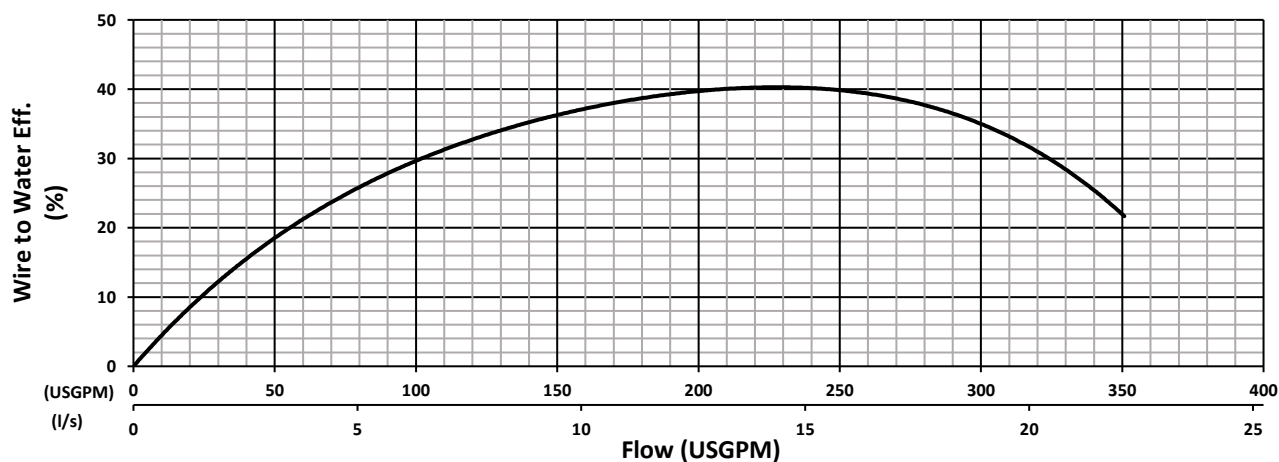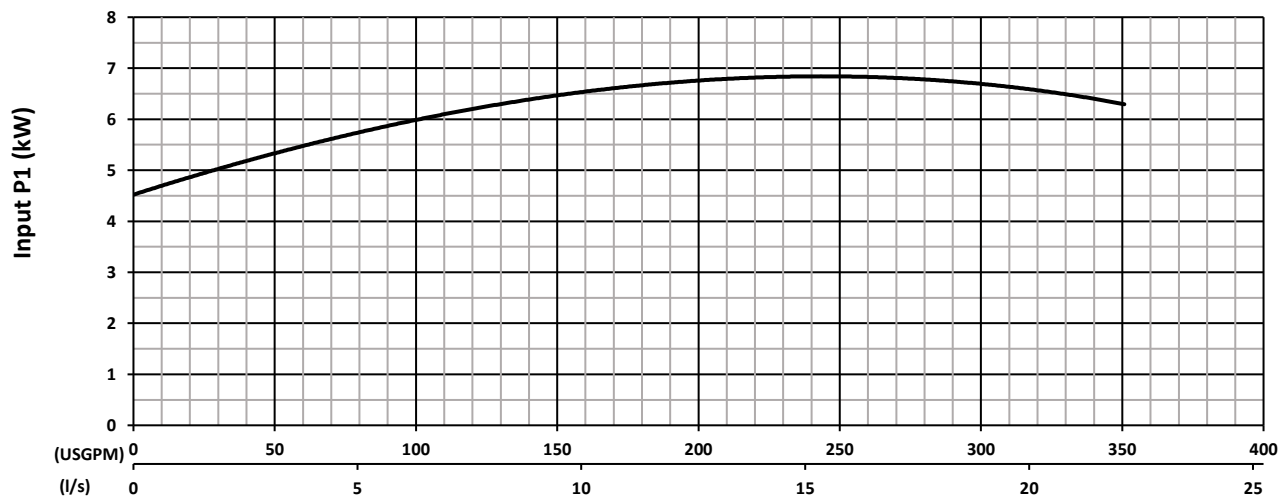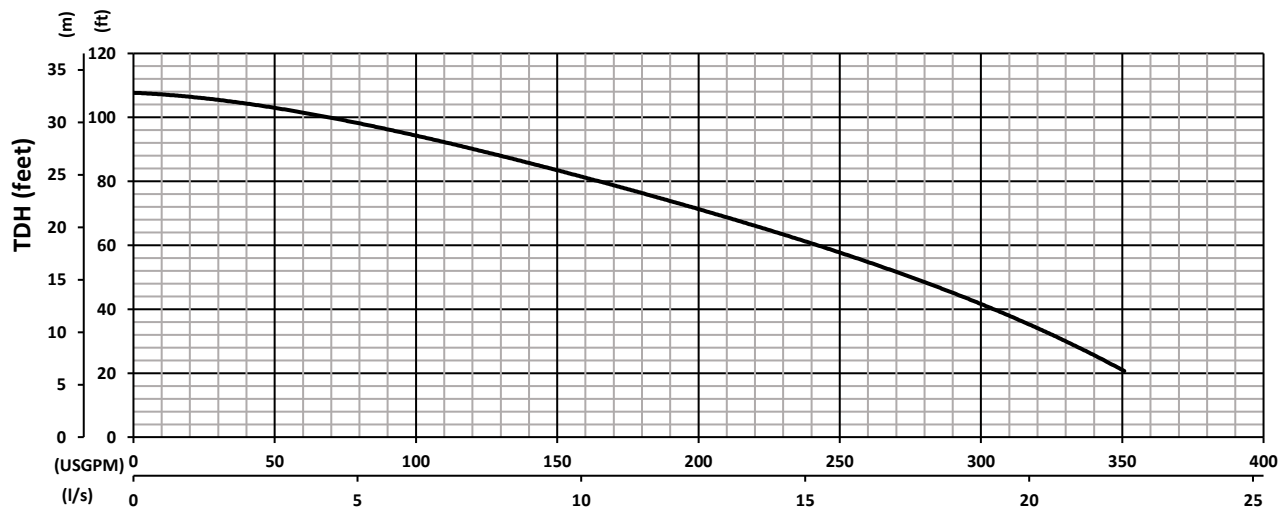

Test Standard : HI 11.6 Gr 3B

Tested with water at 20°C

Dewatering Pumps S750 HH - Dual Units

Frequency 60 Hz

Pump Speed 3450 RPM

Impeller 160mm

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 •

www.flowsolutions.com



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

Stancor® Dewatering Pumps S750 HV

Dwg:




DS-A18-015

Rev:

5

Date:

12/18/25

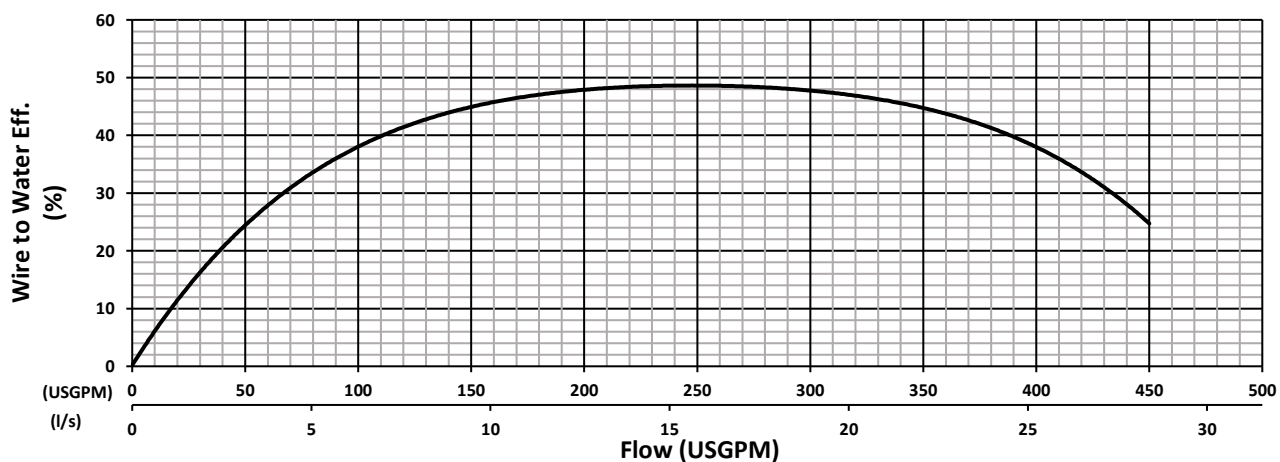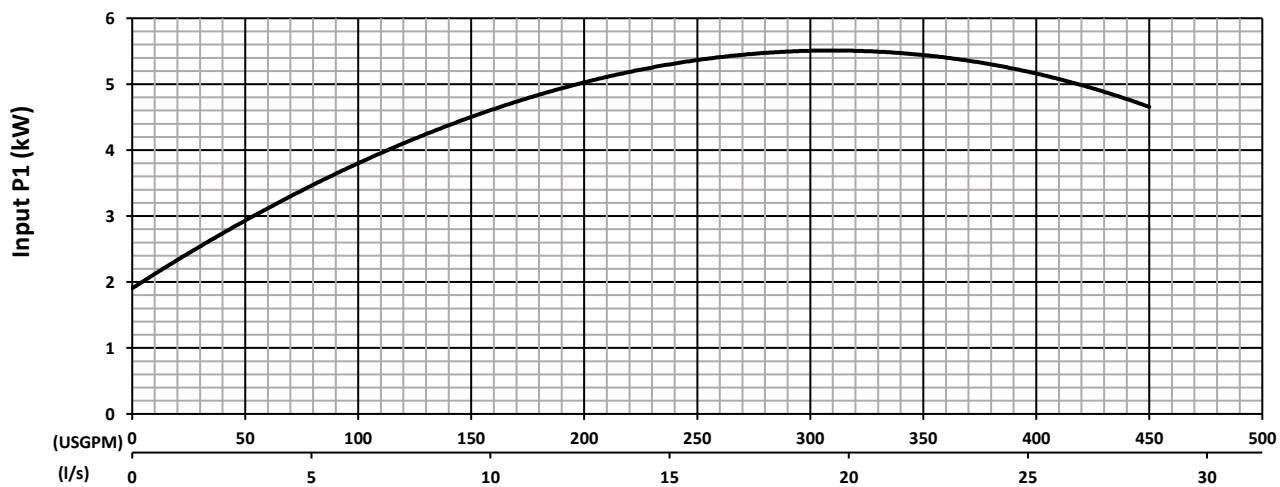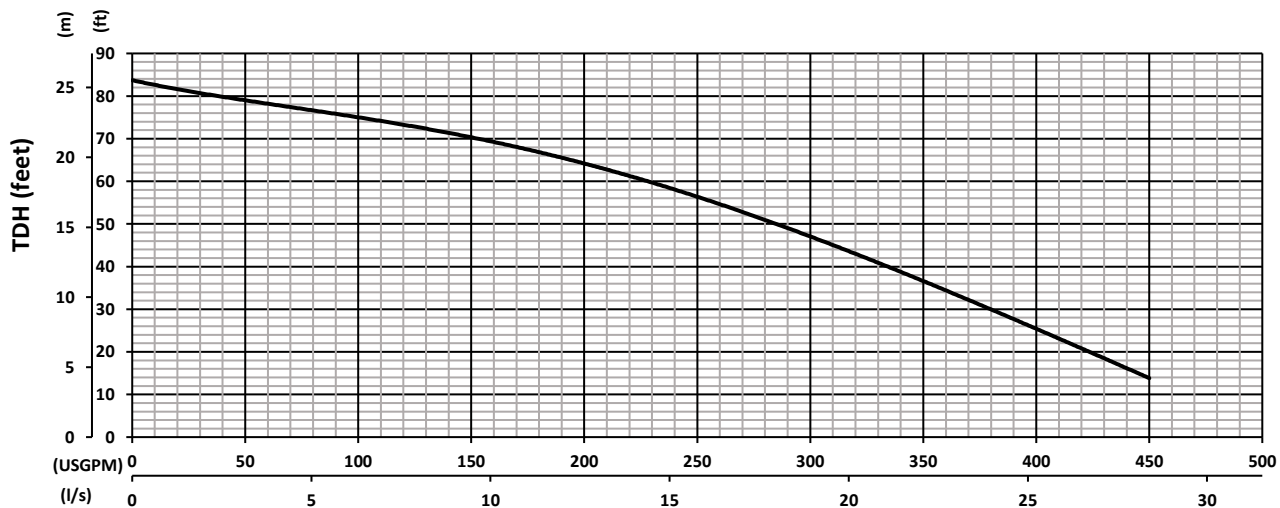

Test Standard : HI 11.6 Gr 3B

Tested with water at 20°C

Dewatering Pumps S750 HV - Dual Units

Frequency 60 Hz

Pump Speed 3450 RPM

Impeller 135mm

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA • 860-399-5937 •

www.flowsolutions.com